

TOOLWEBSM an **ISN** company

TOOL BOOK

Volume 9 • TWTB21

www.toolweb.com



Power Probe Tek



XD



ATLAS
PLATINUM

AIR TOOLS



AIR TOOLS



AIR TOOLS Index:

Air Impact Wrenches	336-346
Nutrunners	347
Air Ratchets	347-350
Air Drills	351-352
Air Hammers	353-355
Air Chisel Open Stock	355
Air Die Grinders	356-361
Cut-Off Tools	361-362
Air Saws	363
Air Specialty Tools	364-367
Air Blow Guns	368-369
Air Tool Lubricants/Oilers	370
Air Fittings	370-375
Air Compressors	376-383
Hoses:	
Rubber Hoses	384-386
Whip Hoses & Snubber Hoses	387-388
Utility Hoses	388
Hose Reels	389-391
Compressor and Inflator Kits	392
Accessories	393

AIR IMPACT WRENCHES



IRT2115QXPA 3/8" Drive Composite Quiet Impact Wrench

- High Speed Performance: 15,000 RPMs allows you to complete jobs faster
- Steel-lined Aluminum Hammer Case: Protects interior components without adding weight
- Lightweight: Only 2.5 lbs.
- Sound baffling design keeps noise to a minimum
- Power Regulator: Manage your output torque by turning down the power regulator to minimize the chance of damage from over-tightening your bolt



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT2115TIMAX 3/8" Drive Titanium Impact Wrench

- Max power - 300 ft-lbs of maximum reverse torque
- Max control - new feather touch trigger and one handed forward and reverse control
- Less than 6" long; weighs less than 2.5 lbs.
- Titanium hammer case is lightweight with unparalleled durability
- 2 year warranty



IRT2115QTIMAX 3/8" Drive Quiet Air Impactool™

- Sound dBA: 93.2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT15QMAX 3/8" Ultra-Compact Impactool

- 475 ft-lbs. of nut-busting torque
- The twin hammer mechanism will reduce vibration
- Only 2.4 lbs
- Push button, forward/reverse buttons, and power regulator dial



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT212 3/8" Drive Super Duty Air Impactool™

- Power up to 180 ft.-lbs.
- Unaffected by air pressure changes
- More torque, less vibration
- Built-in power regulator prevents over torquing
- Pistol style yet extremely compact and lightweight
- Still the most powerful 3/8" pistol-grip on the market, it offers all the advantages of the jumbo hammer impact mechanism for removing and replacing bolts up to 7/16" without a struggle



IRT2125QTIMAX 1/2" Drive Impactool™ with Quiet Technology

- 332 ft./lb. MAX power in reverse from a tool less than 6" long and weighing less than 2.5 lb. - that's best in class power performance
- New 7 vane motor delivers even more power
- Optimized air flow ensures maximum performance
- Titanium - the lightest weight and most durable material available anywhere
- Feather touch trigger enables impressive control



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT2135QTL-2 1/2" Drive Torque Limited Impact Wrench

- Limited forward torque: Prevents overtightening of lug nuts and minimizes the risk of damaging wheels
- Max reverse torque: 780 ft-lbs removes stuck lug nuts with ease
- Advanced impact mechanism: 3x more durable than our previous torque limiting impact wrenches
- Chemical resistant housing: Protects against exposure to shop fluids
- Lightweight: Weighs only 4.3 lbs to help reduce fatigue with repeated use



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT231C 1/2" Drive Super Duty Impactool™

- Maximum torque: 600 ft-lbs
- IR Twin Hammer Mechanism
- Adjustable power regulator
- Pressure feed lubrication



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT231HA 1/2" Drive Super Duty Air Impactool™

- Pressure-fed lubrication system
- Handle exhaust directs air away from user
- Adjustable power regulation
- Maximum torque: 590 ft./lbs. (800 ft./lbs. reverse)
- Contoured comfort handle



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



IRT231HA-2 1/2" Drive Super Duty Air Impact Wrench with 2" Extended Anvil

- In-handle exhaust directs air away from user
- Contoured comfort handle
- 590 ft./lbs. maximum torque
- Pressure feed lubrication system
- Adjustable power regulation

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2235QTIMAX 1/2" Drive Quiet Impact Wrench

- 1,300 ft.-lbs of quiet, nut busting torque, with a twin-hammer impact mechanism
- Only 4.6 lbs.
- At 91.9 dBA IR Quiet Technology
- 2 year warranty, one-handed forward/reverse control, feather-touch trigger and 4-position power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2235QTIMAX-2 1/2" Drive Quiet Titanium Impact Wrench with Extended Anvil

- 1,300 ft.-lbs. of quiet nut busting torque, with twin-hammer impact mechanism
- 2 year warranty, one-handed forward/reverse control, feather-touch trigger, and 4-position power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2235TIMAX 1/2" Drive Impact Wrench

- 1,350 ft.-lbs of nut busting torque, powered by Ingersoll Rand's finely tuned twin-hammer impact mechanism
- Only 4.6 lbs.
- Backed by a 2 year warranty
- One-handed forward/reverse control, feather-touch trigger, and 4-position power regulator



IRT2235TIMAX-2 1/2" Drive Titanium Impact Wrench with Extended Anvil

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2130 1/2" Drive Composite Heavy Duty Impactool™

- 600 ft./lbs. maximum torque
- Full stroke tease throttle
- Easy glide forward/reverse switch
- Multi-position power management
- Lightweight, reinforced aluminum hammercase



IRT2130-2 2" Extended Anvil

- Includes a 2" extended anvil

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT232TGSL 1/2" Drive Street Legal "Thunder Gun" Impact Wrench

- Distinctive appearance, similar to the IR ThunderGun racing tool
- Adjustable power regulator
- Our fastest 1/2" impact wrench
- 625 ft.-lbs max reverse torque
- 500 ft.-lbs forward torque

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2135QXPA 1/2" Composite Quiet Impact Wrench

- With 1,100 ft.-lbs. of nut busting torque. All powered by Ingersoll Rand's finely tuned motor and twin-hammer impact mechanism
- Ingersoll Rand's Quiet Technology reduces the sound of the tool
- Backed by a one-year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT236 1/2" Drive Impactool

- Durable single hammer - impact mechanism reduces overall length for easier access to tough to reach places
- Maximum torque: 450 ft./lb



IRT244A 1/2" Drive Super Duty Impact Wrench

- Powerful, smooth balanced blows
- Pressure feed lubrication system automatically greases the impact system
- Working torque: 40-350 ft./lbs
- Maximum torque: 500 ft./lbs
- Variable speed trigger
- 1 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR IMPACT WRENCHES



IRT2145QIMAX

3/4" Drive Composite Impact Wrench

- 1,350 ft-lb maximum reverse torque from a tool that weighs just 7.4 lbs and is compact enough to access tight spaces
- Designed to withstand tough use
- An air motor that's 16% more efficient
- 2 year limited warranty
- Quiet Technology - 91.1dBA

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2161XP

3/4" Drive Ultra Duty Extra Performance Air Impact Wrench

- Most powerful 3/4" impact in the industry
- Maximum torque: 1,250 ft./lbs.
- Full power reverse
- 3 position power regulator
- 360 degree swivel inlet



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT261

3/4" Drive Super Duty Air Impact Wrench

- Jumbo hammer mechanism
- Up to 1,100 ft-lbs of torque
- Trouble free, longer performance aided by the Pressure-Feed Lube System
- Compact; only 8.8" long
- Handle exhaust



IRT261-3

3/4" Drive Super Duty Air Impact Wrench with 3" Anvil

- Jumbo hammer mechanism
- Up to 1,100 ft./lbs. of torque
- Trouble-free, longer performance aided by the Pressure-Feed Lube System
- Compact and only 7-5/8" long
- Handle exhaust



IRT261-6

3/4" Drive Super Duty Air Impact Wrench with 6" Anvil

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT259

3/4" Drive Impact Wrench

- Delivers 1,050 ft-lbs of maximum torque in both forward and reverse
- New ergonomic design for easy two-handed operation
- Two power settings in forward and reverse
- Lightweight at only 8.8 lbs
- Silenced exhaust reduces tool noise to only 91.6 dbA while in use



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



IRT2155QIMAX

1" Drive Air Impact Wrench 2000Ft-Lb

- 1350 ft-lb (1830Nm) maximum reverse torque from a tool that weighs just 7.4lbs (3.36kg) and is compact enough to access tight places
- Built to last and designed to withstand tough use in rugged environments; a two-year limited warranty is standard
- An air motor that's 16% more efficient than its predecessor and an easy-to-clean inlet screen means less downtime, better tool performance, and less money spent on compressed air



IRT271

1" Drive Super Duty Air Impact Wrench

- Impressive power-to-size ratio
- Up to 1,100 ft./lbs. of torque
- Pressure-feed lube system
- Dead handle improves operator control
- Free-speed 5,500 RPM

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT293

1" Drive Super Duty Air Impact Wrench

- Up to 2,000 ft.-lbs. of torque
- Most powerful 1" wrench
- Handle exhaust
- The most powerful 1" wrench for spring work, tractor pads, bus maintenance, and off-road and farm equipment work
- Built-in pressure-feed lube system protects the unique twin hammer impact mechanism as it delivers the ultimate in power



IRT295A

1" Drive Heavy Duty Air Impactool™

- 1,770 ft./lbs. maximum torque at 120 PSI with 5,250 rpm free speed and a high efficiency 6 vane motor
- Fast torque delivers 1,000 ft./lbs. in 2 seconds
- Handle exhaust directs air away from the work
- Top mounted dead handle provides great leverage
- 3 position power regulator for torque management
- 1 year warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT2175MAX

1" Drive Pistol Grip Impact Wrench

- Delivers 2,000 ft lbs of reverse torque
- Chemical resistant housing & steel core
- Lightweight: Weighs in under 20 lbs
- 360 Degree adjustable handle: Keeps hoses from getting tangled so you can move freely around the garage

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



IRT2850MAX

1" D-Handle Impact Wrench

- High power design delivers 2,100 ft-lbs of torque. Our most powerful tool in the vehicle repair lineup
- Designed and tested for durability, which is backed by a 2-Year Warranty the steel core and chemical resistant housing is made to last even in the harshest working conditions.
- At only 21 lbs., the lighter weight design reduces user fatigue.
- With a steel core and solid steel impact mechanism, the 2850MAX is solid enough to handle real work day in and day out without power fading over time
- 25% lighter than our popular 285B, so it's easy to maneuver and causes less fatigue



IRT285B

1" Drive Heavy Duty Impact Wrench

- High efficiency, 6 vane air motor
- 1,450 ft./lbs of maximum torque with a 5,000 rpm free speed
- 3 position power regulator
- Includes protective boot kit
- The integral 460 degrees swivel inlet makes kinked hoses a thing of the past
- Side handle provides excellent maneuverability



IRT2850MAX-6

1" D-Handle Impact Wrench with 6" Anvil

- Delivers 2,100 ft-lbs of torque
- The steel core and chemical resistant housing is made to last even in the harshest working conditions
- At only 21 lbs this light weight design reduces user fatigue
- 2 year warranty on material and workmanship



IRT285B-6

1" Drive Heavy Duty Impact Wrench with 6" Anvil

- Maximum torque: 1,770 ft-lbs
- New Fast-Torque feature delivers 1,000 ft-lbs in 2 seconds
- New increased pressure rating can withstand 120 PSI for better durability
- Improved feather-touch trigger
- Free chemical resistant protective boot helps prevent damage

AIR IMPACT WRENCHES



CPT724H

3/8" Drive Heavy Duty Impact Wrench

- Maximum torque: 200 ft.-lbs.
- Pin clutch mechanism in oil bath
- Curved handle with Thermo-Plastic Rubber injected in housing for a durable/comfortable grip
- Full teasing trigger
- 360° air inlet swivel keeps air hose from being twisted
- One hand push button forward/reverse power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT721

3/8" Drive Heavy Duty Air Impact Wrench

- Working torque: 5-50 ft.-lbs.; maximum torque: 75 ft.-lbs.
- Rocking dog clutch
- Energy efficient motor
- Pistol-type grip
- Free speed: 11,000 RPM

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7731

3/8" Stubby Impact Wrench

- Ultra compact and powerful: 415 ft.-lbs in reverse
- Rugged and lightweight: steel front cover and aluminum alloy body
- All controls on front of tool and adjustable for either right or left handed operation • Only 4.4" long

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7727

3/8" Angle Impact Wrench

- 185 ft.-lbs of maximum torque in reverse
- Steel motor • Aluminum housing
- Full teasing trigger • Only 2.5 lbs.
- 3 positions in forward and 1 in reverse

CPT7737

1/2" Extended Angled Impact Wrench

- 220 ft.-lbs of max. torque in reverse

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7722

3/8" Drive Butterfly Impact Wrench

- 90 ft.-lbs. • 360° swivel air inlet
- Built in regulator for controlled torque
- Rocking dog clutch • Butterfly throttle

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Chicago Pneumatic

CPT734H

1/2" Drive Heavy Duty Air Impact Wrench

- DYNA-PACT oil bath clutch delivers smooth operation and extended durability
- 360° air inlet swivel
- Air inlet thread: 1/4" NPTF
- Minimum hose size: 3/8"
- Length: 7.5" • Weight: 5.13 lbs.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT749

1/2" Drive Super Duty Air Impact Wrench

- Working torque: 50-450 ft.-lbs
- Maximum torque: 610 ft.-lbs
- CP's patented SpringHammer oil bath clutch
- One-handed reverse button with 4 power settings
- Air inlet thread: 1/4" NPTF
- Weight: 5.5 lbs.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7748

1/2" Drive Composite Impact Wrench

- 960 ft.-lbs of max torque in reverse
- One-hand reverse system (Ring system)
- Hard anodized end plates / Hard chromium aluminum cylinder / Twin hammer mechanism
- 6.89" in length
- Only 4.4 lbs in weight thanks to its composite motor housing
- 360 degree swivel air inlet

CPT7748-2

1/2" Drive Composite Impact Wrench with 2" Extension

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT8940175618

Protective Boot Cover (Only) for Models CPT7748 and CPT7748-2

- Made of durable PVC material
- Adds grip for the handler
- Helps protect the tool from drops and every day use

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR IMPACT WRENCHES



**Chicago
Pneumatic**

CPT7749

1/2" Drive Composite Impact Wrench

- 955 ft.-lbs of extreme torque
- S2S Technology for forward / reverse
- Ergonomic composite handle
- 3 positive power settings
- Full teasing trigger allows full control when tightening or loosening fasteners



CPT7749-2

1/2" Drive Composite Impact Wrench with 2" Extended Anvil

CPT7732C

1/2" Composite Stubby Impact Wrench

- 460 ft.-lbs of maximum torque in reverse
- Steel motor • Aluminum clutch housing
- Side 2 Side (S2S): 1 hand forward/reverse operation
- 2 positions in forward and reverse: max and lower torque



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT7732

1/2" Ultra Compact & Powerful Impact Wrench

- Excellent power to weight ratio: 450 ft.-lbs
- Ultra compact: 4.4" long
- Forward/reverse lever rotates to be on either the left or right side of the tool



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT7736

1/2" Impact Wrench

- 670 ft.-lbs max reverse
- Well balanced minimizing wrist strain
- Metal Tool with Twin Hammer clutch
- 3 power settings in forward and one in reverse



CPT7736-2

1/2" Drive Impact Wrench with 2" Anvil

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT749-2

1/2" Super Duty Impact Wrench with 2" Anvil

- Ultimate torque: 625 ft.-lbs.
- Patented clutch provides smooth operation and extreme durability
- One hand push button forward/reverse power regulator
- 2" extended anvil for tire work



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



**Chicago
Pneumatic**



CPT7769

3/4 in. Composite Air Impact Wrench

- 1440 ft.-lbs of maximum torque in reverse
- Low consumption air motor at 31 cfm
- Insulating and lightweight composite handle
- S2S (side-to-side) easy forward reverse
- Lightweight with a magnesium clutch housing



CPT7762

3/4" Stubby Impact Wrench

- 1050 ft.-lbs. of torque
- Compact at 6.2 inches in length
- Lightweight at 6.6 lbs.
- Twin Hammer mechanism
- Highly durable with a steel motor, and aluminum housing



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT772H

3/4" Drive Super Duty Air Impact Wrench

- 4-position power settings in forward and ultimate power in reverse
- Working torque: 150-700 ft.-lbs
- Maximum torque: 1000 ft.-lbs
- Handle exhaust with 360° air inlet swivel
- Average air consumption: 6 cfm • Air inlet thread: 3/8" NPTF
- Minimum hose size: 1/2" • Sound dBA: 96
- Length: 9.63" • Weight: 10.5 lbs.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT7763

3/4" Drive Heavy Duty High Power Impact Wrench

- 1200 ft.-lbs of torque
- Weighs less than 12 lbs.
- 6-vane motor for speed - power with any 1/2" hose air supply
- Twin hammer high performance clutch
- Ergonomic handle exhaust



CPT7763-6

3/4" Drive Heavy Duty Impact Wrench with 6" Anvil

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



**Chicago
Pneumatic**



CPT7773

1" Drive Heavy Duty Impact Wrench

- 1,200 ft/lbs of ultimate torque providing power to loosen the toughest fastener
- Twin Hammer high performance clutch for longer life under tough conditions
- Efficient 6 Vane Motor - power with any 1/2" hose air supply
- Handle exhaust keeps exhaust away from the operator

Working torque: 100-950 ft./lbs.; free speed: 6300 rpm, 7.5" long, weighs 12.05 lbs.; average air consumption: 7.5 cfm; air inlet thread: 3/8"; sound dBA: 96.



CPT7783-6

1" Drive Lightweight Impact Wrench with 6" Anvil

- 1770 ft.-lbs. maximum torque in reverse • Weighs 20.9 lbs
- Pinless closed reinforced rocking dog mechanism in oil bath
- Features an adjustable top or down exhaust

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT797-6

1" Drive Super Duty Impact Wrench with 6" Anvil

- Working torque: 150-900 ft.-lbs.; maximum torque: 1400 ft.-lbs
- Rocking dog clutch • Teasing throttle for easy bolt starting

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7778-6

1" Drive Impact Wrench w/ 6" Anvil

- 1,450 ft.-lbs. torque provides power to loosen rusted bolts
- High performance clutch provides longer life under tough conditions
- High efficiency 6 vane motor for maximum performance
- Bottom exhaust directs exhaust away from the operator
- Three position power regulator with directional control

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



**Chicago
Pneumatic**



CPT7782

1" Drive Impact Wrench, Short Anvil

- Powerful 1,920 ft. lbs of maximum torque in reverse
- Durable, closed reinforced rocking dog impact mechanism
- Regulator with integrated forward/reverse with 3 position power settings in both directions • Full teasing throttle



CPT7782-6

1" Drive Heavy Duty Impact Wrench with Extended Anvil



CPT7782-SP6

1" Drive Heavy Duty Impact Wrench with 6" Extension and #5 Spline

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT6120-D35H

1-1/2" Drive Impact Wrench

- 2-Jaw clutch for superior ergonomics and productivity
- Very robust steel clutch housing and aluminum motor housing
- Extremely comfortable handle and adjustable support handle
- Interchangeable inside/outside trigger (parts included)
- Reverse biased 15%, possibility to change to forward biased by turning around the air motor cylinder

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



KTi81550

3/8" Butterfly Drive Impact Wrench

- Built-in power regulator features instant throttle speed
- 11,000 rpm • 3/8" square drive • Rear exhaust
- 5-50 ft-lbs working torque • 75 ft-lbs ultimate torque
- 3 CFM average air consumption

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTi81560

3/8" Pistol Grip Drive Impact Wrench

- 11,000 rpm • 5-50 ft-lbs working torque
- 75 ft-lbs ultimate torque
- 3/8" square drive • 5" length; 2.5 lbs.
- 3 CFM average air consumption

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTi81200

Impact Wrench 3/8"

- Impact Wrench 3/8"
- 3/8" square drive
- Free Speed: 12,000 RPM; Maximum Torque: 430 ft-lbs; Working Torque Range: 25-250 ft-lbs; Air Inlet: 1/4"
- Hose size: 3/8" (10mm) I.D.; Air Pressure: 90 PSI (6.2 BAR)
- Average Air Consumption: 4 CFM (113 L/min)
- Covered by a 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTi81565

3/8" Drive Air Impact Wrench

- 25-300 ft./lbs. • 320 ft-lbs ultimate torque
- 3 cfm air consumption • 9,000 rpm
- 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTi81201

3/8" Drive Mini Impact Wrench

- Maximum Torque: 350 ft/lbs (470Nm); Free Speed: 8500 RPM; Air Pressure: 90 PSI; Average Air Consumption: 5.3 CFM; Weighs: 3.75 lbs
- Twin hammer structure, high torque output
- Lightweight, powerful and compact
- One hand control, easy to operate
- Covered by a 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTi81301

1/2" Drive Mini Impact Wrench

- Maximum Torque: 380 ft/lbs (520Nm); Free Speed: 8500 RPM; Air Pressure: 90 PSI; Average Air Consumption: 5.3 CFM; Weighs: 3.85 lbs
- Twin hammer structure, high torque output
- Lightweight but designed for heavy duty
- Covered by a 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTi81622

1/2" Drive Impact Wrench

- 25-180 ft./lbs. working torque
- 260 ft-lbs ultimate torque
- 7,000 rpm • 4 cfm air consumption
- 90 PSI air pressure (recommended)
- "Rocking Dog" clutch and built-in power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR IMPACT WRENCHES



KT181631A

1/2" Drive Air Impact Wrench

- 25-350 ft./lbs. working torque
- 450 ft.-lbs ultimate torque • 7,500 rpm
- 7 cfm air consumption
- 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181772A

3/4" Drive High Performance Impact Wrench

- 100-500 ft.-lbs working torque
- 800 ft.-lbs. ultimate torque
- 4,500 rpm
- 5 cfm air consumption

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181774

3/4" Drive Air Impact Wrench

- 100-950 ft./lbs. working torque
- 1200 ft.-lbs ultimate torque • 4,500 rpm
- 8 cfm air consumption
- 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181795

1" Drive Air Impact Wrench with 13 Piece SAE Socket Set

- 100-1100 ft./lbs. working torque
- 1500 ft.-lbs ultimate torque
- 3,500 rpm • 8 cfm air consumption
- 90 PSI air pressure (recommended)

Comes with 13-piece 1" drive short fractional impact socket set, including sizes 3/4" to 3" (KT135113)



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181350

Impact Wrench 1/2" w/2" Ext Anvil

- Impact Wrench 1/2" w/2" Ext Anvil
- Free Speed: 8,000 RPM; Maximum Torque: 680ft/lbs; Working Torque Range: 25~400ft/lbs
- Air Inlet: 1/4" • Hose Size: 3/8" I.D.
- Air Pressure: 90 PSI; Average Air Consumption: 4.2 CFM
- Covered by a 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181798S

1" Spline Drive Impact Wrench

- # 5 Spline Drive Anvil
- 1600 Foot Lbs. of Torque
- 6" extended anvil for extra access
- 3 forward and 3 reverse power settings with D Side handle for ease of use
- Covered by a 1-Year Warranty



KT181798A

1" Drive Impact Wrench with 6" Extension Anvil

- 1600 ft/lbs of torque
- 4,000 RPMs
- 100-1,200 ft/lbs working torque
- 10 CFMs • 6" extended anvil for extra access
- 3 forward and 3 reverse power settings
- Length: 22-1/2" • Weight: 26.2lbs • 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT181797A

1 in. Composite Heavy Duty Air Impact Wrench

- Composite Heavy Duty Air Impact Wrench -
- Driver size: 1", Bolt Capacity: 1.417 inches (36mm)
- Inlet (NPT): 1/2", Minimum Hose Size: 1/2"
- Air consumption: 47 SCFM, Free Speed: 4500 rpm
- Working Torque: 1600 ft.-lbs, Maximum Torque: 1800 ft.-lbs
- Clutch Type: Twin Hammer, Weight 14.123 pounds
- Warranty is repair up to 1-Year



AIR IMPACT WRENCHES



SPJSP-7150-V8

3/4" Composite Impact Wrench

- 1,100 ft./lb. max torque, higher torque for stubborn fasteners
- Twin hammer mechanism is durable and hard hitting using fewer parts and less down time
- 4 speed positions control gives more control when tightening fasteners, full power reverse for easier removing of fasteners
- Convenient SAS (side and side) system offers forward/reverse for one hand operation
- Made in Japan



KNGNC-6236Q

3/4 in. Drive Air Impact Wrench

- Powerful, 1200 ft-lbs in under 5 seconds
- Light weight and compact design, only 5.9 lbs.
- Twin Hammer type impact
- Quiet, only 83 dBA
- Two year warranty

SUNEX[®]

T O O L S



SUNSX231P

1/2" Drive Premium Impact Wrench

- 500 ft-lbs of max. torque
- Superior anvil constructed of special alloy lasts 33X longer than average
- Reverse bias technology increases torque
- Free Speed 7,000 rpm; average air consumption: 7.0 CFM; air pressure 90 PSI; air inlet: 1/4"; sound: 107 dBA

SUNEX[®]

T O O L S



SUNSXMC38

3/8" Drive Super Duty Mini Impact Wrench with Grip

- Powerful 550 ft-lbs motor
- Lightweight aluminum housing
- Compact design ideal for tight spaces
- Unique one hand forward/reverse control

SUNSXMC12

1/2" Drive Super Duty Mini Impact Wrench with Grip

- Warranty: 2 Year



SUNSX4355

Sunex® Tools 3/4 in. Drive Impact Wrench

- 1400 ft./lbs. of quiet power
- One hand forward/reverse
- Quiet Tech™ exhaust system delivers 90 dBA
- Weighs only 7.3 lbs.
- Covered under a 2 year limited warranty



SUNSX4360-6

1" Drive Lightweight Super Duty Impact Wrench with 6" Anvil

- Weighs only 15.9 lbs with 1,600 ft-lbs of torque
- Unique ergonomic sway back handle to reduce back fatigue
- Three positions forward
- Inlet has two options depending on operator preference
- 2 year warranty



SUNSX556-6

1" Drive Impact Wrench with 6" Extended Anvil

- 1,600 ft-lbs. of torque
- Only 24.5 lbs. of weight, lightest in its class
- Lower vibration and long last operation
- Three forward and three reverse speeds



NUTRUNNERS



CPT7600XB

1" BlueTork Nutrunner with One Torque Preset

- Air Shut-off clutch at preset torque
- Integrated reaction bar standard with blade
- Low noise level: 79 dB(A)
- Almost no vibration : less than 2,5 m/s²
- Accurate torque (+/-5%)

CPT7600xB Blue Tork tool is the most ergonomic and efficient solution for trucks and buses wheel maintenance with one torque preset. Provides increased operator comfort for greater productivity.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR RATCHETS



IRT1105MAX-D2

1/4" Drive MAX Series Mini Air Ratchet

- MAX power - 30 ft-lb max torque and 300 rpm free speed deliver best-in-class power for stubborn fasteners with the speed to get the job done even faster
- MAX Control - Variable-speed regulator is hand-operable and gives technicians the ability to easily control performance — perfect for use on small fasteners
- MAX Comfort - Ergonomic coupling nut and composite handle ensure operator comfort even during extended use; composite handle insulates from the cold
- Nickel-plated housing provides enhanced corrosion resistance
- Unique head construction provides improved durability and more consistent performance over the life of the tool

IRT1105MAX-D3

3/8" Drive MAX Series Mini Air Ratchet

- MAX POWER - 30 ft-lb max torque and 300 rpm free speed deliver best-in-class power for stubborn fasteners with the speed to get the job done even faster

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT1207MAX-D3

3/8" Drive Premium Air Ratchet

- Max power - 65 ft-lb of maximum torque ensures enough power for tough applications
- Max control - Innovative forward/reverse collar, variable-speed power regulator, adjustable exhaust, and feather-touch trigger combine to offer unprecedented control
- Max comfort - Ergonomic coupling nut and composite handle ensure operator comfort even during extended use; composite handle insulates from the cold
- Patent-pending forward/reverse collar provides unrestricted access to easily change the direction of the tool, which is critical in tight spaces where traditional tools get jammed
- Nickel-plated housing provides enhanced corrosion resistance

IRT1207MAX-D4

1/2" Drive Premium Air Ratchet

- Max power - 65 ft-lb of maximum torque ensures enough power for tough applications

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT105-D2

1/4" Drive Air Ratchet

- 25 ft-lb max torque and 250 rpm free speed deliver impressive power to get the task at hand done fast
- Unique head construction provides improved durability and more consistent performance over the life of the tool
- Low-profile forward/reverse control has a wide diameter for easy gripping and also eliminates accidentally changing directions in confined spaces
- Ergonomic coupling nut and handle ensure a comfortable grip with no sharp edges

IRT105-D3

3/8" Drive Mini Air Ratchet



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR RATCHETS



IRT107XPA

3/8" Drive Air Ratchet

- 54 ft-lbs of maximum torque
- Variable speed lever-style throttle
- 360° adjustable exhaust directs air away from the operator and the work

Based on the industry's most popular ratchet, the 107XP delivers an extra measure of durability with an advanced head design, plus a host of other features.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT109XPA

3/8" Drive Super Duty Air Ratchet

- 76 ft-lbs (103 Nm) maximum torque at 220 rpm free speed
- Variable speed button trigger
- 360° adjustable exhaust directs air away from the operator and the work
- Optimized gear ratio and airflow for extra performance

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SUNEX[®]

TOOLS

SUNSX113

3/8" Drive Air Ratchet

- 45 ft-lbs of torque and 150 rpm
- Torque: 45 ft-lbs
- Free speed: 150 rpm
- Average air consumption: 4 cfm
- Sound Level: 110 dBA
- Air inlet thread size (NPTF): 1/4"
- Min. hose size (I.D.): 3/8"



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT1077XPA

1/2" Drive Air Ratchet

- 54 ft./lbs of maximum torque
- Variable speed lever style throttle
- 360 degree adjustable exhaust directs air away from the operator and the work
- Free speed: 160 rpm
- Weighs 2.75 lbs.



IRT1099XPA

1/2" Drive Super Duty Air Ratchet

- 76 ft-lb (103 Nm) maximum torque at 220 RPM free speed
- Exclusive IR Twin Pawl Plus head design for exceptional durability
- Variable speed button trigger
- 360° adjustable exhaust directs air away from the operator and the work



HAMMERHEAD
LOW PROFILE IMPACTOOL™



IRT2015MAX

3/8" Drive Low Profile

Hammerhead Impactool Air Ratchet

- 180 ft-lb max torque and 7,000 rpm
- A feather-touch trigger, two-position forward power regulator, and conveniently located forward/reverse ring
- A head height of under 2" allows you to safely use in tight spaces
- Knuckle-saver reactionless torque eliminates kickback

IRT2025MAX

1/2" Drive Low Profile

Hammerhead Impactool Air Ratchet

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR RATCHETS



KT182210

Mini Air Ratchet 3/8" Drive

- 3/8" Drive Mini Air Ratchet Wrench
- 3/8" Ratchet
- Torque: 30 Ft/lbs; Free Speed: 300 RPM; Air Inlet: 1/4"; Hose Size: 1/4" ID; Recommended Air Pressure 90 PSI; Average Air Consumption: 2.5 CFM
- Recommended Air Pressure 90 PSI; Average Air Consumption: 2.5 CFM
- Free Speed: 300 RPM

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT182500A

1/4" Drive Air Ratchet

- 25 ft-lbs ultimate torque • 250 rpm
- 2 cfm air consumption
- 7" overall length
- 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT182504

3/8" Drive Heavy Duty Air Ratchet

- 55 ft-lbs ultimate torque
- 11" overall length • 170 rpm
- 6 cfm air consumption, 90 PSI air pressure (recommended)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



**Chicago
Pneumatic**



CPT828

3/8" Drive Heavy Duty Ratchet

- Anti-slip head design
- Efficient 1/2 hp motor and triple idler planetary gear system provide up to 50 ft-lbs of torque
- Teasing throttle
- Specifications: cfm - 4, hose size - 3/8", torque range - 10 to 50 ft-lbs, ultimate torque by hand - 125 ft-lbs, speed - 150 rpm

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7829

3/8" Composite Ratchet

- Powerful: 70 ft-lbs. breakaway torque
- 225 RPM
- Advanced motor, full caged gear, and head design
- Adjustable side exhaust avoids blowing dirt and dust
- Compact: only 10.7 / 272mm long and weighs just 2.6 lbs.

CPT7829H

1/2" Drive Composite Ratchet

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT824

1/4" Drive Standard Duty Air Ratchet

- Working torque: 5-12 ft./lbs.
- Maximum torque: 12.5 ft./lbs.
- Free speed: 220 RPM; average air consumption: 3.75 cfm; air inlet thread: 1/4" NPTF; minimum hose size: 3/8"; sound dBA: 90.4; extended length: 7-3/4"
- Easy speed control throughout range
- Extended length
- Compact and lightweight
- Excellent for under-dashboard work, small engine repair and small fasteners
- Economic design for a more productive

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR RATCHETS



SPJSP-7250H 1/4" Drive Low Profile Hex Bit Driver

- Low profile for use in tight areas
- Use with any 1/4" drive bit
- Ratchet style for ease of use
- 360 degree exhaust sleeve
- Reverse lever for one-handed operation

Sealed flat ratchet mechanism, provide a maximum speed of 290 rpm and a maximum torque of 25 ft./lbs. Reverse lever that can be operated with one hand, an air regulator and a 360-degree exhaust sleeve.



SPJSP-7260 1/4" Sealed Flat Head Mini Ratchet

- Lightweight sealed head for long life
- Has an adjustable 4-25ft lbs. of torque
- One handed operation for the forward and reverse lever
- 360° exhaust sleeve allows user to point away exhaust
- Durable and high quality construction expertly made in Japan
- Overall length is 8" and weight is only 1.5 lbs



SPJSP-1765HD 3/8IN Super Fast Mini Impact Ratchet

- Single dog clutch impact mechanism provides a maximum speed of 700 RPM with a maximum torque of 55 ft./lbs.
- Reaction free while still providing high speed and high torque
- Exhibits full performance even in a restricted area
- Durable and high quality construction
- Made in Japan



SPJSP-7730 3/8" Reaction Free High Speed Impact Ratchet

- Reaction free while still providing high speed and high torque
- Max torque: 100 ft.-lbs. 450 rpm
- Durable and high quality construction expertly made in Japan
- 360° rotating rear exhaust deflector
- Single dog clutch impact mechanism



SPJSP-7265W 3/8" Wobble Anvil Sealed Flat Head Mini Ratchet

- Lightweight and patented sealed head
- One-handed operation for the forward and reverse lever
- 360° exhaust sleeve allows user to point away exhaust
- Durable and high quality construction expertly made in Japan
- Overall length is only 8" and weight only 1.5 lbs.



SPJSP-7265 3/8" Sealed Flat Head Mini Ratchet

- Lightweight and patented sealed head
- One-handed operation for the forward and reverse lever
- 360° exhaust sleeve allows user to point away exhaust
- Durable and high quality construction expertly made in Japan
- Has an adjustable 4-25 ft.-lbs of torque
- Overall length is 8" and weight is only 1.5 lbs.



SPJSP-7787 1/2" Heavy Duty Sealed Flat Head Ratchet

- Powerful 80 ft.-lbs. of torque
- Free speed of 250 rpm
- Reverse lever for one-handed operation
- Sealed flat head for long life
- 360° exhaust sleeve

AIR DRILLS



IRT7802RA 3/8" Chuck Heavy Duty Reversible Air Drill

- Reversible motor with a quick reverse lever
- Variable speed throttle for starting holes easily
- Handles smoothly; a lightweight compact drill
- Free speed: 2,000 RPM
- High quality 3/8 in. drill



IRT7802RAKC 3/8" Heavy Duty Air Reversible Drill with Keyless Chuck

- Free speed: 2,000 rpm
- Variable speed throttle
- Reversible motor with a quick reverse lever • Keyless chuck



IRT7807R 3/8" Chuck Standard Duty Air Angle Reversible Drill

- Durable Jacobs multi-craft chuck
- Reversible, with convenient control
- Comfortable lever throttle
- Grease plug for easy preventative maintenance
- Precision machine gearing ensures maximum power transfer and durability



Free speed: 1,800 RPM; Average air consumption: 4 cfm
Sound dBA: 89/102; Air inlet: 1/4"
Rated power: .33 horsepower
Minimum hose size: 3/8"
Weight: 2.47 lbs.; Length: 8.1"



KTI87130 1/4" Drive Straight Air Drill Without Chuck

- 2,500 rpm
- 4 CFM air consumption
- 1/4" air inlet • 1.9 lbs.
- Capacity designed for work in close quarters. Durable, light-weight design



WARNING: Cancer and Reproductive Harm -
www.P65Warnings.ca.gov



IRT7803R 1/2" Chuck Heavy Duty Air Reversible Drill


- Quick reverse lever
- Variable speed throttle
- Heavy-duty ball and needle bearing
- More power and long tool life
- Planetary gear reduction balances the load



Even the tightest screws back out with ease under the force of the 1/2 hp motor. Free speed; 400 RPM; rated power: .5 horsepower; average air consumption: 4 cfm; sound dBA: 92.9/105.9; air inlet NPTF: 1/4"; minimum hose size: 3/8"; weight: 3.3 lbs.; length: 8.7".

IRT7803RAKC 1/2" Heavy Duty Air Reversible Drill with Keyless Chuck

- Quick reverse lever
- Variable speed throttle
- Heavy-duty ball and needle bearing
- More power and long tool life
- Planetary gear reduction balances the load

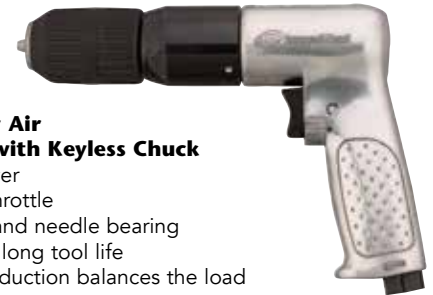

Even the tightest screws back out with ease under the force of the 1/2 hp motor. Free speed; 400 RPM; rated power: .5 horsepower; average air consumption: 4 cfm; sound dBA: 92.9/105.9; air inlet NPTF: 1/4"; minimum hose size: 3/8"; weight: 3.3 lbs.; length: 8.7".



SPJSP-7527KL 1/2" Composite Air Drill, Keyless Chuck

- Lightweight, durable 2.9 pounds with composite body
- Double gear mechanism with free speed of 400 rpm
- Side and side system for one hand operation of forward and reverse
- Air exhaust with muffler at base of handle



AIR DRILLS



KT184218

3/8" Air Drill

- 2,200 rpm • 3/8" keyed chuck
- 3/8"-24 spindle
- Ball and needle bearing spindle component support and machined planetary gearing

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT184228A

3/8" Reversible Air Drill

- Chuck Size: 3/8"; Recommended Air Pressure: 90 PSI; Average Air Consumption: 4 CFM
- Hose Size: 3/8" (10mm); Spindle Thread: 3/8"-24; Air Inlet: 1/4"
- Reversible Motor
- Ergonomic Handle
- Covered by a 1 Year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT184229

1/2" Heavy-Duty Reversible Drill

- 800 rpm • 1/2" keyed chuck
- Reversible • Trigger Speed Control
- Handle exhaust • 4 CFM
- Ball and needle bearing spindle component support

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Chicago Pneumatic



CPT789HR

1/2" Chuck Super Duty Reversible Air Drill

- Free speed: 500 RPM • Handle exhaust
- Teasing throttle for precise control
- Needle bearing gearing

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT9287C

3/8" Keyless Drill

- Reverse lever on top
- Large teasing trigger and progressive valve
- Composite housing
- Powerful 0.6 HP motor

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

CPT785

3/8" Chuck General Duty Drill

- Powerful energy efficient air motor resists stalls
- Triple idler planetary gearing for smooth operation and extended tool life
- Handle exhaust reduces noise and directs air away from work area
- Ideal for accessory and air conditioner installation, engine work and auto body repair

Spindle size: 3/8"-24"

Free speed: 2400 RPM

Average air consumption: 4.13 cfm

Air inlet thread: 1/4" NPTF

Minimum hose size: 3/8"; Sound dBA: 92

Length: 7"; Weight: 2.25 lb.



Chicago Pneumatic



CPT7300C

1/4" Mini Drill

- Reverse lever on top for easier access
- High resistance to stalls due to low speed gear box
- Large teasing trigger and progressive valve allowing more control
- Handle exhaust allows the air to blow away from the operator
- Supplied with high quality industrial Jacobs chucks for longer use



Astro



AST525C

3/8" Reversible Air Drill

- Free speed: 1,800 rpm
- Lightweight, compact size
- One hand reverse lever
- Built-in muffler for noise reduction
- Planetary gear system for long life
- Ergonomic rubber handle



AST1756

3/8", 2 Speed Air Spot Drill Kit

- Adjustable depth stop which allows you to drill out just the spot weld and not the panel beneath
- Drills out the entire spot weld, eliminating the need for grinding
- Lower speed decreases heat and extends drill bit life

Kit Includes: 1 -Air Spot weld drill, 1 -5.5" Deep clamp (bigger and better), 4 -Drill bits (2-8mm, 2-6.5mm), 1 -End line oiler (3000), 1 -3 Way swivel (3SB10), 1 -Plastic blow molded case

AIR HAMMERS



IRT121

Super Duty Air Hammer

- Professional touch trigger for total control
- Long-life tool with a tough one-piece alloy barrel
- Easy to maintain, with an "easy out" throttle valve assembly • 3,000 blows per minute
- 1 yr warranty on material and workmanship



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT121K6

Super Duty Air Hammer Kit

- Up to 3,000 blows per minute
- Alloyed steel barrel and heat-treated piston for longer life
- Built-in power regulator and trigger control

Kit includes: 121 air hammer, blow molded black carrying case, and 6 assorted chisels. Assorted chisels include: (1) 3/4" flat blade chisel, (1) punch chisel, (1) claw ripper-edging tool, (1) single blade cutter, (1) kwik cutter, (1) vee chisel-spot welder breaker.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT115

Standard Duty Air Hammer

- Up to 5,000 blows per minute
- Alloyed steel barrel and heat-treated piston
- Built-in power regulator and trigger control
- 1 year warranty on material and workmanship



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT117

Standard Duty Air Hammer

- Up to 2,000 blows per minute



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT116

Standard Duty Air Hammer

- Up to 3,500 blows per minute
- Handles a range of cutting applications
- Longer life alloyed steel barrel and heat-treated piston



CPT7150

Heavy Duty Air Hammer

- Pistol Grip
- .401 Shank
- 3,000 BPM
- Powerful and Cost Effective
- Longer Piston Stroke for More Power
- Easy Change Retainer for Quick Accessory Changing



CPT7110K

Heavy Duty Air Hammer Kit

- Shank: .401
- Vibration isolation system for smoother operation
- Average air consumption: 3.65 cfm
- Cushioned exhaust deflector on barrel for comfort and control
- Touch trigger for precision start ups and total control
- Kit includes: (1) quick change retainer, (4) chisels



CPT7111

Standard Duty Air Hammer

- Powerful and Cost Effective
- Pistol Grip • .401 Shank • 3,000 BPM
- Easy Change Retainer for Quick Accessory Changing

AIR HAMMERS



**Chicago
Pneumatic**



CPT7160

Low Vibration and Lightweight Short Air Hammer

- .401 Round Shank • 3,500 BPM
- Durable Aluminum motor housing
- Offering 4 adjustable power settings
- Well balanced tool with rubber gripping



CPT7160K

Low Vibration Short Hammer Kit

- Kit contains Bare Tool, Quick Change Retainer, Spring Retainer, Mini Oiler, 5 Piece Chisel Set and Soft Bag



CPT7165

Low Vibration and Lightweight Long Hammer

- .401 Round Shank • 2,500 BPM
- Durable Aluminum motor housing
- Offering 4 adjustable power settings
- Well balanced tool with rubber gripping



**Chicago
Pneumatic**



CPT7165K

Low Vibration Long Hammer Kit

- Kit contains Bare Tool, Quick Change Retainer, Spring Retainer, Mini Oiler, 5 Piece Chisel Set and Soft Bag

CPT717K

Air Hammer Kit

The CP717K is a Super Duty Air Hammer Kit which includes the CP717, a 4 piece .498 chisel set and a spring style retainer all packed in a heavy duty carry case.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT714

Heavy-Duty Air Hammer

- Most controllable CP Hammer available
- Ideal for complete body shop work
- Positive action trigger for precise control over speed range
- Versatile-handles widest range of applications

AIR HAMMERS



KT183275

Regulated Air Hammer

- Independent power regulators and teasing throttle
- Hardened alloy steel barrel
- 3500 BPM; 2-5/8" stroke;
- 3/4" bore; 6-3/4" length; 3.5 lbs; 4 cfm
- Standard .401" shank opening

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT183278

Super Duty Air Hammer

- Air Hammer Medium 0.401" Shank Opening
- Blow per Minute: 3,200 RPM; Bore Size: 3/4"; Stroke Length: 2.6"; Air Inlet: 1/4" NPT; Hose Size: 3/8" ID; Recommended Air Pressure: 90 PSI; Average Air Consumption: 4 CFM
- Recommended air Pressure: 90 PSI; Average Air Consumption: 4 CFM
- Easy Change Retainer For Quick Accessory Change
- Designed for all General Work



LTILT855-AH-SK

Texas Twister Bidirectional Air Hammer Starter Kit

- Bidirectional/pound or pull air hammer
- 2500 BMP air hammer
- Snap air lock plug into front of gun to convert to pneumatic puller
- Unlimited applications in automotive, aircraft, marine, heavy construction equipment, industrial machine repair, farm implement maintenance, manufacturing industries

Includes Texas Twister accessories: LT855-2A - 7" Seal Remover; LT855-5A - 7" Universal Flat Blade Puller; LT855-12 - 1/2-20 to 5/8-18 thread connector.

AIR CHISELS & AIR CHISEL OPEN STOCK



KT181985

6-Piece Air Hammer Drifts Set

- Drop forged body
- CR-MO material for a more durable, longer lasting tool lifetime
- Pin punch by impact tool drive
- Rusted shock and strut bolts are no match for these Air Hammer Drifts
- 7" long parallel shaft
- Includes: Six common sizes: 1/2", 3/8", 5/16", 9/32", 1/4" and 3/16"

KT181987 - Air Hammer Drift, 1/2 in.

KT181988 - Air Hammer Drift, 3/8 in.

KT181989 - Air Hammer Drift, 5/16 in.

KT181990 - Air Hammer Drift, 9/32 in.

KT181992 - Air Hammer Drift, 3/16 in.

KT181991 - Air Hammer Drift, 1/4 in.

TYPE	S & G TOOL AID	K TOOL
Flat chisel	SGT91400 (7")	
Claw ripper	SGT91250	
Cold chisel	SGT91900 (10.5")	
Double cut body ripper	SGT91350	
Hammer	SGT91125	
Rivet and bolt cutter	SGT91500	
Scraper	SGT91150	
Tail pipe cutter	SGT91050	
Tapered punch	SGT91450	
Beehive retaining spring		KT183091
Safety bit retainer		KT183092
Heavy duty quick-change retainer		KT183093
Needle scaler attachment		KT183090

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR DIE GRINDERS



IRT301BK General Purpose Air Angle Die Grinder Kit - 0.25HP

- Delivers 0.25 HP (0.19kW) at 21,000 rpm free speed
- Durable ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Strong aluminum housing withstands tough operating conditions
- Front exhaust helps keep work surface clean
- Kit includes: 10 mounted grinding tips, Blow-molded case

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT307BK Straight Die Grinder Kit - 0.25HP

- Delivers 0.25 HP (0.19 kW) at 28,000 rpm free speed
- Integral safety-lock throttle lever prevents accidental start up
- Strong aluminum housing withstands tough operating conditions
- Front exhaust
- Ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Kit includes: 10 mounted grinding tips, Blow-molded case

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT308BK Straight Die Grinder Kit - 0.33HP

- Delivers 0.33 HP (0.25 kW) and 25,000 rpm free speed
- Lightweight, ergonomic composite housing
- Integral safety-lock throttle lever prevents accidental start up
- Rear exhaust directs air away from the operator
- 1 year warranty on material and workmanship
- Kit includes: 4 burrs.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT5102MAX Angle Die Grinder - Premium

- MAX Power — 0.4 hp and 20,000 rpm motor delivers the power you need for the toughest jobs
- MAX Performance — Spindle lock feature allows for faster abrasive changeovers and optimal lube free design eliminates oil contamination in the work environment
- MAX Comfort — Enhanced grip design and low-profile throttle reduces hand fatigue
- Composite grip design prevents “freezing”

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT301B Angle Die Grinder

- Powerful motor with precision gearing offers 0.25 HP at 21,000 rpm free speed
- Durable ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Strong aluminum housing withstands tough operating conditions
- Front exhaust helps keep work surface clean
- Tool comes with 1/4" and 6 mm collets and two wrenches

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT307B Straight Die Grinder

- Powerful motor delivers .25 HP at 28,000 rpm free speed
- Durable ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Strong aluminum housing withstands tough operating conditions
- Small and lightweight design provides easy operation greater access to tight spots
- Includes 1/4" and 6 mm collets and two wrenches

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IRT409 0.5 HP Straight Air Die Grinder

- Power: The 0.5 HP 4-vane motor delivers the power you need to tackle many applications from smoothing and polishing to deburring, and its front exhaust helps keep your work surfaces clean
- Durability: The durable aluminum housing protects the 409 Air Die Grinder in tough conditions
- Free speed - 27,000 rpm • 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR DIE GRINDERS



IRT308B Straight Die Grinder with Composite Housing

- Powerful motor delivers .33 HP and 25,000 rpm free speed
- Lightweight, ergonomic composite housing helps prevent "freezing" and offers greater operator comfort
- Integral safety-lock throttle lever prevent accidental start up
- Rear exhaust directs air away from the operator
- Tool comes with 1/4" and 6 mm collets and two wrenches

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT5108MAX Straight Die Grinder - Premium

- MAX Power — 0.4 hp and 25,000 rpm motor delivers the power you need for the toughest jobs
- MAX Performance — Optimal lube free design eliminates oil contamination in the work environment
- MAX Comfort — Enhanced grip design and low-profile reduces hand fatigue
- Composite grip design prevents "freezing"
- Industrial grade performance

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT302B Angle Die Grinder with Composite Housing

- Powerful motor delivers 0.33 HP 20,000 rpm free speed
- Durable ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Lightweight, ergonomic composite housing prevents "freezing" and offers greater operator comfort
- Rear exhaust directs air away from the operator
- Tool comes with 1/4" and 6 mm collets and two wrenches

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT345MAX 5" Wheel Heavy Duty Air Angle Grinder

- Featuring a mighty 0.88 horsepower motor this grinder has a best-in-class power-to-weight ratio
- MAX safety: Internal to the tool is a governor, a device used to prevent an over-speed condition and to maximize the speed of the tool while under load, protecting the operator during use
- Built-in lubricating wick optimizes the life of the angle gear set

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

REPAIR PARTS



AIR TOOL REPAIR PARTS AND KITS

Part#	Tool Type
IRT107-TK1	IRT107 ratchet head repair kit
IRT2135-TK2	IRT2135 tune-up kit
IRT231-638-10	IRT231 cap screw

AIR TOOL REPAIR PARTS AND KITS

Part#	Tool Type
IRT231-665-10	IRT231 screw pack
IRT231-706	IRT231 washer
IRT231B-A626	IRT231 anvil for IRT231c, IRT2135ti & IRT232tgsI
IRT231P32	IRT231c cover
IRT231-TK2	IRT231 motor tune-up kit (includes bearings)
IRT231-TK3	IRT231 motor tune-up kit
IRT261P32	IRT261 cover

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR DIE GRINDERS



IRT302BK Ultimate Performance Air Angle Die Grinder Kit - 0.33HP

- Powerful motor delivers 0.33 HP (0.25 kW) and 20,000 rpm free speed
- Durable ball-bearing construction improves balance, reduces vibration, and ensures a longer life
- Lightweight, ergonomic composite housing protects tool from cold air and offers greater operator comfort
- Built-in lubricating wick increases angle gear life
- Integral safety lock throttle lever prevents accidental start up

Kit includes: 2" and 3" quick change backing pads, a variety of 2" and 3" quick change sanding disks, 2" and 3" quick change coarse and medium polishing disks, and a blow-molded case.



IRT3445MAX 4.5" Wheel Heavy Duty Air Angle Grinder

- 4.5" Air Grinder for high performance finishing
- MAX power: featuring a mighty 0.88 horsepower motor this grinder has a best-in-class power-to-weight ratio
- MAX comfort: you will experience MAX Comfort in the grip through the re-designed handle and with an overall tool weight coming in at only 3.5 lbs.
- MAX safety: internal to the tool is a governor, a device used to prevent an over-speed condition and to maximize the speed of the tool while under load, protecting the operator during use
- Built-in lubricating wick optimizes the life of the angle gear set by improving lubrication to the pinion and bevel gear set



**Chicago
Pneumatic**



CPT9108Q-B Mini Die Grinder, 23000 RPM

- 0.32 hp (240W) motor
- Low noise level: only 81 dB(A)
- Built-in air regulator
- Includes 1/4" and 6 mm collets
- 23,000 rpm
- Rubber overmold grip
- Swivel air inlet
- Rear exhaust

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT9106Q-B Compact 90° Angle Die Grinder

- 1/4" and 6mm collets included
- Efficient and powerful 0.32 hp motor
- Low noise level: 80dB(A)
- 23,000 rpm free speed
- Built-in air regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT875 1/4" 90° Angled Air Die Grinder

- Compact, lightweight design for easy maneuverability
- 90 degree angle head allows flexibility in confined areas
- Complete with 1/4" and 6mm collet
- Excellent for high speed blending, smoothing, porting and deburring in confined areas
- Lock-off throttle to prevent accidental start up

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT872 Standard Duty Air Die Grinder

- Free speed: 27,000 RPM
- Adjustable power regulator for precise control
- Lock off throttle to prevent accidental start up
- Rear exhaust

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT876 Mini Air Die Grinder

- Free speed: 30,000 rpm
- Compact, lightweight design
- Lock off throttle to prevent accidental start up
- Complete with 1/4" and 6mm collet
- Built-in regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR DIE GRINDERS



CPT860

Heavy Duty Air Die Grinder

- Rugged, energy-efficient 1/2 hp motor
- Adjustable power regulator for precise control
- Lock off throttle to prevent accidental start ups
- Square handle design for positive grip
- Excellent for cleaning tire moldings, porting and relieving engines, and general high-speed polishing and grinding

Complete with 1/4" and 6mm collet. Free speed: 24,000 rpm; air consumption: 5.25 CFM; Air inlet thread: 1/4" NPTF; minimum hose size: 3/8 in.; sound dBA pressure: 93; length: 5.75; weight: 1.25 lb.



CPT857

7" Heavy Duty Air Angle Grinder

- Powerful 1.25 HP high performance motor for fast metal removal
- Aluminum alloy housing is rugged, yet lightweight
- Spiral bevel gearing in angle head for long tool life and low vibration
- Removable side handle for increased maneuverability
- Use with 7" type 27 grinding wheels for cleaning, deburring, blending and smoothing



SUNEX[®] TOOLS

SUNSX5210

1/4" 1.0HP

Super Duty Die Grinder

- Erickson industrial collet
- Quick set easy release
- Composite housing for lightweight durability
- 20,000 rpm of speed to get the job done quickly
- 2 year limited warranty



SUNSX5206

1/4" 0.5HP

Angled Die Grinder

- Powerful 0.5hp motor • 1/4" collet
- Composite housing for comfort during long usage
- Speed control dial for adjusting tool speed
- Auto-set easy release • 2 year limited warranty



KT187132A

1/4" Mini Air Die Grinder

- Compact, lightweight design
- Lock off throttle to prevent accidental start up
- Free Speed: 25000 RPM; Collet and Air Inlet Size: 1/4"; Hose size: 3/8" ID; Recommended Air Pressure: 90 PSI
- Covered by a 1 Year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT187125

Mini Rear Exhaust Die Grinder

- 25,000 rpm • 1/4" collet • 2 cfm air consumption
- Features full bearing support air motor, rear exhaust independent power regulator and variable speed throttle

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT187135

Air Die Grinder, 3/4 HP with Front Exhaust System

- Free Speed: 24,000rpm
- Collet size: 1/8" - 1/4"
- Air inlet: 1/4", suggested air pressure: 90psi, avg air consumption: 12cfm
- Low vibration facilitates improved working conditions, vibration level less than 2.5m/s2

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT187126A

1/4" Mini Angle Die Grinder

- Collet Size: 1/4"; Inlet Threaded 1/4" NPT; Hose Size: 3/8" ID; Free Speed: 22,000 RPM; Recommended Air Pressure: 90 PSI; Average Air Consumption: 4 CFM
- Right angle head allows easier working within confined area
- Built-in power regulator allows precise control of the speed
- Rear air exhaust helps blow exhaust away from work surface
- Covered by a 1 Year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT187128

Gearless Angle Die Grinder

- 25,000 rpm • 1/4" collet
- 4 cfm air consumption

Tool features drop-in motor, rear exhaust and enhanced muffler system. Lightweight, thermally insulated composite housing reduces vibration. Hardened steel cylinder maximizes air utilization. Grinder's 1/4" collet accepts 1/8", 1/4", 3mm and 6mm shanks.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR DIE GRINDERS


Astro



AST1221 Die Grinder Kit and 8 Piece Rotary Burr Set

- Blue composite body 1/4" Angle Die Grinder, front exhaust
- Blue composite body 1/4" Mini Die Grinder, front exhaust
- 8-piece double cut carbide rotary burr set, 1/4" shank
- Grinders have composite handles that reduce vibration; with rib texture that provides a firm grip
- Grinders have lever throttle for feathering control and built-in regulators

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST219 3 Piece Die Grinder Kit (AST201, AST204 and AST2181)

- AST201 - Composite body 1/4" die grinder with 25,000 rpm
- AST204 - Composite body 1/4" 90° angle die grinder with 20,000 rpm
- AST2181 - 8 piece double cut carbide rotary burr set
- Both die grinders feature rear exhaust and lever throttles
- Burr set includes (in a blow molded case)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST218 1/8" Pencil Type Die Grinder

- Lightweight and ideal for tight spots
- Twist throttle provides variable speed control
- Designed for high speed porting and finishing of small parts
- Ideal for cleaning of dies, rotors, backing plates, brake pads, mounts plus many other applications

Collet size: 1/8"; free speed: 56,000 rpm; overall length: 5-1/4"; air pressure: 90-100 psi; hose length: 5'.

Astro



AST1222 Heavy Duty 1/4" Angle Head Die Grinder and Standard Duty 1/4" Die Grinder Set

- Composite handles reduce vibration and provides a firm grip
- Lever throttle for feathering control
- Built-in regulators

This set includes the AST1240 - Blue composite body 1/4" 90° Angle Die Grinder and the AST1206A - Composite body 1/4" Medium Die Grinder.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST2181B 1/4" Die Grinder and 8 Piece Burr Set Combo

- AST202 - composite body 1/4" medium die grinder - 22,000 rpm - rear exhaust air flow system
- AST2181- 8-piece double cut carbide rotary burr set

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST533ET Pinstripe Removal Tool with Aluminum Body

- Developed for the removal of pinstripes, adhesive, double faced tape and molding with Astro's Smart Eraser® Pad
- Geared at 4,000 RPM
- Spanner wrenches included for easy removal of pad

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SPJSP-1900 1/8" Micro Grinder

- Features a soft grip, a rear exhaust, and a flexible 59" hose
- The Micro Grinder can reach a free speed of 70,000 rpm and has an air consumption rate of 0.7 cfm
- 5.5" long (without the hose) and 0.67" wide

AIR DIE GRINDERS

Dynabrade® Nitro Series 0.3 HP Die Grinders

- Compact, lightweight contemporary tool design permits easy access to tight areas
- Thermoplastic rubber tool grip reduces cold air transmission and absorbs vibration
- Includes safety-lock lever; rotational rear exhaust to direct away from operator
- Smooth, efficient air motor



RIGHT ANGLE DIE GRINDERS

Part Number	Collet Insert	Sound Level	Max Air Flow SCFM (L/Min)	Hose Size Inch (mm)	Air Inlet Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
DYBDGR31	1/4"	86 dB(A)	18 (510)	3/8 (10)	1/4" NPT	1.2 (.54)	6.5 (165)	1.6 (41)
DYBDGR51	1/4"	86 dB(A)	26 (736)	3/8 (10)	1/4" NPT	1.6 (.73)	7.1 (180)	1.8 (46)

STRAIGHT-LINE DIE GRINDERS

Part Number	Collet Insert	Sound Level	Max Air Flow SCFM (L/Min)	Hose Size Inch (mm)	Air Inlet Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
DYBDGS31	1/4"	84 dB(A)	18 (510)	3/8 (10)	1/4" NPT	.98 (.44)	6.2 (157)	1.6 (41)
DYBDGS51	1/4"	83 dB(A)	26 (736)	3/8 (10)	1/4" NPT	1.35 (.61)	7.4 (188)	1.8 (46)

DYB50211

Dynabrade® Right Angle Grinder with Vacuum System

- Powerful .4 hp (298 W) air motor for smooth, controlled sanding
- Powers 3" (76mm) diameter abrasive discs, for efficient material removal on non-ferrous surfaces such as carbon fiber, fiberglass, painted aluminum and more
- Includes 51346 backing pad, for 3" (76mm) diameter locking-type abrasive discs
- 1-1/4" (32mm) diameter vacuum port ready for connection to external or central vacuum system
- Wick-Lube system extends gear life with simple lubrication



CUT-OFF TOOLS



DYBECU4

Nitro Series 4" Diameter Extension Right Angle Cut-Off Wheel Tool

- Model accepts 4 in. (76 mm) diameter Type 41 reinforced Cut-Off Wheels, with 3/8 in. (9.5 mm) center hole
- Composite grip absorbs vibration and reduces cold air transmission to operator
- Lock-lever controlled, multi-position guard
- 14,000 RPM
- 1hp



KT188800

3" Cut-off Tool

- Compact 180 degree disc guard
- Handle exhaust
- Safety throttle lever
- Rubber comfort grip
- Free Speed 18000 RPM; 3/8" Disc hole size; Air inlet 1/4"; 4 CFM avg. air consumption

KTISUM901100

Air Utility/Muffler Cut Off Tool

- 20,000 RPMs
- Air inlet thread 1/4"
- Minimum hose size 3/8"
- Overall length 7-1/2"
- Single speed, non-reversible
- Uses 3" diameter discs, with cutting shield and hand guard trigger
- Cuts clamps, hangers, sheet metal, bumper bolts, and more
- Warranty is repair only up to 1-year



CUT-OFF TOOLS



IRT426

Reversible Cut Off Tool with 5 Cut Off Wheels Included

- 20,000 RPM max free speed
- 3" cutting wheel diameter
- Rear exhaust



IRT326

Heavy Duty Air Cut-Off Tool

- 3/8" arbor x 2-7/8" wheel size
- Fast, quiet operation
- Contoured level throttle with positive self-locking action
- Built in speed regulator
- 360 degree rotatable chrome-plate spark guard



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MADE IN JAPAN

SPJSP-7231

Flex Head Cut Off Tool

- Three-position, flexible head
- Head adjusts 22-1/2° off center in either direction and locks into place for added versatility
- Ergonomic design cushion-grip handle
- Rear exhaust
- Safety throttle lever and built-in power regulator
- Flexible head for greater access into tight work places



SPJSP-7231R

Reversible Flex Head Cutoff Tool

- 3-position Flex Head
- Reversible Feature
- .05 HP Motor
- Built-in power regulator
- Made in Japan



AST209

3" In-Line Cut-Off Tool

- Unique in-line design provides greater control
- Positive control and lock-out throttle protection
- Adjustable protection guard
- Variable speed control
- Chrome plated steel spark guard

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Chicago
Pneumatic



CPT874

General Duty High Speed Cut-Off Air Tool

- Built-in regulator matches speed to job
- Lock off throttle to prevent accidental start up
- Rear exhaust directs air away from work area
- Excellent for cutting through sheet metal, fiberglass, bolts, muffler clamps and hangers as well as grinding down burrs and rough edges

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPTCP9116

Extended Cut Off Tool

- Extended length for better reach - 14.6" overall
- 1 HP motor / 14000 RPM
- 4" cutting wheels
- Spindle lock system and 11 position adjustable swivel guard
- Tapered angle gear housing

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CPT7500D

2" Angle Grinder / Cut Off Tool

- Free speed: 22,000 RPM
- Small at 5.5" in length; compact and lightweight
- Side exhaust directs air away from the work surface; full 180° protective guard
- Tool includes two 2" cutting wheels, one each of 2" 60, 80, 120 grit grinding wheels and CP Exclusive Attachment System

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR SAWS



IRT429

Heavy Duty Air Reciprocating Saw

- Excellent for body shop repair, muffler and exhaust work, and sun roof installations
- Reduced vibration
- Cuts flat and curved surfaces
- Durable, long-life tool

A versatile air saw for cutting intricate shapes and light radius curves in all types of plastics, fiberglass, and composite materials, as well as aluminum and sheet metal.



IRT529

Reciprocating Air Saw - Low Vibration

- Patented vibration reduction device reduces hand fatigue - 88% reduction in vibration
- Composite grip for improved comfort during extended use
- Small, lightweight design provides greater accessibility
- Adjustable rear exhaust directs air away from the work-piece
- Includes (6) blades

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DYBR51

Nitro Series Reciprocating Saw

- A versatile tool used for cutting sheet metal, piping and plastic panels
- Lightweight and easy to maneuver saw.
- Compact, lightweight tool design permits easy use over long periods of time
- Tactile, thermoplastic rubber tool grip reduces cold air transmission
- Rear positioned 360 degree rotatable side exhaust
- Includes safety-lock lever



**Chicago
Pneumatic**



CPT7901

Super Duty Reciprocating Air Saw

- Power at 10,000 strokes per minute
- Lock off throttle for protection against accidental start ups
- Adjustable guide offers flexibility in setting depth of cut
- Ergonomic design for comfort and easy handling

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MADE IN
JAPAN

SPJSP-7610

Recipro Saw (Gear Type)

- Powerful enough to cut steel, FRP, rubber and resin objects such as bumpers, etc.
- Swivel air inlet and rear air exhaust
- Designed with a 0.47" stroke and operates at 5,300 strokes per minute
- Equipped with safety lever, blade guide, and air regulator
- Durable and high quality construction expertly made in Japan

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST936

ONYX Gear Driven Heavy Duty Air Saw

- Industry leading gear-driven design with 250% more cutting capacity than standard air saws
- Cut quicker and thicker up to 1/4" (6.4mm) mild steel
- Accepts universal 1/2" shank standard saw blades
- Strokes per Minute: 7,000
- Avg. Air Consumption: 4.0 CFM

AIR SPECIALTY TOOLS



- KT189275
Needle Scaler Standard Duty**
- 3,500 blows per minute with an extra kick
 - Teasing trigger
 - Independent power regulator

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



- KT189257
Straight Line Needle Scaler**
- Straight line needle scaler with lever throttle
 - 3500 RPM, 4000 bpm, average air consumption 3.5cfm, air inlet 1/4", air hose 3/8"
 - 3mm diameter needles, 6" needle length, 19 needles included
 - Bore diameter 1" • Tool length 18"
 - Repairable up to 1-Year

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



- KT183280
Weld Flux Needle Scaler**
- Converts to a standard scaler in seconds
 - Simple "J" slot adjustment for needle wear or to provide more needle exposure
 - Positive lock retainer

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



- KT189276
3400-4200 bpm Pneumatic Scaler with Double Spring Pistol Grip**
- Pneumatic needle scaler with double spring pistol grip; 3400-4200 bpm
 - Lever throttle contains O-rings to limit air leakage
 - Clamp on style side handle pivots 360 degrees and is lockable
 - Uses 3mm diameter needles
 - Comes in black blowmold case and includes 1 side handle grip, 1 oil pot, 1 steel bushing 3/8" NPT x 1/4" NPT, tube of grease lubricant, 2 replacement O-rings and 19 needles (3mm)



**Chicago
Pneumatic**



- CPT7120
General Purpose Needle Scaler**
- Adjustable sleeve to fit protrusion of the needles to the task to be performed
 - 19-1/8" steel needles with high resistance to wear
 - Easily converts to chisel scaler • 4,800 BPM



- CPT7125
Pistol Needle Scaler**
- Rubber sleeve on handle for better comfort
 - Delivered with 2 sets of needles: 19 x 1/8" (3 mm) and 29 x 5/64" (2 mm) for finer usage
 - Great for rust or paint removal

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



- CPT835
Heavy Duty Air Nibbler**
- 2,750 strokes per minute • Four optional cutting positions
 - Rugged nibbling head and .177" diameter punch cuts steel up to .060" (16 gauge) and aluminum up to .102" (10 gauge)
 - Easy access to punch and die for quick replacement

**SUNEX[®]
TOOLS**




- SUNSX246
Sunex® Tools Pistol Grip Needle Scaler**
- Perfect for surface prep work involving the removal of rust, paint, weld slag. etc.
 - Lightweight aluminum housing
 - Piston design for comfort and control
 - Hardened steel casing and 1/8" hardened steel needles

Astro



- AST4320
In-Line Needle Scaler**
- Ideal for scaling and rust removal
 - Includes needle scaler attachment with 12 high tension steel needles
 - Speed: 4200 bpm • 7" stroke

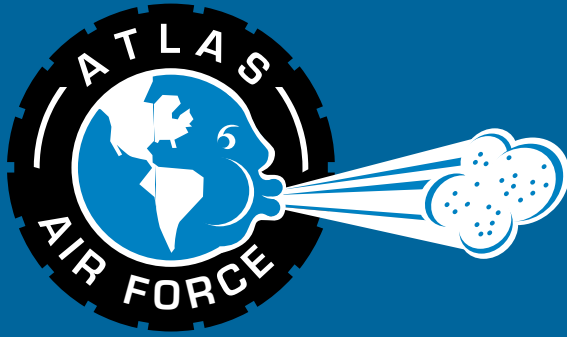

ATLAS AIR FORCE QUALITY AIR COMPRESSORS

DESIGNED WITH THE
PROFESSIONAL SHOP IN MIND.



AIR SPECIALTY TOOLS



DYBNZ1K NITRO SERIES NitroZip Surface Preparation Tool Kit

- Dynabrade Nitro Series NitroZip tool outperforms conventional spiral-wound wheels without clogging
- Excellent power for effectively removing seam sealer and paint
- Tool duplicates sand-blasting effect without surface fatigue
- Excellent for removing two-sided adhesive molding tape and decal material with use of rubber eraser wheel
- Eraser wheel has serrations for improved cooling effect air flow
- Also resists heatbuildup and reduces jumping and vibration
- Kit includes: Standard Tool, 1/2" Wheel Hub Assembly, 1/2" Coarse Wire Wheel, 3/4" Wheel Hub Assembly, 3/4" Coarse Wire Wheel and RED-TRED® Zip Eraser Wheel

DYBNZ1 NITRO SERIES NitroZip Surface Preparation - Tool ONLY



AST232 ONYX PinStripe Removal Kit

- Specialty tool developed for the removal of pinstripes, adhesives, double faced tapes and moldings with ASTRO'S Smart Eraser® Pads
- 12 piece Smart Eraser Pads - 4" pads made of molded rubber with 5/16" arbor
- Fast and easy • Patented

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



IRT324 PinStripe Remover Tool with 12 Eraser Pads

- 3700 rpm max free speed
- Rear exhaust
- Arbor 5/16" - 24 with 4" pad diameter



IRT324-1 Pin Stripe Removal Tool with 1 Eraser Pad



CPT873K Tire Buffer Kit with Slip Chuck

- Low speed tire buffer
- Quick change slip chuck for fast and easy change of buffing wheel
- Built-in regulator
- Lock off throttle to prevent accidental start ups
- Rear exhaust directs air away from the work area
- Ideal for patchwork, roughing areas for recapping and cleaning tire moldings
- Free speed RPM - 2,800



KT189007 Low Speed Tire Buffer

- Tire buffer with exhaust tube to direct air away from the working area. Inlet threaded 1/4" NPT (F).
- 2500 RPM low speed is ideal for abrasive job requiring low speed such as tire buffering
- Safety lever to prevent accidental start up
- Non-slip rubber boot to prevent the worker's hand from being frozen while buffer is loading and causing the air condition effect
- Quick and fast change of buffing wheels or carbide cutters



AMN79600 Low Speed Air Buffer

- 2800 RPM Max
- Quick Change Slip Chuck
- Throttle with Safety Lever
- Whip Hose with Exhaust Muffler



AIR SPECIALTY TOOLS



KT189110A

Air Hydraulic Rivet Gun 3/16"

- Blind Rivet Setting Capacity: 3/16" (4.8mm), 5/32" (4mm), 1/8" (3.2mm), 3/32" (2.4mm)
- Air Inlet: 1/4" NPT; Hose Size: 3/8" (10mm) ID; Traction Power: 1940 lbs; Stroke Length: 0.551" (14mm); Recommended Air Pressure: 90 PSI
- Performs well at any angle
- Powerful durable, high speed production tool
- Low vibration and low noise level
- Covered by a 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT189115A

Air Hydraulic Rivet Gun 1/4"

- Blind Rivet Setting Capacity: 1/4" (6.4mm), 7/32" (5.6mm), 3/16" (4.8mm), 5/32" (4mm), 1/8" (3.2mm), 3/32" (2.4mm)
- Air Inlet: 1/4" NPT; Hose Size: 3/8" ID; Traction Power: 3055 lbs; Stroke Length: 0.551" (14mm); Recommended Air Pressure: 90 PSI
- Quick release air valve permits cylinder to return quickly for high speed assembly operations: Prevents overloading for long life
- Powerful durable, high speed production tool
- Performs well at any angle • Covered by a 1 Year warranty



KT189105

K-Tool 3/4 HP HD Rivet Shaver Kit

- 3/4 HP
- Free Speed: 18,000 rpm
- Air Consumption: 5CFM, Air Inlet: 1/4", Air Pressure: 90psi
- Set includes Cutter Skirts: 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 3/4", Shave Bits: 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 3/4"
- Overall Length: 8-7/16" • Covered by a 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ASTPR14

Air Riveter 1/4" Capacity

- Includes the following nosepieces: 1/4", 3/16", 5/32", 1/8", 3/32"
- Performs well at any angle
- Gets into hard-to-reach places
- Provides quick, quiet and comfortable operation preventing user fatigue
- Overall length: 10-7/8" Net weight: 3-1/2" lbs. Stroke: 15mm Motor: 1/2 HP Air inlet thread: 1/4" NPT Air hose I.D. size: 3/8" Average air consumption: 2.320 liter/stroke Air pressure: 90-120 psi



KT189218

Air Shear Cutter

- Cut up to 180" per minute
- 18 gauge capacity • 360° head rotation
- Pistol grip • Through handle exhaust
- Hardened planetary gear system
- Variable speed control • Full ball bearing construction

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MALTSHD1

TurboShear Heavy Duty™

Automotive Shears Drill Attachment

- Use with minimum 14.4 volt 3/8" (9.53 mm) Cordless or Coded Drill
- Cuts straight and to the left including round and square auto body patches
- Telescoping drill clamp
- Wide-opening jaws also navigate thick plastic bumper profiles, rocker panels and layered metal



MALDHT1

Turbo-X-Tools

Hemming Drill Attachment

- Hem door skins with speed and precision
- Attaches to standard corded or cordless drill
- Will not mar or scratch door skin finish
- Resistant to solvents • Safe, controlled operation



IRT7802SA

Ingersoll Rand Heavy Duty Air Shear

- Cuts squares, angles, and circles
- Long-life tool with heavy duty cutting blades
- Shears most types of plastics and all types of aluminum, tin, and steel
- Heavy duty performance rating • 4,200 strokes per minute



AIR BLOW GUNS



DENDF-BG602

Mini Blow Gun, Rubber Tip

- Perfect air tool for removing loose materials from crevasses and tight spaces
- Rubber tip provides a concentrated stream of air
- Includes carabiner for hooking onto a belt loop
- Small enough to fit in a pocket and carry around all day
- Easy one button thumb operation



DENDF-BG601

Mini Blow Gun, Venturi Tip

- Venturi Tip speeds up the main air flow by drawing ambient air from the side ports increasing velocity and volume
- Boosts the available thrust up to 250%
- Ergonomic hand-held design
- Includes carabiner for hooking onto belt loop
- Fits into pocket for quick access



ACMA680CS

1/4" NPT Typhoon® Blow Gun with High Flow Tip

- Delivers up to 34 CFM at 125PSI
- Meets or exceeds OSHA regulations
- Maximum flow for easy clean-up and blow off
- Lightweight and ergonomic at 6.2 oz.
- Variable flow trigger for controlled blow off

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



ACMA681CS

Typhoon Pro Blow Gun

- Most powerful blow gun in its class
- Tough all-metal design for hardcore users
- Chrome plated, resists chemical and solvents
- Easily manipulate air flow: variable control trigger



AMF201

Blow Gun, Rubber Tipped

- Provides leak proof seal for blowing out lines
- Rubber tip is excellent for body shops as it will not mar painted surfaces

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



VAC72-020-1050

4" Full Flow Blow Gun

- Flow is precise and easily regulated - a wide range of lengths and accessories
- High blowing force - connection in plastic to reduce the tightening torque
- Lightweight design - durable construction
- Quieter disconnection - lower noise levels
- Modern ergonomic, comfortable grip



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

VAC72-020-1150

13" Full Flow Blow Gun with Straight Tube

- Flow is precise and easily regulated
- High blowing force
- Lightweight design
- Quieter disconnection
- Modern ergonomic, comfortable grip



VAC72-020-1160

13" Full Flow Blow Gun with Bent Tube

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

VAC72-020-1250

20" Full Flow Blow Gun with Straight Tube

VAC72-020-1260

20" Full Flow Blow Gun with Bent Tube


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AST1716

Deluxe Air Blow Gun with 20" Long Angled Nozzle with 1/2" Removeable Rubber Tip

- Improved valve design makes this blow gun more convenient, faster, and easier to use for all applications
- Comfortable lever control and insulated handle
- High impact plastic body with built-in hanger slot
- Brass air inlet, air inlet thread: 1/4" NPT; air pressure: 90-120 psi; temperature range: -40 to 80° C

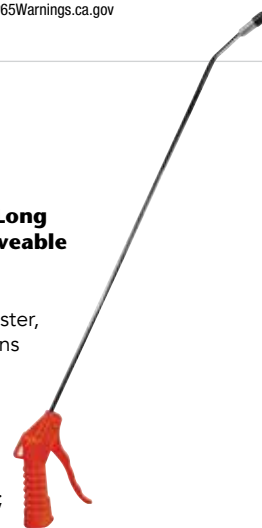

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov


AIR BLOW GUNS



AST1715

Air Blow Gun w/13" Nozzle

- New and improved valve design makes this blow gun more convenient, faster, and easier to use for all applications • Ergonomic grip
- Comfortable lever control and insulated handle
- High impact plastic body with built-in hanger slot
- Angled nozzle easily gets into tight places



AST1718

Deluxe 4" Orange Air Blow Gun

- 1/2" removeable rubber tip
- New, improved valve design makes this blow gun more convenient, faster, and easier to use for all applications • Ergonomic grip
- Comfortable lever control and insulated handle
- High impact plastic body with built in hanger slot



COITYP-2500CS

Typhoon High Flow Blow Gun, 1/4" NPT

- High Volume Tip provides 2.1 lbs of thrust
- OSHA Compliant with standard tip
- Tough die cast zinc construction
- Maximum input pressure: 150 psi
- 1/4" NPT inlet



COITYP2501CS

Typhoon Pro High Flow Blowgun, 1/4" NPT, Clamshell

- Most powerful blow gun in its class
- Tough all-metal design for hardcore users
- Chrome plated, resists chemical and solvents
- Less operator fatigue: lightweight and ergonomic
- Easily manipulate air flow: variable control trigger



CRD63050


Truckers Air Seat Blow Gun Kit

- Nylon 12' hose, coiled, burst pressure up to 120 PSI
- Zinc alloy blow gun, includes 2 replacement nozzle/heads with brass fittings
- 1/4" NTA air line tee • Meets DOT Standards
- SAE approved



Safety Extensions Blo-Gun

- OSHA approved multi-function blo-gun comes with both a safety nozzle and rubber tip nozzle
- Extension is bent to access hard to reach areas such as motors, machinery, transmissions, combines and hidden areas
- Maximum working pressure: 150 PSI
- OSHA compliant with safety tip only



MIL159 - 4'

MIL158 - 2'

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS148

Compact Safety Lever Blo-Gun

- Compact and versatile blo-gun comes with both a safety nozzle and rubber tip nozzle
- Zinc die-cast body • 1/4" NPT inlet
- Maximum working pressure: 150 PSI
- OSHA compliant with safety tip only



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS150

Full Flow OSHA Lever Blow Gun

- Maximum working pressure: 150 PSI
- SCFM 10.0 @100 PSI
- 1/4" NPT air inlet, nozzle thread size: 7/16" - 27
- Body outlet thread size: 1/2" - 27 • OSHA compliant



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS153

Rubber Tip Blow Gun

- For positive leak-proof connection when blowing out any fluid lines
- A must where metal tip could mar delicate finish in molds or fresh paint
- 1/4" NPT air inlet, with rubber tip




WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS154

Lever Rubber Tip Blow Gun with Bent Tip

- 1/4" NPT Air inlet • Rubber tip
- 45° bent tube is ideal for automatic transmissions



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MILS157

Siphon Spray Blo-Gun Kit

- Siphon Spray Blo-Gun Kit
- 1/4" NPT Air Inlet
- Complete with 8' of tubing and vinyl storage pouch
- SCFM 13.7 @ 100 PSI



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR TOOLS & accessories

AIR TOOL LUBRICANTS/OILERS



BLP16-404ATC-EA

Air Tool Oil and Conditioner - 12 oz.

- A fast and easy way to clean, coat and lubricate the internal parts of all air operated tools

BLP16-404ATC

Air Tool Oil and Conditioner 11 oz. (12 Per Case)



IRT10Z4

4 oz. Air Tool Oil

- Prevents rust formation
- Provides positive lubrication
- Dissolves gum and sludge that cut down tool speed and reduce power output

IRT105-1LB

Impact Tool Grease - 1lb.

IRT105-4T

Impact Tool Grease - 4 oz. Tube



AMF1220-1

Air Tool Oil, Pint

- Light pneumatic tool oil
- 92 SUS at 75° F



AIR FITTINGS



KTI71035

T-Style Auto Plug 1/4" Male NPT with Chrome Finish

- Auto plug • 1/4" male NPT • Etched with 1/4" IM



AMFCP1

1/4" NPT Male Auto Standard Series Type "C" Coupler

- Plated steel couplers have hardened steel balls and stainless steel springs • Max. working pressure 300 PSI
- Heat treated to reduce wear on critical mating surfaces
- Couplers interchange with Tru-Flate 10 and 100 type series as well as units produced by other manufacturers



MIL1815

1/2" NPT Female G-Style Coupler

- 1/2" female national pipe thread
- Maximum inlet pressure of 300 PSI • Buna-N seal
- Air flow of 99 standard cubic feet per minute
- Maximum temperature of 250 degrees Fahrenheit



PRVESI0712015

Prevost prevoS1 3/8" High Flow 3/8" FNPT Safety Coupler

- 3/8" High Flow Interchange
- Operating pressure: 29 to 174 psi
- Flow rate at 6 bar: 64 cfm (?p = 8.70 psi)
- ID Passage: 3/8" body size
- Temperature: +5°F to +158°F



LEGRP900375

Flexzilla Pro Air Hose Reusable Fitting, 3/8" Barb, 1/4" MNPT

- Made of heavy duty aircraft aluminum
- Spiral bend restrictor - Increases hose flexibility
- Anodized for corrosion resistance • Lightweight
- Allows Flexzilla® to be repaired with a knife and 2 wrenches



AIR FITTINGS



Professional Duty Reusable Brass Fittings for BluBird® Air Hoses

- Heavy duty brass construction - resists corrosion, ductility to high temperatures & low magnetic permeability
- 1/4" and 3/8" FastFix® fittings have 1/4" NPT ends
- Easy installation • Working pressure: 300 PSI
- Covered by a 6 month warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FastFix® Air Hose Assembly Repair Swivel

Part #	Description	
BLBFFSW14	1/4"	1/4" NPT ends
BLBFFSW38	3/8"	1/4" NPT ends



FastFix® Air Hose Assembly Repair Splicers

Part #	Description	
BLBFFSP14	1/4"	1/4" NPT ends
BLBFFSP38	3/8"	1/4" NPT ends



FastFix® Air Hose Assembly Repair Fittings

Part #	Description	
BLBFFFX14	1/4"	1/4" NPT ends
BLBFFFX38	3/8"	1/4" NPT ends
BLBFFFX12	1/2"	1/2" MNPT



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

V-Style Coupler and Plug Kits

- Scratch resistant steel design in an anodized coating
- Provides up to 70% more airflow for optimal power to your air tools and applications



MILS-303VKIT
3 Piece Coupler and Plug Kit
• Includes 1 male plug, 1 female plug and 1 female coupler



MILS-307VKIT
7 Piece Coupler/Plug Kit
• Includes 3 male plugs, 2 female plugs, 1 male coupler and 1 female coupler



MILS213 5 Piece A-Style 1/4" Coupler and Plug Kit

- A-style couplers are push type
- Steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MILS642

Hose Mender, 3/8" ID Hose

- 3/8" hose inside diameter
- Barb type construction that provides a secure grip on the hose inside diameter



MILS-657

1/4" Air Hose, Swv. Connector

- 1/4" Female national pipe thread
- Maximum inlet pressure of 150 pounds per square inch
- Air flow 40 standard cubic feet per minute



Basic Size Tru-Flate Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS1803	"P Style" Coupler	Female	1/4"	3/8"	1/Pk
MILS1805	"P Style" Coupler	Female	3/8"	3/8"	1/Pk
MILS1809	"P Style" Plug	Male	1/4"	3/8"	2/Pk
MILS785	"T Style" Coupler	Female	1/4"	1/4"	1/Pk
MILS783	"T Style" Plug	Male	1/4"	1/4"	2/Pk
MILS784	"T Style" Plug	Female	1/4"	1/4"	2/Pk
MILS786	"T Style" Coupler	Male	1/4"	1/4"	2/Pk
MIL1859	"G Style" Plug	Male	3/8"	1/2"	5/Pk
MIL1816	"G Style" Coupler	Male	1/2"	1/2"	1/Pk
MILS1815	"G Style" Coupler	Female	1/2"	1/2"	1/Pk
MILS1816	"G Style" Coupler	Male	1/2"	1/2"	1/Pk
MILS1817	"G Style" Plug	Male	1/2"	1/2"	1/Pk
MILS1818	"G Style" Plug	Female	1/2"	1/2"	1/Pk



MILS782 - 1/4" Coupler Plug Kit (Includes (1) MILS783 and (1) MILS785)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

AIR FITTINGS

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size Tru-Flate Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
PRVURC061201	Coupler	Female	1/4"	1/4"	1/Pk
PRVUSC061201	Safety Coupler	Female	1/4"	1/4"	1/Pk

prevost



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size Industrial Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS1835	"H Style" Coupler	Female	3/8"	3/8"	1/Pk
MILS1839	"H Style" Plug	Male	1/4"	3/8"	2/Pk
MILS715	"M Style" Plug	Female	1/4"	1/4"	1/Pk
MILS716	"M Style" Plug	Male	1/4"	1/4"	1/Pk
MILS727	"M Style" Plug	Male	1/4"	1/4"	2/Pk
MILS-727-5	"M Style" Plug	Male	1/4"	1/4"	5/Pk
MILS728	"M Style" Plug	Female	1/4"	1/4"	2/Pk
MILS733	"M Style" Plug	Male	3/8"	1/4"	1/Pk

MILTON



MILS711 - Quick Change Coupler Assembly (Includes (1) MILS715 & (1) MILS727)

MILS211 - 5 Piece 1/4' NPTM-Style Coupler Kit (Includes (1) MILS715, (3) MILS727 and (1) MILS728)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
PRVIRC061201	Coupler	Female	1/4"	1/4"	1/Pk
PRVIRC061251	Coupler	Male	1/4"	1/4"	1/Pk
PRVIRC081202	Coupler	Female	3/8"	3/8"	1/Pk
PRVISC061201	Safety Coupler	Female	1/4"	1/4"	1/Pk
PRVISG111203	Safety Coupler	Female	1/2"	1/2"	1/Pk

prevost



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size Lincoln Style Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS790	"L Style" Coupler	Female	1/4"	1/4"	1/Pk
MILS791	"L Style" Plug	Male	1/4"	1/4"	2/Pk
MILS792	"L Style" Plug	Female	1/4"	1/4"	2/Pk

MILTON



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size ARO Style Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
LIN13329	Coupler	Female	1/4"	1/4"	1/Pk
PRVARC061201	Coupler	Female	1/4"	1/4"	1/Pk

LINCOLN

prevost



AIR FITTINGS

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Basic Size ARO Style Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS775	"A Style" Coupler	Female	1/4"	1/4"	1/Pk
MILS776	"A Style" Coupler	Male	1/4"	1/4"	2/Pk
MILS777	"A Style" Plug	Male	1/4"	1/4"	2/Pk
MILS778	"A Style" Plug	Female	1/4"	1/4"	2/Pk

MILTON



MILS213 - 5 Piece 1/4" NPTA-Style Coupler Kit (Includes one MILS775, three MILS777 and one MILS778)

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

High Flow Interchange Series Air Couplers

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
MILS-761	"V Style" Plug	Female	1/4"	1/4"	2/Pk

MILTON

Part Number	Style / Type	Thread Type	NPT Size	Basic Size	Per Package
PRVERC071201	"Euro Style" Coupler	Female	1/4"	1/4"	1/Pk
PRVERP076201	"Euro Style" Plug	Female	1/4"	3/8"	1/Pk
PRVERP076251	"Euro Style" Plug	Male	1/4"	3/8"	1/Pk

prevost



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Legacy

FLEXZILLA PRO



LEGA53458FZ - 14 Piece Flexzilla Pro High Flow Coupler and Plug Kit - 1/4" NPT

- Kit includes: (2) FNPT Coupler, (2) MNPT Coupler, (4) FNPT Plug and (6) MNPT Plug

LEGA53457FZ - 7 Piece Flexzilla Pro High Flow Coupler and Plug Kit - 1/4" NPT

- Kit includes: (1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug

LEGA53452FZ - 3 Piece Flexzilla Pro High Flow Coupler and Plug Kit - 1/4" NPT

- Kit includes: (1) FNPT Coupler, (1) FNPT Plug and (1) MNPT Plug

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AIR FITTINGS

 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MIL5760-1

Hi-Flo V-Style 1/4" MNPT Steel

- Air flow of 74 standard cubic feet per minute
- Push type sleeve release • Max. temp.: 250°F



MIL5755

1/4" NPT Female M-Style Coupler

- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F
- M-style coupler bodies are brass with brass sleeves
- Push type, steel sleeve, drag guard • Air flow: 40 SCFM
- 1 year warranty on material and workmanship



MIL783BK

1/4" Male Plug T-Style

- 1/4" male national pipe thread
- Maximum 300 pounds per square inch



MIL5600

Male Brass Hose End - 2 Pack

- Hose ID: 1/4" • Thread 1/4" NPT
- 1 year warranty on material and workmanship



MIL1818

1/2" NPT Female G-Style Plug

- Case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F • Air flow: 99 SCFM
- 1 year warranty on material and workmanship



MIL1858

1/2" NPT Female G-Style Plug

- Case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250°F • Air flow: 99 scfm
- 1 year warranty on material and workmanship



MIL1857

1/2" NPT Male G-Style Plug

- Case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250 °F • Air flow: 99 scfm
- 1 year warranty on material and workmanship



MIL1654-6

1" x .656 I.D. Brass Hole Ferrule

- Hose OD: 21/32"
- 1 year warranty on material and workmanship




MIL731

Re-Cappers F. Plug M-Style

- Maximum inlet pressure of 300 pounds PSI
- 40 standard cubic feet per minute
- Maximum temperature of 250°F



 **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov



High Flow Couplers & Plugs

- Twice The Flow – When compared to standard interchanges!
- Provides maximum Torque • Provides Maximum RPM
- Increased efficiency • Maximum pressure 300 PSI
- Easy push-to-connect couplers • 1/4 in. body

Flexzilla High Flow Coupler

- Steel / Aluminum*

LEGA53416FZ - 1/4" FNPT

LEGA53616FZ - 3/8" FNPT

LEGA53426FZ - 1/4" MNPT

* Nickel Plated Steel with Anodized Aluminum Sleeve



2 Pack Flexzilla High Flow Plugs

- Nickel Plated Steel

LEGA53430FZ-2PK - (2) 1/4" FNPT

LEGA53630FZ-2PK - (2) 3/8" FNPT

LEGA53640FZ-2PK - (2) 3/8" MNPT



LEGA53657FZ

7 Piece Flexzilla High Flow Coupler And Plug Kit - 3/8 in. NPT

- Kit includes: (1) FNPT Coupler, (1) MNPT Coupler, (2) FNPT Plug and (3) MNPT Plug



PRVURC081202

3/8" Female Automotive FNPT Coupler

- Non scratching, heavy duty, composite body
- Operating pressure : 0 to 174 psi
- Temperature : +5°F to +158°F
- Flow rate at 6 bar :69 cfm (?p = 8.70 psi)
- Lifetime warranty does not cover abuse



PRVURC061251

1/4" Automotive 1/4" MNPT Coupler

- Lifetime warranty does not cover abuse



PRVIRP066201

1/4" Female NPT Industrial Plug

- Fits IRC 061201 • Treated Steel
- Corrosion-proof treatment





Safety Coupling

INTRODUCING THE 1/2" COMPOSITE BODY COUPLING!

- Higher flow rates to power larger pneumatic tools
- One push to decompress and disconnect
- Anti-static, silicone free
- Light weight, durable & ergonomic body
- 100% scratch free composite body



AUTOMOTIVE PROFILE			INDUSTRIAL PROFILE			HIGH FLOW PROFILE		
	1/2" BODY	1/2" PLUG		1/2" BODY	1/2" PLUG		1/2" BODY	1/2" PLUG
3/8" FNPT	PRVUSI111202EB	PRVURP116202	3/8" FNPT	PRVISI111202EB	PRVIRP116202	3/8" FNPT	PRVESI111202EB	PRVERP116202
1/2" FNPT	PRVUSI111203EB	PRVURP116203	1/2" FNPT	PRVISI111203EB	PRVIRP116203	1/2" FNPT	PRVESI111203EB	PRVERP116203
3/4" FNPT	PRVUSI111204EB	PRVURP116204	3/4" FNPT	PRVISI111204EB	PRVIRP116204	3/4" FNPT	PRVESI111204EB	PRVERP116204
3/8" MNPT	PRVUSI111252EB	PRVURP116252	3/8" MNPT	PRVISI111252EB	PRVIRP116252	3/8" MNPT	PRVESI111252EB	PRVERP116252
1/2" MNPT	PRVUSI111253EB	PRVURP116253	1/2" MNPT	PRVISI111253EB	PRVIRP116253	1/2" MNPT	PRVESI111253EB	PRVERP116253
3/4" MNPT	PRVUSI111254EB	PRVURP116254	3/4" MNPT	PRVISI111254EB	PRVIRP116254	3/4" MNPT	PRVESI111254EB	PRVERP116254
3/8" BARB	PRVUSI111810EB	PRVURP116810	3/8" BARB	PRVISI111810EB	PRVIRP116810	3/8" BARB	PRVESI111810EB	PRVERP116810
1/2" BARB	PRVUSI111813EB	PRVURP116813	1/2" BARB	PRVISI111813EB	PRVIRP116813	1/2" BARB	PRVESI111813EB	PRVERP116813
5/8" BARB	PRVUSI111816EB	PRVURP116816	5/8" BARB	PRVISI111816EB	PRVIRP116816	5/8" BARB	PRVESI111816EB	PRVERP116816
3/4" BARB	PRVUSI111819EB	PRVURP116819	3/4" BARB	PRVISI111819EB	PRVIRP116819	3/4" BARB	PRVESI111819EB	PRVERP116819

FLEXAIR

Flexible air hose

INTRODUCING THE 1/2" Ø HOSE WITH 1/2" BODY COUPLING!

- Hose, coupling & plug arrives fully assembled
- Flexible and rugged enough for the toughest environments
- 100% scratch free



INDUSTRIAL PROFILE				
	1/4" Ø HOSE x 1/4" COUPLING & PLUG	3/8" Ø HOSE X 1/4" COUPLING & PLUG	1/2" Ø HOSE X 3/8" COUPLING & PLUG	1/2" Ø HOSE X 1/2" COUPLING & PLUG
25'	PRVRSTRISB1425	PRVRSTRISB3825		
35'		PRVRSTRISB3835		
50'	PRVRSTRISB1450	PRVRSTRISB3850	PRVRSTRISB1250	PRVRISEB1250
100'	PRVRSTRISB14100	PRVRSTRISB38100		
AUTOMOTIVE PROFILE				
	1/4" Ø HOSE x 1/4" COUPLING & PLUG	3/8" Ø HOSE X 1/4" COUPLING & PLUG	1/2" Ø HOSE X 3/8" COUPLING & PLUG	1/2" Ø HOSE X 1/2" COUPLING & PLUG
25'	PRVRSTRUSB1425	PRVRSTRUSB3825		
35'		PRVRSTRUSB3835		
50'	PRVRSTRUSB1450	PRVRSTRUSB3850	PRVRSTRUSB1250	PRVRUSEB1250
100'	PRVRSTRUSB14100	PRVRSTRUSB38100		
HIGH FLOW PROFILE				
	1/4" Ø HOSE x 3/8" COUPLING & PLUG	3/8" Ø HOSE X 3/8" COUPLING & PLUG	1/2" Ø HOSE X 3/8" COUPLING & PLUG	1/2" Ø HOSE X 1/2" COUPLING & PLUG
25'	PRVRSTRESB1425	PRVRSTRESB3825		
35'		PRVRSTRESB3835		
50'	PRVRSTRESB1450	PRVRSTRESB3850	PRVRSTRESB1250	PRVRESEB1250
100'	PRVRSTRESB14100	PRVRSTRESB38100		
ARO 210 PROFILE				
	1/4" Ø HOSE x 1/4" COUPLING & PLUG	3/8" Ø HOSE X 1/4" COUPLING & PLUG	1/2" Ø HOSE X 3/8" COUPLING & PLUG	1/2" Ø HOSE X 1/2" COUPLING & PLUG
25'	PRVRSTRASB1425	PRVRSTRASB3825		
35'		PRVRSTRASB3835		
50'	PRVRSTRASB1450	PRVRSTRASB3850		
100'	PRVRSTRASB14100	PRVRSTRASB38100		

AIR COMPRESSORS



2 STAGE AIR COMPRESSORS						
Part Number	HP	CFM	Voltage	Tank	Configuration	Start-Up Kit
Value Packages						
IRTC2340L5	5	14.7	230/1/60	60	Vertical	32305880
IRTC2475N7.5	7.5	24	230/1/60	80	Vertical	32305880
Premium Packages						
IRTC2475N7.5FP	7.5	24	230/1/60	80	Vertical	32305880



IRTC2340L5



IRTC2475N7.5FP



IRTC2475N7.5



IRTC2475F13GH

Two-Stage

Gas Powered Air Compressor - Honda Engine

- Durable cast iron for 100% continuous duty application
- Extended 2 year warranty when used with Ingersoll Rand's All Season Select synthetic lubricant
- Advanced safety features including low oil-level shutdown for gas engines



IRTC2475F14G

14 HP Gas Drive

Air Compressor - Kohler Engine

- 30 gallon tank
- 14HP Kohler Engine, 25 CFM @ 175 PSI
- Alternator Charging System included
- Electric ignition and pull cord operation
- Two-Year warranty on pump with purchase of IR Start up Kit



AIR COMPRESSORS



ROTARY SCREW AIR COMPRESSORS					
Part Number	HP	CFM	Max PSI	Voltage	Tank
Standard Packages					
IRTUP6-7.5-150	7.5	25	150	230/1/60	80
IRTUP6-10-150	10	34	150	230/3/60	80
IRTUP6-15C-150	15	50	150	230/3/60	80
Total Air System Packages					
IRTUP6-7.5TAS-150	7.5	25	150	230/1/60	80



IRTUP6-7.5-150



IRTCS3L3

Single Stage Electric Powered 3 HP Air Compressor

- 60 gallon vertical tank • Maximum operating pressure: 135 PSI
- 230/1/60, nominal amp draw motor: 6.5 electric
- ASME receiver size: 60
- 11.3 CFM at 90 PSI • 10.3 CFM at 135 PSI



IRT45465432

7.5 HP, 80 Gallon Two-Stage Electric Air Compressor (230V, 3 Phase, 60 Hz) (Full Package)

- 100% cast iron cylinder head with deep groove directional cooling fins
- High efficiency stainless steel valves
- Oversized industrial grade bearings for extended pump life
- High efficiency intercooler
- Cast iron v-block design ensures maximum reliability with 360° cooling

AIR COMPRESSORS



EMXIS07V080Y1 7.5 HP, 80 Gallon

Vertical Air Compressor

- Whisper100 noise suppression system, dissipates noise up to 25%
- Aftercooler system
- Low RPM Two stage pumps
- 80 Gallon ASME Tank
- 7.5 HP, 2 Stage, Single Phase

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



EMXIS05V080Y1

5HP, 80 Gallon, Vertical Air Compressor

- Whisper100 noise suppression system, dissipates noise up to 25%
- Aftercooler system
- Low RPM Two stage pumps
- 80 Gallon ASME Tank
- 5 HP, 2 Stage, Single Phase

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



EMXHP02P02055

Hulk by EMAX 2 HP Silent Air Portable Air Compressor - 20 Gallon

- 41 dB @ 3 FT
- Low RPM motor with solid copper windings
- 2 cylinder commercial grade pump, faster recovery time, more CFM production Oil Free, allows for use in cold weather, no oil in lines, no oil maintenance
- Oil free, allows for use in cold weather, no oil in lines, no oil maintenance
- Stainless steel transfer tubes

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CHCHGR7-3K

13 Horsepower Kohler Two Stage Reciprocating Air Compressor

- Kohler Electric Start engine and two stage, single acting compressor pump
- 30 gallon horizontal tank
- Includes vibration isolators
- Splash lubricated two stage pump (R-15)
- 5 year compressor pump warranty

MOTOR GUARD

Compressed Air Filters, Sub-Micronic

- Using this unique method of filtration creates a labyrinth of sub-micronic openings from the interlocking fibers on the fabric surfaces, entrapping particles as small as .01 microns

JLMM30

Compressed Air Filter, Sub-Micronic - 45 CFM

- Max. flow @80 PSI: 45 CFM
- Max. pressure: 125 PSI
- Pipe Size: 1/4" NPT



JLMM60

Compressed Air Filter, Sub-Micronic - 100 CFM

- Max. flow @80 PSI: 100 CFM
- Max. pressure: 125 PSI



JLMM100

Compressed Air Filter, Sub Micronic Kit

- Contains a M-60 with 2 spare M-723 elements
- Contaminant free air with higher flow rates and minimal pressure drops
- Max. flow @80 PSI: 100 cfm
- Max. pressure: 125 PSI



JLMM45

Air Filter Kit M30 & 2

- M45I Air Filter Kit M30 and 2
- 1 yr warranty on material and workmanship
- If you have any questions about product details or shipping times please feel free to call BulkTP customer service at 888-645-4225. M-F 9-5 EST



AIR COMPRESSORS

FLEXZILLA



LECFXS07V080V1 7.5HP, 80 Gallon, 1 Phase, Vertical Air Compressor

- Flexzilla Pro Air Quiet Vertical Air Compressor
- 7.5 Horse Power • 2 Stage

Let's face it, standard air compressors are LOUD. All this NOISE interferes with workplace communication, lowers productivity on the job, and increases risk of hearing loss. Fortunately, Flexzilla® brings quiet back to the workplace.



LECFXS10V080V1 10HP, 80 Gallon, 1 Phase, Vertical Air Compressor

- Flexzilla Pro Air Quiet Vertical Air Compressor
- 10 Horse Power • 80 Gallon
- 1 Phase • 2 Stage
- Call vendor for warranty



TMRT19800 Water Separator and Lubricator Bolts On Machine,: Flow Rating - 20; 250 Max PSI

- Bolts On Machine: Flow Rating - 20
- 250 Max PSI; 150 Max Temp
- 25 Microns • Manual Drain
- Port - 1/4" NPT; 8-1/2" x 2"



KT189021 1-Gallon, 3HP Oil Free Pancake Air Compressor

- Induction motor
- 1/3 HP
- Maximum pressure: 100 PSI
- 120 Volt / 60 Hz, 3 Amp
- 1 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT189023 3-Gallon, 3HP Oil Free Horizontal Air Compressor

- Induction motor
- 3 Horsepower
- Maximum pressure: 100 PSI
- 120 Volt / 60 Hz, 3 Amp
- 1 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MTMAM1-PH65-08M 8 Gallon Gas Air Compressor

- 13.9 CFM @ 90 PSI • 196cc Honda OHV
- Single stage cast iron pump
- Pneumatic engine idle control
- Call vendor for warranty



The Mi-T-M 8-gallon single stage gasoline air compressor supplies more power than what a standard tool can deliver and is the ideal air compressor for construction applications.

AIR COMPRESSORS

BelAir
COMPRESSORS



IMC318VN

5 HP 80 Gallon

Vertical Two Stage Electric Reciprocating Air Compressor

- Start-Stop pressure switch control
- 18.5 cfm @100 PSI
- Tank drain and discharge valve
- 208-230 volt, single phase
- ASME safety valves fully enclosed belt guard
- 2 year full warranty



5 HP Vertical Two Stage Electric Air Compressor

- 208-230 volt single phase
- Start-stop pressure switch control
- ASME safety valves fully-enclosed belt guard
- Tank drain and discharge valve
- 2 year full warranty
- 15.3 cfm @100 PSI

IMC216V - 60 Gallon

IMC218V - 80 Gallon



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IMC318VL

7.5 HP 80 Gallon

Vertical Two Stage Electric Air Compressor

- Start-Stop pressure switch control
- 25.3 cfm @ 100 PSI
- ASME safety valves fully-enclosed belt guard
- Tank drain and discharge valve
- 208-230 volt, single phase
- 2 year full warranty



BelAir
COMPRESSORS



IMC3G3HHL

13 HP Honda Two Stage Engine Powered Compressor

- 12 volt electric and recoil start
- Unique E-Z pull tank drain
- 12 volt charging system
- Shipping weight: 369 lbs.
- 25.25 cfm @ 175 PSI
- Fully enclosed belt guard
- 44-1/2" L x 19" D x 45" H
- 2 year warranty

Engine slowdown, ASME safety valves, tank discharge valve, start key/panel, oil monitor, and a 30 gallon horizontal ASME tank.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IMC3G3HKL

14 HP Two Stage Engine-Powered Reciprocating Air Compressor

- T39 pump has a solid cast iron cylinder
- 12 volt electric and recoil start
- Battery Charging system
- 100% factory tested at full pressure
- Dimensions: 44-1/2" L x 19" W x 45" H
- 2 year "bumper-to-bumper" warranty!
- 14 HP Kohler Engine
- 25.25 ACFM at 100 PSI
- Shipped "wet" ready for use



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

IMC5020P

2 HP 20 Gallon

115 Volt Single Phase Portable Compressor

- 8.31 ACFM @ 40 PSI;
- 7.1 ACFM @ 100 PSI;
- 130 PSI maximum pressure
- Cast iron cylinder and stainless steel valves
- Comes with a regulator and 1/4" outlet
- Shipping weight: 165 lbs.
- 34-1/2" L x 19-1/4" D x 31-1/2" H



AIR COMPRESSORS



ATEATAF10PLUS-1PH-FPD Air Force AF10 Plus 10 HP Two Stage Single (Prepaid Freight)

- Mounted Magnetic Starter
- Auto Tank Drain
- Air Cooled Aftercooler
- Auto Low Oil Shut Off
- Heavy Duty Metal Belt Guard



The "PLUS" features for our commercial grade two stage air compressors includes an automatic low oil monitor, automatic tank drain, and air cooled aftercooler. These three feature help to extend the life of your Atlas® air compressor while also delivering "better air".

The Atlas® Air Force AF-10 Plus is a 1-phase 220 volt 10-HP. air compressor designed for the service center that demands a lot of air! The AF-10 Plus has a 120 gallon ASME certified storage tank. The heavy duty extra large three cylinder two stage pump delivers over 36.3 CFM @ 175 PSI.



ATEATAF3-FPD Atlas® Air Force AF3 Single Stage Single Phase 60 (Freight Prepaid)

- FREE set of Vibro-Isolation pads
- Extremely quiet operation
- Finned tank inlet tube to reduce temperature of compressor air
- Slow RPM • Heavy duty metal belt guard

This 220 volt single stage vertical air compressor is the perfect compressor for the one or two man automotive service center. The Atlas® AF3 60 gallon air compressor will duplicate the performances of the Atlas® AF1 and Atlas® AF2 while providing three times the initial air reserve. (60 gallon tank)

The no-load recovery time (90 LB. to 135 LB.) is about 3 minutes and 30 seconds. These results are consistent with the larger capacity tank.



ATEATAF10PLUS-3PH-FPD Air Force AF10 Plus 10 HP Two Stage Single (Prepaid Freight)

- Mounted Magnetic Starter
- Auto Tank Drain
- Air Cooled Aftercooler
- Auto Low Oil Shut Off
- Heavy Duty Metal Belt Guard



The "PLUS" features for our commercial grade two stage air compressors includes an automatic low oil monitor, automatic tank drain, and air cooled aftercooler. These three feature help to extend the life of your Atlas® air compressor while also delivering "better air".

The Atlas® Air Force AF-10 Plus is a 1-phase 220 volt 10-HP. air compressor designed for the service center that demands a lot of air! The AF-10 Plus has a 120 gallon ASME certified storage tank. The heavy duty extra large three cylinder two stage pump delivers over 36.3 CFM @ 175 PSI.

AIR COMPRESSORS



ATEATAF4-FPD

Atlas® Air Force AF4 Single Stage Single Phase 60 (Freight Prepaid)

- FREE set of Vibro-Isolation pads
- Extremely quiet operation
- Finned tank inlet tube to reduce temperature of compressor air
- Slow RPM • Heavy duty metal belt guard



ATEATAF5-FPD

Atlas® Air Force AF5 Single Stage Single Phase 60 (Prepaid Freight)

- FREE set of Vibro-Isolation pads
- Extremely quiet operation
- Finned tank inlet tube to reduce temperature of compressor air
- Slow RPM • Heavy duty metal belt guard



ATEATAF6-FPD

Atlas® Two Stage, 5 HP/220-Volt Single Phase Air Compressor (Freight Prepaid)

- 1 yr warranty on material and workmanship
- Vibro-isolation pads
- Delivered CFM: 150 (100 PSI) / 140 (175 PSI)
- Quiet operation
- Shipping weight: 485 lb



ATEATAF7-FPD

Atlas® Two Stage, 5 HP/220-Volt Single Phase Air Compressor (Freight Prepaid)

- Set of Vibro-Isolation pads
- Hands free tank drain extension
- Compressor oil drain extension tube
- Finned tank inlet tube for reduced tank water accumulation • Slow RPM



This is our entry level commercial grade two stage vertical air compressor. This unit operates between 140 LB. and 175 LB. PSI. The Atlas® AF6 will run our SBC 420 sandblast cabinet (when used with #8 or #10 glass beads). The combination of the commercial grade low RPM motor and heavy duty 3 cylinder (2 cylinders are low pressure and one cylinder is high pressure) cast iron reciprocating air compressor pump delivers an incredible amount of air volume and air pressure for a very low price.

ATEATAF8-FPD

Atlas® Air Force AF8 Two Stage 5 HP Commercial (Freight Prepaid)

- Free set of Vibro-Isolation pads
- Mounted Magnetic Starter
- Extremely quiet
- Finned tank inlet tube to reduce temperature of compressor air
- Heavy Duty Metal Belt Guard

The Atlas® AF8 is what we recommend for a small business that depends on their air compressor to deliver flawlessly every day.



ATEATAF8PLUS-FPD

Atlas® Air Force AF8Plus Two Stage 5 HP Commercial (Freight Prepaid)

- 1725 RPM Motor
- Extremely Quiet
- Mounted Magnetic Starter
- Auto Low Oil Shut Off
- Heavy Duty Metal Belt Guard

The "PLUS" features for our commercial grade two stage air compressors includes an automatic low oil monitor, automatic tank drain, and air cooled aftercooler. These three features help to extend the life of your Atlas® air compressor while also delivering "better air".



AIR COMPRESSORS



ATEATAF9-17-FPD Atlas® Two Stage, Single Phase, 1725 RPM Motor Air Compressor (Prepaid Freight)

- Vibro-isolation pads
- Delivered CFM: 248 (100 PSI) / 228 (175 PSI) • Magnetic Starter
- Shipping weight: 627 lb
- 1 yr warranty on material and workmanship



The Atlas® Air Force air compressors are powerful, belt driven reciprocating air compressors designed and built to offer years of trouble-free service.



ATEATAF9PLUS-17-FPD Two Stage, 7.5HP 80 Gallon Vertical Air Compressor (Prepaid Freight)

- Extremely Quite 1725 RPM Motor
- Mounted Magnetic Starter
- Automatic Low Oil Shut Off Monitor
- Automatic Tank Drain
- Finned Tank Inlet Tube To Reduce Temperature Of Compressor Air



Most shops do not have 3 phase electricity, and those that do, may not have the 3 phase outlets near where the compressor needs to be located. The Atlas® AF9Plus/17 is capable of providing adequate air for the medium to large shop owner.



ATEATAF9PLUS-17-120G-H-FPD Two Stage, 7.5HP 120 Gallon Horizontal Tank Air Compressor w/Plus Pkg (Prepaid Freight)

- Automatic Low Oil Shut Off Monitor
- Extremely Quite 1725 RPM Motor • Mounted Magnetic Starter
- Finned Tank Inlet Tube To Reduce Temperature Of Compressor Air
- Automatic Tank Drain

The "PLUS" features for our commercial grade two stage air compressors includes an automatic low oil monitor, automatic tank drain, and air cooled aftercooler. These three feature help to extend the life of your Atlas® air compressor while also delivering "better air".



ATEATAF9-17-120G-H-FPD Two Stage, 7.5HP 120 Gallon Horizontal Tank Air Compressor (Prepaid Freight)

- Free Set of Vibro-Isolation Pads Included
- Heavy Duty Metal Belt Guard
- Adjustable Pressure Switch
- Mounted Magnetic Starter
- Extremely Quite 1725 RPM Motor



The 120 gallon tank provides 33% more storage capacity than the 80 gallon tank for those shops that consume a large volume of air at one time. The horizontal tank allows the air compressor to be located on an overhead storage area.



ATEATAF1-FPD 5HP Peak/ 2HP Running 20 Gallon Horizontal Portable Air Compressor (Prepaid Freight)

- Heavy Duty Metal Belt Guard
- Quiet Operation • 110 Volt Electric
- Quick Coupler Included For Easy Air Hose Installation
- Adjustable Air Regulator



HOSES



BluBird®

BluBird® Air Hoses

- 40% lighter than other rubber hoses & as light as hybrids
- Designed to offer the best of both worlds - the exceptional cold-weather flexibility, durability and premium feel of high-end rubber hoses and the light-weight comfort of premium hybrid hoses
- Ultra light, super-strong rubber - resists abrasion and kinks
- Extreme ozone resistance provides protection from extreme weather
- Flexibility in extreme conditions from -50°F to 190°F
- Constructed with high strength polyester braided reinforcement
- 4 finger grip bend restrictor for better ergonomics
- Available hose inner diameters: 1/4", 3/8", 1/2" and 3/4"
- Max. working pressure: 300 PSI • 4:1 Safety factor
- 10 year warranty

Part #	Description	NPT
BLBBB14100	1/4" x 100'	1/4"
BLBBB1425	1/4" x 25'	1/4"
BLBBB1450	1/4" x 50'	1/4"
BLBBB3810	3/8" x 10'	1/4"
BLBBB38100	3/8" x 100'	1/4"
BLBBB3815	3/8" x 15'	1/4"
BLBBB3825	3/8" x 25'	1/4"
BLBBB3835	3/8" x 35'	1/4"
BLBBB3850	3/8" x 50'	1/4"
BLBBB1210	1/2" x 10'	1/4"
BLBBB12100	1/2" x 100'	1/2" to 3/8" NPT Reducer
BLBBB1215	1/2" x 15'	1/4"
BLBBB1225	1/2" x 25'	1/2" to 3/8" NPT Reducer
BLBBB1250	1/2" x 50'	1/2" to 3/8" NPT Reducer
BLBBB3415	3/4" x 15'	
BLBBB3425	3/4" x 25'	

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Oil Shield®

Oil Shield® Next-Gen Rubber Air Hoses

- The Lightest Class A Oil Resistant Hose
- Ultra light, super-strong rubber
- RMA Class A oil resistant core tube and cover
- Constructed with high strength polyester braided reinforcement
- Flexibility in extreme conditions from -30°F to 180°F
- 4 finger grip bend restrictor for better ergonomics
- Available hose inner diameters: 1/4", 3/8", 3/4" and 1/2"
- Max. working pressure: 300 PSI • 4:1 Safety factor
- 3 year warranty

Part #	Description	NPT	
BLBOS3810	3/8" x 10'	1/4"	
BLBOS3815	3/8" x 15'	1/4"	
BLBOS3825	3/8" x 25'	1/4"	
BLBOS3835	3/8" x 35'	1/4"	
BLBOS3850	3/8" x 50'	1/4"	
BLBOS38100	3/8" x 100'	1/4"	
BLBOS1225	1/2" x 25'	1/2"	Includes 1/2" to 3/8" NPT Reducer
BLBOS1250	1/2" x 50'	1/2"	Includes 1/2" to 3/8" NPT Reducer
BLBOS12100	1/2" x 100'	1/2"	Includes 1/2" to 3/8" NPT Reducer

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSES



Avagard® Professional Rubber Air Hoses

- 80% the weight of traditional red rubber hoses
- Ozone resistant cover provides protection from extreme weather, abrasions & kinks
- Resists mild grease, oil & diesel
- Constructed with high strength polyester braided reinforcement
- Flexibility in extreme conditions from -40°F to 190°F
- 4 finger grip bend restrictor for better ergonomics
- Available hose inner diameters: 1/4", 3/8" and 1/2"
- Max. working pressure: 300 PSI • Safety factor: 4:1

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part #	Description	NPT
BLBAVG1410	AvaGard 1/4" x 10' Air Hose, Red	1/4"
BLBAVG1415	AvaGard 1/4" x 15' Air Hose, Red	1/4"
BLBAVG1425	AvaGard 1/4" x 25' Air Hose, Red	1/4"
BLBAVG1450	AvaGard 1/4" x 50' Air Hose, Red	1/4"
BLBAVG14100	AvaGard 1/4" x 100' Air Hose, Red	1/4"
BLBAVG3810	AvaGard 3/8" x 10' Air Hose, Red	1/4"
BLBAVG3815	AvaGard 3/8" x 15' Air Hose, Red	1/4"
BLBAVG38100	AvaGard 3/8" x 100' Air Hose, Red	1/4"
BLBAVG1210	AvaGard 1/2" x 10' Air Hose, Red	1/2"
BLBAVG1215	AvaGard 1/2" x 15' Air Hose, Red	1/2"
BLBAVG1225	AvaGard 1/2" x 25' Air Hose, Red	1/2"
BLBAVG1250	AvaGard 1/2" x 50' Air Hose, Red	1/2"
BLBAVG12100	AvaGard 1/2" x 100' Air Hose, Red	1/2"
BLBAVG3415	AvaGard 3/4" x 15' Air Hose, Red	3/4"
BLBAVG3425	AvaGard 3/4" x 25' Air Hose, Red	3/4"
BLBAVG3450	AvaGard 3/4" x 50' Air Hose, Red	3/4"



Flexibility in extreme conditions from -40°F to 190°F

The Pinnacle of RED RUBBER HOSES

ULTIMATE DURABILITY

STAYS FLEXIBLE IN EXTREME COLD WEATHER! -40°F to 190°F

5 Year Warranty

EOR Extreme Ozone Resistance

UA Ultimate Agility at 80% the weight

R Resists Mild Grease, Oil & Diesel

HOSES



Flexibility in extreme conditions from 5°F to 140°F



Flexair Hoses with Safety Coupling and Plug

- Flexible hose assembly
- Comes with Prevost coupling and plug
- Hose rated to 300 PSI working pressure
- Temperature range 5°F to 140°F
- Paired with the prevoS1 safety coupling, which is ISO 4414 compliant, and protective rubber guard around the clamps to eliminate scratches

Part #	Size/Color/Coupling
PRVRSTRESB3835	3/8" ID X 35' - Green/High Flow
PRVRSTRESB3825	3/8" ID X 35' - Green/High Flow
PRVRSTRESB1450	1/4" ID X 50' - Green/High Flow
PRVRSTRESB1425	1/4" ID X 25' - Green/High Flow
PRVRSTRASB3835	3/8" ID X 35' - Yellow/ARO 210
PRVRSTRASB3825	3/8" ID X 25' - Yellow/ARO 210
PRVRSTRASB1450	1/4" ID X 50' - Yellow/ARO 210
PRVRSTRASB1425	1/4" ID X 25' - Yellow/ARO 210
PRVRSTRUSB3835	3/8" ID X 35' - Red/Automotive
PRVRSTRUSB3825	3/8" ID X 25' - Red/Automotive
PRVRSTRUSB1450	1/4" ID X 50' - Red/Automotive
PRVRSTRUSB1425	1/4" ID X 25' - Red/Automotive
PRVRSTRISB3825	3/8" ID x 25' - Blue/Industrial
PRVRSTRISB1425	1/4" ID x 25' - Blue/Industrial



Flexzilla® ZillaGreen Air Hose

- Extreme all weather flexibility, even in sub zero temperatures! (-40° to 150° F)
- Kink resistant under pressure
- No memory, lays flat
- Excellent abrasion-resistant outer cover
- Includes bend restrictors that reduce wear and tear
- Maximum working pressure: 300 PSI
- Engineered polymer-blend material permits use in environments where general purpose PVC and rubber hoses may become stiff



LEGHFZ12100YW3 - 1/2" x 100' **LEGHFZ3850YW2** - 3/8" x 50'

Part Number Rubber Hoses	Hose Color	Hose Material	Hose Diameter	Length	NPT	Working Pressure	Burst Pressure	Additional Features
LEGHFZ12100YW3	"ZillaGreen"	Hybrid Polymer	1/2"	100'	3/8"	300 PSI	1,200 PSI	Bend Restrictors

HOSES



BLBBBJH3450

**BluBird® Pro Jack Hammer Hose
3/4" x 50' with Stainless Steel Ends**

- Ultra-light & super-strong rubber
- Ozone resistant cover provides protection from extreme weather, abrasions & kink
- Flexibility in extreme conditions from -50° F to 190° F
- Factory crimped stainless steel universal claw couplings for better durability
- Wrapped finish gives better flexibility and abrasion resistance
- Covered by a 2 year warranty



Flexibility in extreme conditions from -50°F to 190°F



BLBAVGJH3450

**Avagard® Jack Hammer
HD Rubber Hose - 3/4" x 50'**

- Heavy Duty rubber hose that's 20% lighter than others conventional hoses
- Ozone & UV resistant to prevent cracking
- Cold Weather Flexibility down to -40°F
- Handles Hot Water up to 190F
- 4 Finger Grip Bend Restrictors



Handles hot water up to 190° F



Whip Hoses & Snubber Hoses



BluBird® Whip Hoses

- Professional air tool snubber hose, 300 PSI working pressure
- Extends coupler service life & improves maneuverability
- Absorbs shock to air couplers from pneumatic tools
- Reduces twisting and kinking
- Flexible rubber construction, with 4 finger-grip bend restrictor
- Covered by a 90 day material and workmanship warranty

Part #	Description	NPT
BLBBBSR3802	3/8" x 2' with 360° Ball Swivel	1/4"
BLBBBSR3803	3/8" x 3' with 360° Ball Swivel	1/4"
BLBBBSR3805	3/8" x 5' with 360° Ball Swivel	1/4"
BLBBBSR1202	1/2" x 2' with 360° Ball Swivel	1/2"
BLBBBSR1205	1/2" x 5' with 360° Ball Swivel	1/2"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Oil Shield® Whip Hoses

- Professional air tool lead in / snubber hose, 300 PSI working pressure
- Oil resistant core tube and cover meets RMA Class A oil resistance
- Absorbs shock to air couplers from pneumatic tools
- Flexible rubber construction, with 4 finger-grip bend restrictor
- Covered by a 90 day material and workmanship warranty

Part #	Description	NPT
BLBOSSR3802	3/8" x 2' with 360° Swivel	1/4"
BLBOSLD3803	3/8" x 3' Whip Hose	1/4"
BLBOSSR3805	3/8" x 5' with 360° Swivel	1/4"
BLBOSLD1203	1/2" x 2' Whip Hose	1/2"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSES

Whip Hoses & Snubber Hoses



PRVWHST038I251 Whip Hose 3/8" ID for Tool Connection

- STOFLEX whip hose assembly to increase quick coupling and hose life
- 3/8" ID X 24" Long • 1/4" MNPT each end
- 1-year Manufacturing Defects



PRVPUS266V Green Polyurethane 5/16" ID Spiral Hose Assembly

- 5/16" ID X 20' extended length
- 1/4" fixed MNPT on supply end, 1/4" rotating MNPT of tool end
- Oil and Gas resistant
- 1-year Manufacturing Defects



Swivel Whip Hoses

- Red rubber whip hose with brass ferrule
- 1/4" swivel MNPT + 1/4" fixed FNPT fittings
- 300 PSI
- Covered by a 90 day material and workmanship warranty



Part #	Description	Swivel
BLBAVGSR3803KT	3/8" x 3' Swivel Whip Hose with 360° Ball Swivel	1/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



BluBird® Lead-in Hoses

- Ultra-light & super-strong: finally, a rubber hose that's 40% lighter than others and as light as hybrid / PVC hoses
- Makes a flexible connection from rigid supply line to hose reel
- Braided, polyester gives 300PSI working pressure
- Flexibility in extreme conditions from -50°F to 190°F
- Comes with 1/4" brass MNPT end fittings
- 4 finger grip bend restrictors • Covered by a 1 year warranty



Part #	Description	NPT
BLBBBLD1203	1/2" x 3' Lead in Hose	1/2"
BLBBBLD3803	3/8" x 3' Lead in Hose	1/4"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Utility Hoses



Part #	Description	NPT
BLBAVGLD3803KT*	3/8" x 3' Air Hose, Red	1/4"
BLBAVG3825KT*	3/8" x 25' Air Hose, Red	1/4"
BLBAVG3850KT*	3/8" x 50' Air Hose, Red	1/4"
BLBAVG1250KT38*	1/2" x 50' Air Hose, Red	3/8"
BLBAVG1250KT12*	1/2" x 50' Air Hose, Red	1/2"

Red Rubber Air Hoses

- Solid brass end MNPT fittings
- Protective PVC bend restrictor ends
- Abrasion-resistant rubber outer jacket
- 300 PSI working pressure • 1 year warranty



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSE REELS



BluBird® Air Hose Reels

- Smooth auto-rewind with locking 12 point ratchet gearing system which helps to lock at various lengths
- Heavy duty steel construction with powder coated, corrosion proof finish
- Four rollers reduce hose wear
- Horizontal and vertical wall mount options with adjustable guide arm
- Flexibility in extreme conditions from -50°F to 190°F
- Can be mounted on wall, ceiling and floor
- 4:1 Safety factor
- 2 year warranty on hose reel and 10 year warranty on attached hose to any manufacturing defects



Part #	Description	NPT
BLBBBR1450	1/4" x 50' Air Hose Reel	3/8" inlet and 1/4" NPT Outlet
BLBBBR3825	3/8" x 25' Air Hose Reel	3/8" inlet and 3/8" to 1/4" NPT Reducer Outlet
BLBBBR3850	3/8" x 50' Air Hose Reel	3/8" inlet and 3/8" to 1/4" NPT Reducer Outlet
BLBBBR1250	1/2" x 50' Air Hose Reel	3/8" inlet and 1/2" to 3/8" NPT Reducer Outlet
BLBBBR1265	1/2" x 65' Air Hose Reel	3/8" inlet and 1/2" to 3/8" NPT Reducer Outlet
BLBBBLD3803RL	Replacement Lead Hose for BLBBBR3850	
BLBBB3850RL	Replacement Hose for BLBBBR3850	

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



HEAVY DUTY

BluBird® Heavy Duty 18 Gauge Steel Air Hose Reels

- Retractable hose reel with BluBird® air hose
- Powder coated steel - corrosion resistant, heavy duty 18 gauge steel
- 12 point ratchet for locking at shorter intervals
- 4-way roller guides
- 3' whip hose included
- Flexibility in extreme conditions from -50°F to 190°F
- 4:1 Safety factor
- Covered by a 2 year warranty on reel with 10 year warranty on attached hose to any manufacturing defects

Part #	Description	NPT
BLBBBRHD1250	1/2" x 50' Heavy Duty Air Hose Reel	3/8" inlet and 1/2" to 3/8" NPT Reducer Outlet
BLBBBRHD3850	3/8" x 50' Heavy Duty Air Hose Reel	3/8" inlet and 3/8" to 1/4" NPT Reducer Outlet

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HOSE REELS



BLBBBRDA3850

BluBird Heavy Duty Dual-Arm Retractable Air Hose Reel 3/8" x 50'

- ULTIMATE SOLUTION FOR A PRO! Powder Coated Steel - Corrosion Resistant, Dual Arm Heavy Duty 18 Gauge
- 12 Point Ratchet for locking at shorter intervals
- 50% Wider Spring with Rubber Gasket for extreme durability
- 3' Whip hose included along with a 3/8" to 1/4" reducer
- Perfect for mounting on mobile applications
- Reel is covered by a 2 year warranty and hose is covered by a 10 year warranty

BLBBBRDA1250

BluBird Heavy Duty Dual-Arm Retractable Air Hose Reel 1/2" x 50'



BLBOSRDA3850

Oil Shield Heavy Duty Dual-Arm Retractable Air Hose Reel 3/8" x 50'

- Powder Coated Steel - Corrosion Resistant, DUAL ARM Heavy Duty 18 Gauge Steel
- Perfect for mounting on mobile applications
- Meets RMA Class A Oil Resistance
- 12 Point Ratchet for locking at shorter intervals
- 50% Wider Spring with Rubber Gasket for extreme durability
- 3' whip hose include along with a 1/2" to 3/8" reducer
- Reel is covered by a 2 year warranty and hose is covered by a 3 year warranty



on Hoses



on Hose Reels



Flexibility in extreme conditions from -30°F to 180°F



BLBOSRDA1250

Oil Shield Heavy Duty Dual-Arm Retractable Air Hose Reel 1/2" x 50'



Flexibility in extreme conditions from -50°F to 190°F

BLBBBRSS3850

BluBird Heavy Duty Stainless Steel Retractable Air Hose Reel 3/8" x 50'

- 18 gauge stainless steel 304 construction
- Includes 3' inlet hose
- 12 point ratchet for precise resolution, adjustable outlet arm, 4 way roller guides, ceiling floor, wall mounting options
- 40% lighter, cold weather flex up to -50°F
- Covered by a 1 year warranty



HOSE REELS



Oil Shield® Air Hose Reels

- Retractable air hose reel with BluBird® Oil Shield® air hose
- Powder coated steel - corrosion resistant, heavy duty 18 gauge steel
- Flexibility in extreme conditions from -30°F to 180°F
- 12 point ratchet for locking at shorter intervals
- 4-way roller guides • 4:1 Safety factor
- Covered by a 2 year warranty on reel with 3 year warranty on the included yellow Oil Shield® hose

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part #	Description	NPT
BLBOSR3825	3/8" x 25' Oil Shield® Air Hose Reel	3/8"NPT inlet and 1/4" outlet
BLBOSR3835	3/8" x 35' Oil Shield® Air Hose Reel	3/8"NPT inlet and 1/4" outlet
BLBOSR3850*	3/8" x 50' Oil Shield® Air Hose Reel	3/8"NPT inlet and 1/4" outlet
BLBOSR3875*	3/8" x 75' Oil Shield® Air Hose Reel	3/8"NPT inlet and 1/4" outlet
BLBOSR1250*	1/2" x 50' Oil Shield Air Hose Reel	3/8"NPT inlet and 1/2" NPT with 1/2" to 3/8" Reducer outlet



Oil Shield® Heavy Duty 18 Gauge Steel Air Hose Reels

- Retractable hose reel with Oil Shield® air hose
- Powder coated steel - corrosion resistant, heavy duty 18 gauge steel
- 12 Point ratchet for locking at shorter intervals
- Flexibility in extreme conditions from -50°F to 180°F
- 4-way roller guides • 3' whip hose included • 4:1 Safety factor
- Retractable hose reel with Oil Shield® hose, 12 point ratchet, powder coated
- 2 year warranty on reel with 3 year warranty on attached hose

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part #	Description	NPT
BLBOSRHD3850	3/8" x 50' Oil Shield® Air Hose Reel	3/8" inlet with 3/8" to 1/4" NPT Reducer outlet
BLBOSRHD1250	1/2" x 50' Oil Shield® Air Hose Reel	3/8" inlet with 1/2" to 3/8" NPT Reducer outlet



BLBAVGR3850*

AVAGARD® Black Steel Hose Reel with 3/8" x 50' Rubber Air Hose

- All steel constructed with 300 PSI red 50' rubber hose
- 3/8" NPT inlet and 1/4" outlet • Slotted mounting base
- Automatic spring powered recoil
- Flexibility in extreme conditions from -40°F to 190°F
- 12 position ratchet gear locks reel at shorter hose length
- 1 year warranty on reel with 5 year warranty on attached hose

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



on Hoses



on Hose Reels



Flexibility in extreme conditions from -40°F to 190°F

HOSES

Compressor and Inflator Kits

BluBird®

BLBBB1425KIT



13 Piece BluBird® Air Compressor Kits

- Hose: 40% lighter than traditional rubber hoses, resists kinks and extreme weather, 4 finger grip bend restrictors, 300 PSI 1200 PSI
- Flexibility in extreme conditions from -50°F to 190°F
- Perfect for DIY & contractors • 4:1 Safety factor
- Heavy duty industrial type couplers & plugs in brass
- 10 year warranty on hose and 2 year warranty on accessories

Kit Includes: BluBird Air Hose, Safety Blow gun (1), Tire gauge (1), Air Chuck (1), Male Plugs Industrial style 1/4" NPT (3), Female Plugs Industrial style 1/4" NPT (2), Male Coupler Industrial style 1/4" NPT (1), Female Coupler Industrial style 1/4" NPT (1), Teflon tape (1), Storage bag (1).

BLBBB1425KIT - 1/4" x 25' **BLBBB3825KIT** - 3/8" x 25'
BLBBB3850KIT - 3/8" x 50'

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

BluBird®

FLEET EDITION STAY ON THE ROAD!



BLBBBFLT3850* BB IPA9060 Fleet Edition Kit

- Featuring the lightest, strongest, most flexible all-weather BluBird® air hose 3/8" x 50' with 1/4" MNPT
- Includes Phillips heavy duty aluminum universal glad hand
- Includes a 1/4" to 1/2" adapter for fitting to Phillips glad hand (made in USA) Teflon™ tape and a carry bag for easy storage after use
- Dual foot chuck inflator • 4:1 Safety factor
- Flexibility in extreme conditions from -50°F to 190°F
- 10 year warranty on hose and a 2 year warranty on accessories

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

K TOOL INTERNATIONAL

KTI71032

20-Piece Air Hose Accessories Kit

- Includes: (1) Dual head tire chuck, (1) Tire gauge, (1) Rubber blow gun nozzle, (1) Brass blow gun adapter, (1) 1/4" male double male connector, (1) 1/4" double female connector, (1) Blow gun safety nozzle, (1) blow gun tapered nozzle, (2) Inflation needles, (1) Blow gun head, (1) Thread seal tape, (1) 1/4" x 25 ft. air hose, (2) 1/4" industrial style quick-connect female coupler, (2) 1/4" industrial style quick-connect female plug, (3) 1/4" industrial style quick-connect male plug
- Bright yellow coiled air hose
- Thread seal tape to secure leak-free connections
- All of the most popular accessories included with this kit
- Fill many air-required products such-as tires, floats and much more

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



HOSES

Accessories

BlueBird®



BLBHR53812
Swivel Mount for Hose Reels
- 1/4" 3/8" & 1/2" Reels

- Mounting bracket allows hose reels to be mounted to the wall and swung sideways for easy use while reducing pressure on the rollers
- All steel powder coated construction
- Heavy duty swivel joints
- Suitable with most reels
- Covered by a 2 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

BlueBird®



Hose Reel Roller Guides

Part #	Description
BLBRS506	50' Blue HD Hose Reel Roller Guide Set
BLBRS508	50' Red HD Hose Reel Roller Guide Set

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT171028

Air Hose Accessory 18-Piece Kit with Thread Seal Tape

- Includes: (1) Air blow gun, (1) 10-50 PSI tire gauge, (1) Dual-foot tire chuck, (2) 1/8", 1/4" NPT female couplers, (2) 1/8", 1/4" NPT male plugs, (2) 1/8", 1/4" NPT female plugs, (2) Double female couplings, (1) Double male coupling, (2) Inflation needles, (1) Safety nozzle, (1) Tapered nozzle, (1) Thread seal tape, (1) Rubber tip
- Comes in a clear plastic storage case
- Includes all of the most popular accessories for your air hose



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

