

FLUID AND GREASE

Corded / Cordless Grease Guns

LINCOLN
®



12-Volt Lithium Ion PowerLuber Grease Gun

- Built-in LED illuminates dimly lit areas
- Integrated hose holder
- Air purge valve to prevent loss of prime
- Balanced, lightweight design
- Stable 3-point stance keeps the tool upright and within reach
- 5 Year Warranty on Tool
- 2 Year Warranty on Battery and Charger

Part #	Description
LIN1264	2 Battery Kit
LIN1262	1 Battery Kit
LIN1261	12-Volt Li-Ion Battery



20-Volt Lithium Ion PowerLuber Grease Gun

- Stable 3-point stance keeps the tool upright and within reach
- Electronically controlled two-speed motor
- LCD identifies: Empty cartridge, Loss of prime, Grease output and Blocked fitting
- 5 Year Warranty on Tool
- 2 Year Warranty on Battery and Charger

Part #	Description
LIN1884	2 Battery Kit
LIN1882	1 Battery Kit
LIN1880-NB	Bare Gun ONLY
LIN1871	12-Volt Li-Ion Battery
LIN1870	AC Charger for 12 to 20-Volt Li-Ion Battery
LIN1875A	DC Mobile Charger for 20-Volt Li-Ion Battery

LINCOLN
®



18-Volt NiCad Battery Operated PowerLuber Grease Gun

- Versatile two-speed design - high-volume and high-pressure matches the tool to the task
- Patented stroke counter for measureable grease output
- High-efficiency combination valve purges trapped air
- Dual motor protection - circuit breaker and pressure relief valve
- Outstanding performance in high-pressure applications
- 1 Year Warranty

Part #	Description
LIN1842	1 Battery Kit
LIN1800-NB	Bare Gun ONLY
LIN1801	12-Volt Li-Ion Battery
LIN1410	AC Charger for 14 to 18-Volt NiCad Battery
LIN1875A	DC Mobile Charger for 20-Volt NiCad Battery



LINAC2440 120-Volt Corded Grease Gun

- 120v motor provides the highest torque values in its class
- Variable speed trigger combines with the 2-speed transmission for excellent flow control
- High-efficiency combination valve purges trapped air
- Ergonomically designed and balanced for comfort
- Patented stroke counter for measurable grease output
- Application: heavy equipment, trucking/transport, automotive, industrial, wind energy. Includes: six foot power cord and heavy duty carrying case

LIN1401 14.4 Volt NiCd Rechargeable Battery for PowerLuber

- Works with 1410a charger
- Works with Lincoln's LIN1442 and LIN1444 cordless grease gun
- No Charger Included - battery only



FLUID AND GREASE

Corded / Cordless Grease Guns



DWTDCGG571M1

20V Max Lithium-Ion Grease Gun Kit

- 10,000 max psi to power through clogged grease fittings
- High-volume pump pushes up to 5.0 oz./min.
- Up to 16 cartridges per charge
- Variable speed trigger offers precise control of the grease flow
- 42" extra-long and flexible hose designed for reaching hard to access grease fittings

Kit includes: (1) DCB204: 20V MAX XR premium Lithium-ion battery (4.0 Ah), (1) Fast charger, (1) shoulder strap and kit box.

DWTDCGG571B

20V Max Grease Gun - Tool Only

DWTDCGG570K

18V Grease Gun Kit

- Delivers 10,000 psi @ 5.0oz/min



KT173970

Battery Powered

19.2V Cordless Grease Gun

- Includes two 1.5Ah Lithium Ion 19.2V battery packs, cUL listed 110V AC one hour quick charger, 30" high pressure grease hose and quick lock coupler
- Develops up to 6000 PSI
- Delivers up to 3 oz / minute. Dispenses up to 6 grease cartridges with a single charge
- 3 Way loading: 14 oz cartridge, bulk and suction fill
- Covered by a 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LEGL1380

Workforce 12V Cordless Grease Gun Kit with Two Ni-Cd Batteries

- Heavy duty air pocket relief valve
- Planetary gear drive
- Cartridge and bulk loading
- Plated steel barrel
- Delivers up to 7,000 PSI - it is ideal for use in the field or in the shop

FLUID AND GREASE

Corded / Cordless Grease Guns



MLW2646-22CT M18™ Cordless 2-Speed Grease Gun Kit with 2 Batteries

- Industry leading 10,000 PSI max operating pressure and max flow-rate of up to 10 oz. per minute
- M18™ REDLITHIUM™ System: Compatible with over 40 M18™ Lithium-Ion solutions for greater versatility

Includes (2) M18 batteries and the new multi-voltage charger, so you can charge all M12 and M18 lithium-ion batteries with one charger.



MLW2446-21XC M12™ Cordless Grease Gun Kit

- Delivers over 8,000 PSI for heavy duty applications
- M12™ XC LITHIUM-ION Battery Pack - 20+ Tools in the M12™ Cordless System

Includes: grease gun, (1) XC Battery, charger and carrying case.

MLW2446-20 M12™ Grease Gun (Bare Tool)



IRTLUB5130-K12 20V Cordless Grease Gun Kit

- Cordless LUB5130 makes it easy for operators to grease fittings in the shop and in the field
- Get more done in less time with the unbeatable combination of operating pressure and run-time provided by powerful motor and Lithium-ion battery technologies
- Work with greater comfort and less fatigue — lightweight 7.2 lbs. design, ergonomic handle with over-molded grip reduces vibration for extended use
- Steel-reinforced metal gears, heavy-duty motor and robust housing protect against breakage in the harshest environments and withstand repeated drops and shop fluid damage
- Kit includes: (1) LUB5130 grease gun, (1) BL2005 20 volt battery (2.5Ah), (1) BC1120 20v charger, blow-molded case


Air Grease Guns



KT173900 Air-powered, Pistol-Grip Grease Gun

- Air pressure ranges from 1,200 psi to 6,000 psi
- Uses 400cc bulk loading or standard 14 oz. cartridge
- Includes rigid and flexible extensions
- Rugged, heavy-duty steel construction
- Portable and nearly effortless to use

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT173962 Continuous Flow Grease Gun, Air Operated

- Air operated continuous flow grease gun, 14 oz / minute
- 3-way loading: 14 oz cartridge, bulk and suction fill
- Develops up to 4,800 PSI • Air inlet: 40 - 120 PSI
- Includes 6" steel extension & coupler • 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LIN1162 Fully Automatic Pneumatic Grease Gun

- 30" high-pressure hose with coupler and attachment clip
- Air operating range 40-150 psi, and has greasing capabilities of 6000 psi
- Variable-speed trigger, fully automatic, continuous operation
- Accessible check valve assembly
- Superior flow performance obtained through advanced design

This fully automatic grease gun has a variable speed trigger, which provides excellent grease flow control while the advanced pump design eliminated traditional priming issues. The grease gun gives outstanding performance and durability. The pump ratio: 40:1 at 150 psi Maximum Grease Pressure: 6,000 psi (414 bar) Air Pressure Range: 40- 150 psi (2.8 - 10.3 bar)

FLUID AND GREASE

Manual Grease Guns



KT173933 Heavy Duty Pistol Grip Grease Gun 14 oz

- Die cast aluminum head fitted with steel block nut • 5,000 PSI
- Complete with 18" flexible hose extension & coupler
- 3-way loading: 14 oz cartridge, bulk and suction fill
- 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT173942 Heavy Duty Lever Grease Gun 14 oz

- Heavy duty aluminum die cast grease gun head fitted with bulk loaded & air release
- 3-way loading: 14 oz cartridge, bulk and suction fill
- Grease gun handle fitted with rubber grip
- Develops up to 10,000 PSI with built-in variable stroke
- Supplied complete with 6" steel extension & coupler
- 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT173905 Standard Lever Grease Gun 14oz

- Standard lever grease gun 14 oz
- 6,000 PSI
- 3-Way loading 14 oz cartridge, bulk and suction fill
- Complete with 6" steel extension & coupler
- 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT173930 Mini Pistol Grease Gun 3 oz

- 3 oz mini pistol grease gun
- Dual discharge ports with pull type pistol mechanism • 3,500 PSI
- Complete with 4" steel extension & coupler
- 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LIN1013 Heavy Duty Grease Gun with 16 oz. Bulk/14.5 oz. Cartridge

- High-output setting delivers twice the grease per stroke and high-pressure setting for high-tolerance joints and bearings
- Large piston and bore, with quick adjustment handle
- Multi-port pickup makes greasing in tight areas easy
- Has a unique extension that can rotate 360° for hard-to-reach areas
- Exceeds 7000 psi pressure

LIN1133 2 Way Loading Lever Action Grease Gun with 18" Whip

- Includes 18" whip hose and coupler
- Length is 15-1/2"
- 16 oz. bulk / 14.5 oz cartridge
- Output 1 oz. per 33 strokes



LIN1134 Heavy Duty Pistol Grip Grease Gun with Whip Hose and Rigid Pipe

- Has a jamproof handle mechanism and single piece head casting
- Variable stroke design delivers both high pressure and high volume
- Filler nipple/bleeder valve combination
- Creates up to 7500 PSI
- Comfortable design and unique pivot angle may help to reduce user fatigue



LIN1142 2 Way Loading Lever Action Manual Grease Gun

- Designed for rough treatment on the job with a cast iron pump head, precision fit plunger and extra heavy follower spring
- Length: 21-3/4" • 1 oz. of grease per 33 strokes
- Jam proof toggle mechanism prevents binding or accidental bedding of plunger
- Exclusive "flip over" follower provides a superior seal for either cartridge or bulk loading applications



FLUID AND GREASE

Manual Grease Guns

LINCOLN
®



LING112

Heavy Duty Pistol Grip Grease Gun

- Die-cast head with 4" rigid pipe extension and coupler
- One-hand operation
- Uses standard 14 oz. cartridge or can be bulk filled
- Posi-lock follower rod with T-handle provides sure-handed grip and easy filling at any position
- Heavy-duty steel barrel
- Electro-static
- Corrosion-resistant finish
- Non-slip knurling



LING113

Heavy-Duty Pistol Grip Grease Gun

- Die-cast head with 4" rigid pipe extension and coupler
- Equipped with 18" flex hose extension and coupler
- Uses standard 14 oz. cartridge or can be bulk filled
- Posi-lock follower rod with T-handle provides sure-handed grip and easy filling at any position
- Heavy-duty steel barrel
- Electro-static
- Non-slip knurling
- One-hand operation
- Corrosion-resistant finish



LING103

Mini 3 oz Lever-Action Grease Gun

- Compact and lightweight. Conveniently stored in tool box or tray
- Lever-action design produces 6,000 psi far exceeding mini-pistol grip models
- Ideal for light-duty vehicle, marine, ATV, lawn and garden, motorcycle, trailer
- Cast aluminum head, powder coated barrel, comfortable vinyl grip
- Uses 3 oz. cartridge or can be hand packed / bulk filled

LINCOLN
®



LING102

"The Bulldog" Premium Lever Action Grease Gun

- Features electrostatic, corrosion-resistant finish and non-slip knurling for better grip
- Filler nipple for 3 way loading; bulk, filler pump or cartridge
- Bleeder valve allows purging of air from gun head
- Includes sure-handle grip
- Heavy duty steel barrel for long life



LIN1147

2 Way Loading Lever Action Manual Grease Gun with 18" Whip Hose and Coupler

- Designed for rough treatment on the job with a cast iron pump head, precision fit plunger and extra heavy follower spring
- Length is 21-3/4"
- Jam proof toggle mechanism prevents binding or accidental bedding of plunger
- Exclusive "flip over" follower provides a superior seal for cartridge applications



LIN1148

2 Way Loading Lever Action Manual Grease Gun


- Has a handle grip and vent valve for purging air from gun
- Two-way filing, suction and cartridge
- Variable stroke / variable pressure: short stroke-high pressure; long stroke-high volume
- Lube capacity: 16 oz. bulk / 14.5 oz cartridge
- 21-3/4" in length

**PLEWS &
EDELMAHN**

PLW30-416

Pistol Grip Grease Gun with 18" Whip Hose

- Variable stroke for use in tight spaces
- 3 way loading
- Develops 7000 psi at tip
- Delivers 1 oz. of grease per 40 strokes
- 18" whip hose and vinyl grip

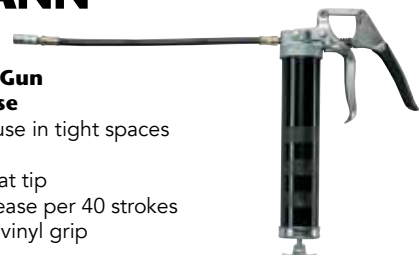

FLUID AND GREASE

Suction Grease Guns



CTA7075

Extraction/Filling Syringe - 200 cc

- Handles all automotive fluid, including brake fluid
- Includes (2) sets of seals (also available individually)
- Extra hose extensions (CTA #7079) also available
- Clear plastic for easy viewing fluid
- Includes spring loaded detachable tube with cap



KT173919

Suction Gun with 12" Vinyl Hose

- Transfer gun designed to get gear oils both into and out of gear boxes, transfer cases and differentials
- Capacity 16 oz.
- 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LIN615

20 Oz. Suction Gun

- Provides a fast, clean method of removing and adding transmission fluid, gear oil or oil filter service
- Precision follower fitted to barrel for superior suction
- Follower impervious to oil, grease and water
- Finished in rust-resistant, powder coated blue paint



LING150

Suction Gun

- 18 oz. capacity with 12" flex hose
- Perfect for draining and filling differentials, clutches, power steering reservoirs and transmissions
- Needs no priming
- Features heavy duty steel barrel, electro-static, corrosion-resistant finish and non-slip knurling

Fittings and Adapters



KT173959

Right Angle Grease Gun Coupler

- 1,000 PSI
- For use with hand grease guns only
- 1-Year Warranty



KT173952

Professional 4 jaw Grease Gun Coupler

- Professional 4 jaw grease gun coupler
- 6,000 PSI
- For hand operated grease guns only
- 1-Year Warranty



KT173957

Grease Injector Needle

- Grease injector needle
- For universal joints and sealed bearings
- Length: 1-1/2" • Diameter: 18G
- 1-Year Warranty



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT173903

Needle Nose Dispenser 1-1/2" Narrow

- Narrow needle nose dispenser
- For use with hand grease guns only
- 1-1/2" x 0.156" needle
- 1-Year Warranty



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Grease Gun Hose

- Working pressure: 3,500 PSI
- Burst pressure: 11,600 PSI
- For hand operated grease guns only
- 1-Year Warranty



KT173912 - 12" KT173918 - 18"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLUID AND GREASE

Fittings and Adapters



KT100023 60-Piece Grease Fitting Kit (SAE)

- Includes 1/4-28 sizes
- Used on cars, light trucks and industrial machinery
- Requires a tapped hole for installation
- Max pressure is 8,000 psi
- Kit contains: straight, 45° elbow, 90° elbow and long straight fittings

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT100074 110-Piece Hydraulic Grease Fitting Assortment Fractional

- 110-piece hydraulic grease fitting assortment kit includes six popular sizes from 1/4-28 to 1/8-27
- Kit contains straight and 45° and 90° angled fittings

Description	Qty	Description	Qty
1/4"-28	30	1/8"-27 (90°)	15
1/4"-28 (45°)	15	1/8"-27 (45°)	15
1/4"-28 (90°)	15	1/8"-27	20

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT100024 90-Piece Grease Fitting Kit (Metric)

- Includes 6mm, 8mm and 10mm fittings in nine popular sizes
- Kit contains straight, 45° elbow, and 90° elbow fittings packaged in multicompartment, refillable plastic case
- Contains assortment map for easy identification of components

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT100096 110-Piece Metric Grease Fitting Assortment

- 110-piece metric grease fitting assortment kit includes six popular sizes, ranging from 6mm to 10mm

Description	Qty	Description	Qty
6mm	30	10mm (90°)	20
6mm (45°)	15	10mm (45°)	15
6mm (90°)	15	10mm	15

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Extension for Manually or Air-Operated Grease Guns

- Maximum working pressure: 4500 psi
- Coil spring prevents hose kinking
- Standard 1/8" NPT threads

LIN5812 - 12" LIN5818 - 18"



Whip Hose for Grease Gun

- Attach to PowerLuber with 7/16" UNEF fitting
- 1/8" NPT(m) outlet
- Working pressure 7500 psi (517 bar)

LIN1224 - 24" LIN1230 - 30" LIN1236 - 36"

FLUID AND GREASE

Fittings and Adapters

LINCOLN
®




**LIN5805
Impact Fitting Cleaner**

- Clears hardened grease from fittings and joints
- Eliminates the need to disassemble joints or replace fittings
- Hardened piston, steel drive cylinder, spare drive seals and safety shield for hand
- Comes with optional high pressure flex hose and Lincoln's (5852) coupler

**LIN5807
Grease Injector Needle with Hose**

- Includes a threaded protective cap
- The flexible line design keeps your hands away from the needle when attaching and detaching from grease coupler
- Includes a quick-connect fitting point to limit grease by-pass



**LIN5845
Heavy Duty Hydraulic Coupler**

- For contacting hydraulic grease fittings
- Ball check prevents leaks when coupler is not in use
- Inlet 1/8" NPT female
- 7500 psi maximum operating pressure



**LIN5848
Hydraulic Coupler Adapter**

- 7000 PSI maximum operating pressure
- Built-in swivel allows full 360° circle
- Locks in any one of eight 45° positions
- Adjustable coupler section permits contact with fittings in reverse positions
- Angle body has 1/8" NPT(f) inlet permits addition of pipe extension when required



**LIN5852
Hydraulic Coupler**

- 6000 PSI maximum operating pressure
- For all hydraulic type grease fittings
- Small outside diameter for easy contact with recessed fittings
- Replaceable hardened steel jaws
- Built-in ball check prevents leak and lubricant backup
- Inlet 1/8" NPT(f)



LINCOLN
®

**LIN5853
Coupler Extension**

- Includes 5852 hydraulic coupler and 62028 6" extension tube
- 1/8" NPT connection



**LIN5855
Extension Adapter**

- Straight extension
- Use to lubricate recessed fittings where obstructions will not permit use of hydraulic coupler
- Includes: extension nozzle and quick change locking sleeve



**LIN5858
Flexible and Rigid Extension Adapter**

- Maximum working pressure: 5000 psi
- Allows operator to switch from flexible to rigid extension with one hand
- Overall length: 13" • 1/8" NPT



**LIN5859
90° Angle Grease Adapter**

- 90° angle solves problem of contacting so-called "inaccessible" grease fittings
- Design eliminates need to remove from "deep dish" wheels for lubrication of the tie rod ends and ball joints



**LIN5862
Universal Air Coupler**

- Fits ARO style nipples for 1/4" ID hose
- 300 psi maximum operating pressure
- 1/4" NPT inlet
- Maximum airflow: 38 scfm at 100 psi



**LIN5883
Slotted Right Angle (90°) Coupler**

- 90° slotted design coupler allows access to the tight spots for applying grease
- Eliminates the need to switch to a 90° grease zerk fitting
- Fits all 1/8" hoses and tubes
- Operates at 1,000 psi



**LIN58000
Lube Adapter Kit**

- Press on 90° Lube Tool (5859)
- Straight extension (5855)
- 12" Hose extension (81795)
- Slide on 90° coupler (5884) includes (5883) right angle coupler
- Rubber tipped nozzle (83278)
- Needle nozzle (82784)
- 360° coupler (5849)



FLUID AND GREASE

Fittings and Adapters



LIN5884

Right Angle Lube Adapter

- Right angle lube adapter with 5883 right angle coupler and quick coupler
- Connects to grease fittings from a 90° angle - easy access to hard to reach fittings
- Quick coupler adapter - easy use



LIN81387

Swivel Nozzle

- Maximum working pressure 4,500 PSI
- Strategically placed coil spring provides push/pull grip and prevents accidental "kinking" which could cause hose ruptures
- Length: 12"
- 1/2"-27 (m) x 1/4" NPT (m)



LIN83594

High Pressure Universal Swivel

- 1/4" NPT(m) x 1/4" NPT(m)

LIN81458

Button Head Coupler

- Special Access Coupler, 4,000 psi maximum operating pressure
- For pull-on, push-on or hook-on service
- Use with large 5/8" diameter buttonhead fittings
- 7/16"-27 (f) thread



LIN82399

High Pressure Swivel

- 1/2"-27(m) x 1/4" NPT(m)
- Thread Size: 1/2-27 x 1/4"



LIN82784

Needle Nozzle

with Extension and Locking Sleeve

- Allows operator to contact flush type or hard-to-reach hydraulic type fittings



LIN5803

Grease Needle Nozzle

- Orifice: 1/32" / 0.8mm
- 1/8" NPT (f)
- Length: 2-3/4" / 70mm



Grease Tools



KT173956

Quick Locking Grease Coupler with 1/8" NPT

- Coupler body is heat-treated to withstand high pressures without deformation
- Case hardened rollers hold the coupler in position at 6 points
- Designed for quick & convenient disengagement of coupler from grease fittings under pressure

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LIN5900

Lever-Action Grease Coupler "PowerLock Coupler"

- Works with all grease gun types: pneumatic, manual and PowerLubers. 1/8" NPT fitting
- One-handed operation; coupler remains locked on to fitting without being held in place



LIS34550

Handy Packer Bearing Packer

- Quickly flushes out old grease and repacks bearings with less mess
- The handy packer works on bearings up to 3-1/2" OD

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SGT17650

Drum Faucet

- For use with petroleum products, lacquers, varnishes, thinners, alcohol and auto anti-freeze
- Push lever control
- 3/4" NPT male
- Zinc plated inside and outside for improved corrosive resistance
- Automatically self closing

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLUID AND GREASE

Manual / Air Pumps



KT172205

Barrel Pump - Lever Style

- Two-piece, self-adjusting telescoping suction tube fits 15, 30 or 55 gallon drums
- Removable threaded spout
- Pumps water based fluids, solvents, anti-freeze, weak acids and all oil based fluids
- Zinc plated for lasting quality
- Features cushioned vinyl handle



KT172202

Vertical Lift Chemical Pump

- Nylon Body, Stainless Steel Shaft and Polytetrafluoroethylene (PTFE) Seals
- Non corrosive
- For use with 55 gallon drums
- For use with Antifreeze, Detergent, DEF, Lacquer, Thinners, Acetone, etc.
- Not for use with gasoline, diesel, fuel oil, kerosene, etc.
- Covered by a 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT172210

Lever Transfer Pump 15-55 Gallon Drums

- Lever transfer pump for 15-55 gallon (50-205 liter) drums
- For use with DEF, antifreeze, detergents, windshield fluids, heavy oils, etc (including 80W90 gear oil)
- Delivers up to 1 pint per stroke
- 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

KT172250

Deluxe Siphon Transfer Pump

- Pumps air for inflatables
- Use for changing oil, siphoning gas, and inflating sports balls
- Includes two 51" siphon hoses, 35" dipstick hose and adapter (for changing oil) and 17" air pressure hose

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT172200

Hand Rotary Style Barrel Pump

- Crank handle rotary pumps are used as a siphon
- Rotary hand pumps fit 15, 30 and 55 gallon drums
- Cast iron rotary pump is ideal for heavy oil, machine oil and non-corrosive liquids
- Cast iron body with steel inlet and outlet tubing
- 2" bung adapter is perfect for drum openings

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov




KT172204

Plastic Rotary Transfer Pump

- Glass filled, Polypropylene (PP) body with Rytan
- Rotor & Vanes and Viton seals
- For use with 15 - 55 gallon drums
- Includes drum bung for use with both metal and plastic drums
- For use with Chemicals, DEF, Antifreeze, Detergents, etc. Not for use with gasoline, diesel, fuel oil, kerosene, etc.
- Covered by a 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

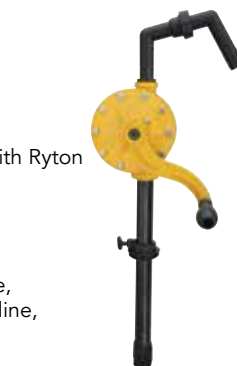

KT173993

Lever Action Bucket Pump 5 Gallon Pail

- Comes complete with 12" drum cover and 4' PVC hose with steel spout
- Designed for transferring transmission differentials & heavier oils
- Delivers 2.14 oz. (60 ml) per stroke

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



PLW55-123

30 to 55 Gallon Heavy Duty Pump Barrel

- Two piece telescoping suction tube fits 30 to 55 gallon drums
- Dispenses approximately 10 oz./stroke
- Complete with standard bung adapter, tough all steel foot valve and piston valve
- With standard garden hose thread discharge spout
- This Plews/LubriMatic™ heavy duty lever operated barrel pump has steel pistons and valves.



FLUID AND GREASE

Manual / Air Pumps



PLW55-440

Heavy Oil Lever Action Dispenser Pump for 5 Gallon Pail

- Self priming
- Complete with 4' oil-resistant hose and drum pail cover
- Used for 5 gallon/35 lb. pail
- This lever action fluid lubricant pump fits open head pails/drums



LIN1340

Lever Action Barrel Pump

- Pumps non-corrosive automotive, agricultural and industrial fluids
- Extended pump body for improved top-of-barrel clearance and excellent flow (14.0 fl oz. minimum per stroke)
- Removable non-drip spout allows for threaded hose connection
- Telescoping pick-up tube for 16-55 gallon drums
- Three tier threaded bung fits standard 2" and 1.5" drums and plastic drums utilizing 56 x 4mm buttress threads



LING401

Lever Action Barrel Pump for 16 to 55 Gallon Drums

- Delivers 10 oz. per stroke
- Includes standard bung bushing
- Rugged, corrosive-resistant finish
- Designed for transfer of petroleum-based, non-corrosive liquids
- Curved metal spout features threads to fit all garden hoses



LIN1293

Hand Operated Bucket Pump Gear Lube Dispenser

- 30 lb bulk container
- Quality manually operated pump provides fast, clean refilling of differentials, gear cases and final drives
- Baked enamel finish helps prevent rust and corrosion
- Smooth, easy pumping action (no crank or gears) dispenses all types of gear lubricants, even in the coldest weather



LIN1385H

Premium 3-Vane Rotary Pump with Hose

- Internal-check prevents drain-back assures immediate restart
- Graphite Three-Vane Design for exceptionally smooth fluid flow for no-splash fills
- High-tolerance micro-finished bore and vanes provide outstanding pump life
- Approx 1 Gallon per 12 Revolutions
- Self Priming / Outstanding vacuum



LIN1335

Heavy Duty Leaver Action Fluid Pump

- Professional series fluid pump for 16-55 gal drums
- Front position handle design simplifies pump use and access
- Brass Piston ring design resists wear
- Multi position handle - adjust to handle low to high viscosity fluids for easy pumping effort and to maximize output
- 8.5 Fl Oz. per full stroke



Fully serviceable. Includes: Heavy-duty 8' x 3/4" anti-static hose with non-sparking aluminum nozzle with hanger; Seal-Tight Telescoping Pick-up tube with strainer for 16-55 gallon drums with 2" bung and H.D.

FLUID AND GREASE

Manual / Air Pumps



LIN1385

Premium 3-Vane Rotary Pump without Hose

- Graphite Three-Vane Design for exceptionally smooth fluid flow for no-splash fills
- High-tolerance micro-finished bore and vanes provide outstanding pump life
- Self Priming / Outstanding vacuum
- 10 Gal/Min at 120 RPM low viscous, 7 Gal/Min at 80 RPM Oil
- Approx 1 Gallon per 12 Revolutions



LIN1387

Premium 3-Vane Rotary Fuel Pump with Hose

- Internal-check prevents drain-back assures immediate restart
- Self Priming / Outstanding vacuum. 10 Gal/Min at 120 RPM low viscous, 7 Gal/Min at 80 RPM Oil
- Graphite Three-Vane Design for exceptionally smooth fluid flow for no-splash
- High-tolerance micro-finished bore and vanes provide outstanding pump life
- Fully serviceable. FM APPROVED



Fluid types: gasoline, diesel, kerosene, coolant, non-corrosive materials, medium viscosity petroleum based fluids, hydraulic oils, ATF

Includes:

- Flame Arrestor and Anti-Siphoning Vacuum Break
- Heavy-duty 8' x 3/4" anti-static hose with non-sparking aluminum nozzle with hanger
- Seal-Tight telescoping pick-up tube with strainer for 16-55 gallon drums with 2" bung

LIN917

Air Operated Grease Pump

- Will dispense 45 ounces or 80 cubic inches of NLGI 0-2 grease per minute at 150 PSI.
- Assures positive prime at lowest temperature
- Drum cover 46007 finished in Lincoln red; roll-a-round base 80895 base in black; air motor cover in white
- Height 43-1/8" • Base 17" square
- Drum not included



LIN9989

Heavy Duty PMV Grease Pump for 50:1, 25 - 50 lb.

- Twice the output of standard pumps, for longer life on the same job
- Smooth and quiet, improves the environment for the shop as well as customers
- Volume and pressure to handle any additional practical hose length
- Simple design of precision-machined parts
- Reduced cost of ownership for the life of the pump



LIN989

Heavy Duty Grease Pump for 25-50 lb. Drum

- Steel cover securely clamps to any 25-50 lb refinery container
- Carrying handle provides portability
- Follower plate assures positive prime at lowest temperatures
- Cover is rust-proofed and finished in Lincoln red
- Bucket shown is NOT included



LIN4489

Value Series 40:1 Single Acting Grease Pump for 25-50 lb. Pail

- High pressure
- Portable medium to light duty chassis lubrication
- Proven valved piston design
- Simple grease plunger/bushing
- Includes: 40:1 series pump, pail cover, handle, high-pressure control valve, universal swivel, coupler, 7' connecting hose, and follower plate
- Pail not included



LIN740

Heavy Duty High Pressure Control Valve

- 7500 psi maximum operating pressure
- Precision-machined, all steel handle, body and guard bracket provides durability and longevity
- Unique, precision control inlet check valve provides ease of handle operation even with increase in pressure
- Knurled handle for positive grip
- Handy trigger guard prevents pinching



FLUID AND GREASE

Manual / Air Pumps



LIN4417 Grease Pump Assembly for 120 lb. Drum

- 40:1 ratio professional quality pump assembly for the automotive repair shop
- Includes 7' hose, control valve, universal swivel for easy operation, drum cover
- Flexible follower plate for positive prime
- 4 caster band-dolly for easy mobility around the shop
- 1 yr warranty on material and workmanship



LIN6917 Air-Operated Portable Grease Pump Package

- Lincoln's time tested 50:1 double acting grease pump is at the heart of the package
- High volume and pressure to handle additional hose length and/or adapt to hose reel
- Standard follower wipes 120 lb. drum sides clean and keeps the drum primed

Package includes: high pressure 50:1 pneumatic pump, high pressure grease control valve, universal swivel and coupler and 7' hose; drum cover, flexible follower plate and band dolly with wheels.



LIN9917 Heavy Duty PMV Grease Pump with Caster Base for 50:1 - 120 lb. Drums

- Twice the output of standard pumps, for longer life on the same job
- Smooth and quiet, improves the environment for the shop as well as customers
- Volume and pressure to handle any additional practical hose length
- Precision-machined parts which allows longer pump life



Electric Pumps



SPM319 Economy Grease Pump System for 5 Gallon (35lb) Pail

- 55:1 ratio pump with carry handle
- 5' high pressure delivery hose
- Light weight and portable
- Repair only up to 1 year



SPM320 Economy Portable Grease Pump for 120 lb. Keg

- Fits 16 gallon pail
- 5' pressure delivery hose
- Two wheel cart
- PumpMaster 3 Grease pump
- Straight swivel grease control gun
- Repair only up to 1 year



PORPARPMP01640A Portacool™ Pump for Classic and Hurricane series

- Factory authorized replacement pump for Portacool Classic and Hurricane series portable evaporative coolers
- Quick connect installation makes replacement easy
- Recommended tools for installation are flat and phillips screwdriver, pliers, wire ties and clippers
- View Instructional YouTube video titled: Pump Replacement for Portacool Coolers
- Use safety and caution with electrical devices and replacement



FLUID AND GREASE

Electric Pumps

LINCOLN



LIN1550

Heavy Duty 12V DC Fuel Transfer Pump, 15 GPM

- Safely transfers Diesel, Kerosene and Mineral spirits, delivering up to 15 gal./min
- Three-piece telescoping pick-up tube supports a very wide range of tank depths
- Pre-wired electrical box allows for easy set-up. Fully serviceable. 18 ft. (5.5 m) cable for operator convenience
- Weatherproof cast-iron design with high-flow 1" inlet and outlet
- 360 degree locking 2-inch bung for perfect nozzle positioning
- 13 ft. (4 m), commercial-grade, kink-resistant, anti-static hose
- Stainless steel 90-degree hose adapter
- Long-life, low-friction polymer vanes provide extended service intervals

Diesel and Kerosene applications including - Agriculture, Heavy Equipment, Construction, Trucking/Transport, Industrial, Aerospace and Home Heating For use with Diesel, Kerosene and Mineral Spirits only*

*Not for use with gasoline

LINCOLN



LIN2424

3:1 55 Gallon Drum Series 25 Pump

- Motor oil, ATF, gear lube and other fluid lubricants
- Balanced double-acting pump design provides uniform output and stroke for less pulsation
- Lightweight, corrosion-resistant zinc head casting design incorporates uniform wall thickness
- Material Outlet: 1/2 in. NPT
- Air Inlet: 1/4 in. NPT



LIN85627

Diaphragm Pump 1" Aluminum

- 1" 1:1 Air-operated diaphragm pump line
- Pump body: Aluminum • Pump inlet/outlet: 1"
- Low interval velocities move abrasives easily with no damage
- Gentle pumping action does not shear fragile materials
- Even heavy or solids-laden materials can be pumped



LEGL6100

Performance™ Series 55:1 Ratio Grease Pump System (16 Gallon)

- For 16 gallon (120 lb.) keg with booster gun and dolly
- Used in either mobile or stationary systems for grease distribution, these versatile high pressure grease pumps can handle all types of mineral and synthetic greases up to and including NLGI2 directly from 120 lb. grease containers
- Constructed using corrosion resistant parts including aluminum and alloy steel, with PTFE, Buna-N, and nylon seals for longer life and trouble free operation
- Backed by outstanding service and a 5 year extended warranty

Includes: grease pump, lid for 120 lb. keg, drum dolly, booster gun with "Z" swivel, universal follower plate for tapered or straight keg, 12' high pressure grease hose with 1/4" MNPT ends, 1/4" female coupler and 1/4" male plug.



FLUID AND GREASE

Electric Pumps



FILRD812NH 12V DC Portable Pump with Hose and Nozzle

- Portable Fuel Transfer Pump
- Pumps up to 8 GPM
- Lightweight Aluminum Construction
- Pumps Gasoline, Diesel, Kerosene and E15
- Multiple mounting options

Portable fuel transfer pump with a 10' quick connect battery cable. 6' suction hose and 8' discharge hose with nozzle included. Lightweight aluminum construction makes it the most versatile DC pump available.



KTI72215 Electric 19.2 Volt Rechargeable Drum Pump w/ (1) 18.5V NiCd Battery and Quick Charger

- Compact & lightweight polyacetal body
- Telescopic pump tube for use with 55 gal. (205 Litre) drums as well as 275-330 gal. (1000 to 1250 Litre) IBC's
- Built-in 2" bung & an additional bung converter (2.5" x 5 buttress) for use with plastic drums & IBC's
- Delivers up to 28 lpm (7.4 gpm) or up to 410 litre (110 gal.) on a single battery charge



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



AMERICAN
FORGE & FOUNDRY™

INT8055 DEF Lever Action Barrel Pump

- Unique blue color to notate DEF
- Included suction tube for 15-55 gal drums with 2" bung (included)
- Delivers 1 pint (500 ml) per stroke
- Pumps high viscosity oils with no fatigue
- Can also be used as a siphon



Dispensing



ASSATFBASIC Basic Drive Line Filling Set

- Used only to Fill, Not to Drain-- So Clean Fluid Stays Clean
- 8 quart Capacity
- Quick Attachment Adapters
- Pump Dispenses Efficiently
- Hose Length: 4ft 10in



FILFR1614 DC Power Cast Iron Rotary Vane Pump

- Includes battery cable with clips
- 8' of 3/4" hose - Pick up tube strainer and plastic 3/4" nozzle
- Compatible with Diesel and Antifreeze
- 10 GPM flow rate

FLUID AND GREASE

Dispensing



MITMVA5800 ATF Refill Adapter Kit

- Adapters are chrome-plated for durability and resistance to dirt and rust
- Designed to connect directly to and/or service OEM transmissions
- Packed in convenient custom-molded case
- Ten (10) custom ATF refill adapters to fit most manufacturer's transmissions

Includes: MVA580 Ford ATF Refill Adapter; MVA581 Toyota ATF Refill Adapter; MVA582 Angled Refill Adapter; MVA583 VW Angled ATF Refill Adapter, Short; MVA584 VW Angled ATF Refill Adapter, Long; MVA585 VW ATF Refill Adapter; MVA586 VW/Audi ATF Refill Adapter, DSG; MVA587 Audi ATF Refill Adapter, CVT; MVA588 Mercedes ATF Refill Adapter; MVA589 Volvo ATF Refill Adapter.



MITMVA7216 ATF Refill Accessory Adapter Kit

- Facilitates the use of Mityvac MV7201 Fluid Evacuator Plus to fill and top-off sealed automatic transmissions
- Brass ball valve allows independent control of fluid flow to the transmission
- Includes ten (10) custom ATF refill adapters to fit most manufacturer's transmissions



MITMV6400 Fluid Dispensing System

- Large 1.2-gallon (5-liter) fluid capacity
- Fluid is dispensed under pressure for smooth continual flow
- Integrated manual pump adds air above the fluid level to prevent aeration
- Internal pump components are sealed against exposure to fluids
- Pressure gauge indicates fluid dispensing pressure. Integrated safety and manual pressure relief valve



Applications:

- Dispenses fluids to fill or top-off master cylinders, coolant bottles, automatic transmissions, differentials, and power steering and other reservoirs.
- Performs hydraulic brake and clutch bleeding with additional adapter purchase



MITMV6410 ATF/Drive Line Refill System

- Includes ten (10) adapters to connect to Ford, Toyota, BMW, Honda, Nissan, VW, Audi
- Large 1.2-gallon (5-liter) fluid capacity
- Fluid is dispensed under pressure for smooth continual flow
- ON/OFF and flow control valve are conveniently located near fluid output
- Integrated safety and manual pressure relief valve

Includes:

- 1.2-gallon (5-liter) Fluid Reservoir
- Reservoir Lid with integrated manual pump, pressure gauge, and pressure relief valve
- 5' Fluid Dispensing Hose with flow control and auto-shutoff valves
- MVA5800 ATF Refill Adapter Kit (includes ten adapters, part numbers MVA580 – MVA589)
- Fluid Dispensing Wand
- Hanging Hook
- User's Manual (English, French, Spanish, German)
- Custom molded storage case for adapters

MITMV6412 2.5 Gallon ATF Refill System

FLUID AND GREASE

Dispensing

LINCOLN
®



LIN877

Metered Control Handle for Oil and ATF

- For oils, ATF and antifreeze
- 3-1/2" diameter
- 1/2" NPT (f) inlet/outlet
- Includes 10" hose
- 1 year warranty on material and workmanship

LINCOLN
®



LIN967

METER, ELECTRONIC

- Dispenses motor oil, ATF and gear lube
- Automatic non-drip nozzle
- Narrow nozzle fits into small I.D. ATF fill tubes
- Easy to read digital display for accurate bulk dispensing
- Includes inline swivel, rigid extension, automatic non-drip nozzle and inline containment filter

LINCOLN
®



LIN905

Electronic Lube Meter

- Rigid, 70 degree/Auto non-drip nozzle
- 1000 psi
- Offers preset mode
- ATF, hydraulic fluid, motor oils, gear oils
- Easy to read digital display for accurate bulk dispensing

TUTHILL
Transfer Systems

FILL-RITE



FILN100DAU12G

Diesel Nozzle High Flow

- Suitable for gasoline, diesel, E15, biodiesel up to B20, and kerosene
- Integral hook and spout spring
- Three locking flow-rate positions
- Heavy duty aluminum body

AST

ASSENMACHER
SPECIALTY TOOLS
ASTTOOL.COM



ASSCRY933

Chrysler Transmission Dipstick

- Temperature/Oil level charts included
- This dipstick is used on all vehicles equipped with a NAG1, 42RLE, CVT Transmission and the 62TE Transaxle

IPA
FUTURE NOW®



IPA9070A

120V AC DEF Transfer System with Automatic Shut-Off Nozzle

- The #9070 DEF Transfer System is a professional and complete turnkey solution, powered by an innovative and durable 9 GPM 120V AC pump • Self-priming
- Corrosion-resistant fittings • Highly accurate, digital flow meter
- Standard equipment includes bracket assembly for totes, DEF-rated 6' intake and 8' output hoses, DEF-rated transfer nozzle (automatic shut-off)
- Conveniently mounts to DEF tote containers
- 3 Year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLUID AND GREASE

Dispensing



LIN279092

Lube Trolley Package (Oil)

- Makes dispensing possible without installed overhead reels or bench tanks
- Easily maneuverable on uneven surfaces in shop or factory
- Ability to dispense lubricant directly from 55-gallon (208 l) drums
- Durable, heavy-duty construction
- 1 yr warranty on material and workmanship

Package includes pneumatically operated pump, HD hose reel, metering device, air control with filter, gauge, connection hoses and fittings.



LIN279091

Lincoln Industrial Premium Lube Trolley Package

- Makes dispensing possible without installed overhead reels or bench tanks
- Complete package includes trolley, pump, 30-foot (9 m) reel assembly, control valve and swivel, air control with filter/regulator/gauge, connection hose and fittings
- Easily maneuverable on uneven surfaces in shop or factory
- Ability to dispense lubricant directly from 400-pound (181kg) drum w/ HD 50:1 pump
- Durable, heavy-duty construction

Evacuators / Extractors



DOWJDI-20EV

20 Gallon Fluid Evacuator

- One gallon of BlueDEF is used approximately every 300 miles
- A truck with a 20 gallon DEF tank can go up to 6000 miles between fill-ups
- When used in an SCR system BlueDEF will reduce the levels of NOx emissions of those engines



MITMV7201

Mityvac Fluid Evacuator Plus

- Provides a clean, fast and simple way to evacuate fluids
- Removes most auto liquids and chemicals, including transmission fluid, coolant, brake fluid, gear oil and engine oil
- Durable poly construction
- 8.8 Liter (2.3 gal) MANUAL Evacuator
- Bi-functional (extract and dispense)



MITMVA6852

1.5L Fluid Extractor / Dispenser with ATF Adapter Connector

- For extracting and dispensing fluids such as diesel fuel, motor oil, brake fluid, transmission fluid, rear differential fluid, and coolant in vehicle service applications
- Simple manual syringe-type action extracts or dispenses fluid quickly and cleanly
- Integrated valve and cap to prevent spills and leaks
- Compact, streamlined design allows access into tight spaces
- Ideal for evacuating or topping off Fluid reservoirs

FLUID AND GREASE

Evacuators / Extractors



LIN3637

25 Gallon Used Fluid Evacuator

- Powerful compressed-air-operated venturi vacuum quickly draws fluids from reservoirs
- Includes six evacuation wands of varying flexibility, diameter and length
- 25-gallon (95-liter) welded steel tank supported by heavy-duty 4" (100mm) swivel casters and 6" (150mm) fixed-axle wheels
- Convenient tool tray for storing vital tools and drain plugs; tank-mounted clip and handle hook to secure discharge hose and evacuation hose
- Pressurized self-evacuation feature requires only shop-air and a tire chuck to discharge fluids
- Evacuates automotive fluid reservoirs including motor oil and transmission fluid directly through the dipstick tube.



DOWJDI-6EV

6 Gallon Fluid Evacuator

- 6-gallon steel tank (evacs 70% of capacity)
- Both empty and vacuum charge by using air pressure
- 7" wheels for easy handling
- Easy-to-read vacuum gauge
- 10' evacuation hose
- Sight tube shows fluid level
- Storage tube for suction probes



Extract used oil and other fluids from any vehicle using this vacuum extraction system. Vacuum charged unit is completely portable and easy to use. Includes five suction probes (metal and flexible plastic) equipped with quick-disconnect couplers for fluid extraction from the dipstick or other opening. Adapters for BMW, Mercedes and VW are also included. Self-evacuating feature makes emptying clean and easy.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



MIT7300

PneumatiVac Fluid Evacuator

- Operates on compressed air
- Integrated 2.3 gallon capacity reservoir
- Large base with foot stabilizer
- Durable, chemical resistant polyethylene construction
- Independent air shut off valve
- Also includes brake/clutch bleeding kit (7205) for vacuum bleeding hydraulic brake and clutch systems



MIT7400

Fluid Evacuator

- Convenient manual pump operation
- Integrated 1.9 gallon capacity reservoir
- Large base with foot stabilizer
- Automatic overflow protection
- Includes accessories for draining engine oil or transmission fluid directly through the dipstick tubes



KT170113

7.9 qt. Manual Fluid Extractor

- Manual operation
- Capacity: 7.9 qt. (7.5L)
- Maintenance free
- Transparent tank to see fluid level
- Modularized design to provide best performance
- Covered by a 1-year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



HPK10801

Shaker Siphon

- 6' Flexible anti-static tube
- Moves up to 3.5 gallons per minute
- Corrosion resistant fitting
- Applications: water, gasoline, diesel fuel, kerosene, solvents and lubricants to the thickness of 20 grade oil



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLUID AND GREASE

Evacuators / Extractors



MITMV7241
Fluid Transfer Pump

- Siphons, evacuates and inflates
 - Durable polyethylene construction won't rust or corrode
 - Hand operated, lightweight, and portable
 - Air pressure hose • Dipstick hose
- Includes: hand pump with intake and discharge ports, 2 intake/discharge hoses, 2 intake/discharge hose connectors, inline reducer and instruction manual.



MITMVA6851
Fluid Extractor

- Simple syringe-type action extracts or dispenses fluid quickly and cleanly
- Ideal for evacuating or topping off master cylinders and other small reservoirs
- Includes 7 oz. (200 cc) capacity fluid extractor, Extraction hose with cap, and Service Sheet



KT172250
Deluxe Siphon Transfer Pump

- Multi use, transfers most liquids
- Pumps air for inflatables
- Use for changing oil, siphoning gas, inflating sports balls and beach toys
- Includes two 51" siphon hoses, 35" dipstick hose and adapter (for changing oil) and 17" air pressure hose

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LIS17282
Fluid Transfer / Extractor Pump Set

- Works for transferring or siphoning all types of automotive fluid
- Quickly removes transmission oil from automatic transmissions that are over filled
- Also works great for adding oil to differentials
- Translucent 1.1 Quart /1.1 Liter capacity cylinder body is marked in both English and Metric
- Includes two valves; a shut off valve for transferring fluids and a siphon valve with intake and discharge hoses



CTA7075
Extraction/Filling Syringe - 200 cc

- Handles all automotive fluid, including brake fluid
- Includes (2) sets of seals (also available individually)
- Extra hose extensions (CTA #7079) also available
- Clear plastic for easy viewing fluid
- Includes spring loaded detachable tube with cap



MITMVA670
Power Steering Air Bleed Adapter Kit

- Adapters form an airtight seal in the neck of a vehicle's power steering pump, allowing for air evacuation
- All three adapters include an inline, barbed connection for a 1 - 4" internal diameter hose
- These adapters will work with your Mityvac and most other brands hand vacuum pumps
- A 90-degree barbed connector, MVA665, is available separately and can be interchanged with the inline connector on MVA661 and MVA662 for applications with limited overhead access
- Featuring a robust design and construction

Drains



DOWJDI-18DCP
18-Gallon Poly Portable Oil Drain

- 18 gallon poly translucent tank
- 18" diameter funnel with strainer
- Evacuation spout and gravity drain valve
- 2-1/2" heavy-duty casters
- Drain adjusts from 48" to 71"



FLUID AND GREASE

Drains



LIN3614

Pressurized Used Oil Evacuation Drain

- 20 gallon, steel pressurized used oil drain with 18" offset bowl
- Catches fluid without repositioning tank
- Includes fixed air regulator, pressure relief valve and hose hanger
- Telescopic bowl 44-72 for greater flexibility
- Low profile design - extremely stable and easy to maneuver
- 1 year warranty on material and workmanship



DOWJDI-LP5

25 Gallon Low Profile Oil Drain with Electric Pump

- Baffled reservoir prevents splashing when moved
- 25-gallon measured capacity (22-gallon functional capacity)
- Equipped with a 110v electric pump standard
- 6" industrial casters for easy handling
- Size 48"L x 25"W x 8"H
- 1 year warranty on material and workmanship

DOWJDI-18DC

18 Gallon Self-Evacuating Portable Oil Drain

- Auto-Check Technology for easy and automatic drain evacuation
- Pressure relief safety valve
- Oil and chemical resistant 3" casters for longer life
- Reinforced 16" deep drawn centered funnel
- 6' discharge hose
- Height adjusts from 36.5" to 59"
- Four 3" chemical resistant casters
- OSHA friendly labeling

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DOWI25HDC

25 Gallon Self-Evacuating Oil Drain

- Uses air pressure to empty tank
- Removeable 6' Quick-Disconnect discharge hose
- Molded tool tray on top of the tank
- 16" deep drawn offset funnel with expanded metal screen
- Swivel base on funnel makes positioning easy

Height adjusts from 50" to 70". Heavy-duty 4" casters provide stability and mobility. 25 gallon steel tank. All metal funnel. Built-in sight glass shows fluid level in the tank.

DOWJDI-16DC-E

16 Gallon Portable Oil Drain

- Heavy Duty steel tank
- 16" deep drawn centered funnel with expanded metal screen
- Positive height adjustment from 50" to 70"
- Built-in sight tube shows fluid level
- Drain valve included
- Optional conversion kit (No. 61431-2) adapts drain for use with pump evacuation system
- Two 4" swivel caster and two 6" fixed wheels



FLUID AND GREASE

Drains



DOWJDI-27DC 27 Gallon Deluxe Self-Evacuating Poly Oil Drain

- Heavy-duty polypropylene tank with 4" heavy duty casters
- 16" deep drain funnel with expanded metal screen - height adjustments from 45" to 70"
- Self-evacuating with regular shop air
- Built in tool pockets on top of the tank, molded for "cap-style" filter wrenches
- Includes pressure release safety valve, air regulator, and evacuation hose



Designed for efficient use and maneuverability. Rolls on four large casters. Built-in tool pockets on top of the tank. Built-in sight glass shows fluid level in tank. Includes pressure release safety valve and air regulator. Empties easily with shop air pressure. Handles on all four sides for easy maneuverability. Poly drain body prevents accidental damage to a vehicle's finish.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DOWJDI-27GFD 27 Gallon Poly Portable Oil Drain

- Heavy-duty polypropylene tank with 4" heavy duty casters
- 16" deep drain funnel with expanded metal screen - height adjustments from 45" to 70"
- Built-in fluid sight-glass shows fluid level in tank
- Built in tool pockets on top of the tank, molded for "cap-style" filter wrenches
- Empties by gravity valve or pump assistance



Handles on all 4 sides. Built-in tool pockets on top of the tank. Sight tube displays fluid level in the tank.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DOWJDI-22DCX 22 Gallon Oil Change Station

- Built-in filter drains easily holds 4 to 5 standard automotive filters, eliminating the need to transfer filters to separate container for draining prior to disposal
- Molded tool pocket keeps wrenches, pliers and other tools readily accessible
- 2" port opening allows easy access from the top of the drain for oil evacuation
- 16" heavy duty polypropylene funnel



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DOWJDI-8DCP 8 Gallon Poly Portable Oil Drain

- 16" diameter funnel with strainer
- 2-1/2" heavy-duty casters
- Drain adjustable from 48" to 67" tall
- Spout for evacuation

The red translucent poly tank allows for easy viewing of oil level. A spout for evacuation and handles are built into the tank for improved usability.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DOWJDI-LP4 Low Profile Oil Drain - 17 Gallon Capacity

- All steel construction
- Expanded metal screen reduces splash
- Large heavy duty wheels and 6" casters
- 9" low profile • 48" long x 25" wide x 9" high
- Drain can be emptied by gravity drain, evacuation pump or air evacuation



DOWJDI-EK Evacuation Kit for DOWJDI-LP4

- Includes all parts necessary to empty DOWJDI-LP4 with Air Pressure
- Coverts the JDI-LP4 into a self-evacuating kit
- Drain not included • Safety relief valve
- 1 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLUID AND GREASE

Drains



DOWJDI-17PLP 17-Gallon Poly Low-Profile Oil Drain

- 17 Gallon high-impact poly tank with t-handle that folds for handy storage
- (4) 5" heavy-duty casters
- Expanded metal shield
- Gravity drain valve
- Lightweight and dent resistant

The 17-gallon poly low-profile oil drain is perfect for heavy-duty trucks or other low-profile oil and antifreeze applications. The tank is made of high-impact polypropylene for lightweight and dent resistant maneuverability. An optional 110v Pump Kit (DOWJDI-17PK) is available for evacuation.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LIN3626 Black Polyethylene Used Fluid Drain, 26-Gallon

- Heavy-duty 26-gallon tank is molded of durable, lightweight, corrosion resistant polyethylene
- Durable 4" swivel casters and 10" fixed-axle wheels are resistant to shop chemicals and run smoothly across rough shop floors. Large handles on the front and back make the drain easy to maneuver into position and for storing vital tools and drain plugs
- Large 17" diameter offset funnel rotates to catch streaming oil and includes a removable filter screen
- Funnel height adjusts from 50 to 75 inches and a 3/4" male camlock style connector extends from the top of the tank for quick, clean fluid extraction using a diaphragm pump or other fluid transfer system
- Three large pocket recesses are ideal for allowing used filters to drain. Built-in, easy-to-read fluid level sight gauge

APPLICATION:

Collection of used fluids including motor oil, transmission fluid, and coolant from under lift-mounted vehicles.



LIN3635 25 Gallon Used Fluid Drain

- Convenient tool tray for storing vital tools and drain plugs, tank-mounted clip and handle hook to secure discharge hose
- 15" (380 mm) diameter drain bowl with removable filter screen and 24" (610 mm) wide-mouth funnel extension
- 25 gallon (95-liter) welded steel tank supported by heavy-duty 4" (100 mm) swivel casters and 6" (150 mm) fixed-axle wheels
- Funnel height adjusts from 51" to 76" (130 to 195 cm)
- 7' long nylon-reinforced discharge hose with steel J-hook and tethered drip plug
- LTL Shipping Only



LIN3508 8 Gallon Used Fluid Drain

- Durable, high-density polyethylene reservoir. Reservoir's flat-top design holds drain filters, tools, nuts, bolts, etc.
- Quick-adjustment clamp enables simple raising and lowering of the drain funnel
- Drain adjusts from 36" to 65" (91 to 165 cm) in height
- Splashguard for overspray protection
- Optional cam lock evacuation kit for use with diaphragm pump systems
- 1 yr warranty on material and workmanship

FLUID AND GREASE

Drains

LINCOLN
®



LIN3624

Pressurized 26 Gallon Plastic Used Fluid Evacuation Tank

- Can pressurize tank with normal shop air
- Large tool tray and convenient oil filter drain built into top to tank
- High strength polyethylene reinforced tank and bowl - no corrosion, denting or swelling
- Large telescopic bowl can adjust from 52 in. - 78.5 in.
- Includes sight gauge, fixed air regulator and pressure relief valve for added safety

LINCOLN
®



LIN3601

Used Oil Receiver

- All steel design includes reinforced caster supports for durability and dependability
- 18 gallon tank includes a preset air regulator that allows the use of standard shop air up to 150 PSI
- 14" telescoping bowl with a height adjustment range of 45" to 72"
- Reinforced dispensing hose doubles as a sight gauge to prevent overfilling
- Includes safety valve

Designed to provide a safe, affordable option for draining, transferring and evacuating motor oils, as well as transmission and power steering fluids quickly. It offers excellent mobility, easy bowl positioning and simple-to-use pressurized evacuation. Weight: 66 lbs.



LIN3639

25 Gallon Combination Drain & Evacuator

- Powerful compressed-air operated venturi vacuum quickly draws fluids from reservoir
- 25-gallon welded steel tank supported by heavy-duty 4" swivel casters and 6" fixed-axle wheels
- Includes Mercedes, BMW, and VW dipstick tube adapters, and six evacuation wands of varying flexibility
- Convenient tool tray for storing vital tools and drain plugs, also includes tank-mounted clip and handle hook to secure discharge and evacuation hoses



LIN3665

Low Profile Truck Drain

- Low-profile design can be easily positioned under high-clearance vehicles
- Large 17 gallon (65 liter) capacity reservoir; reservoir molded of high-impact polypropylene
- 6' (1.8 m) long discharge hose with 3/4" male camlock connector for fluid extraction
- Four large 4" (100 mm) diameter swivel casters
- Removable filter screen

Long, pivoting t-handle aids positioning. Application: collection of used fluids including motor oil, transmission fluid, and coolant from under high clearance vehicles.

FLUID AND GREASE

Drains



LIN3667

Low Profile Truck Drain with Manual Pump

- Includes manual rotary discharge pump for fluid evacuation
- Large 17 gallon (65 liter) capacity reservoir
- Low profile design can be easily positioned under high-clearance vehicles
- Reservoir molded of high-impact polypropylene. 6 ft (1.8 m) long discharge hose with 3/4" male camlock connector for external pump
- Four large 4" (100 mm) diameter swivel casters

Collection of used fluids including motor oil, transmission fluid, and coolant from under high clearance vehicles.



RHG42008

RhinoGear Oil Drain Pan "Crude Control" 58 Qt.

- Center Draw to collect fluid with cap
- Four large handle grips help control pouring to make oil clean up/transfer easier
- 1-1/2" spout fits standard opening of 55 gallon drum
- Has a back vent for smooth filling and pouring
- Built-in roller for easy maneuverability



LIN3669

Low Profile Truck Drain with Electric Pump

- Includes 120v electric discharge pump for fluid evacuation
- Low profile design can be easily positioned under high-clearance vehicles
- Large 17 gallon (65 liter) capacity reservoir
- Reservoir molded of high-impact polypropylene and four large 4" (100 mm) diameter swivel casters
- 6 ft (1.8 m) long discharge hose with 3/4" male camlock connector for external pump

Collection of used fluids including motor oil, transmission fluid, and coolant from under high clearance vehicles.



LIS19202

60 Quart Low Profile Truck Drain with Lid

- For large capacity crank cases or radiator systems
- The drain holds 60 quarts and is equipped with four rollers and a handle for transport and easy positioning under trucks
- Cover and curved side design help keep oil from spilling during movement
- Convenient handles and pour spout facilitate oil evacuation
- Supersedes 19122



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLUID AND GREASE

Drains



LIS17432

18 Gallon Oil Lift Drain

- Translucent jug holds 18 gallons and will not warp with hot oil
- Rolls easily with four heavy-duty 2-1/2" wheels
- Metal tubes extend working area from 36 1/2" to 77"
- Drains from the bottom with a brass drain valve
- Large 15" funnel has a built-in strainer to catch drain plugs
- Lifetime warranty does not cover abuse

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LIS11102

8 Gallon Oil Lift Drain

- Large 15" funnel with strainer built-in to catch drain plugs
- Quick release mechanism for fast raising & lowering of upper tube; total adjustment range of 23"
- 8 gallon translucent jug - the new shape in lift drains
- Reinforced base will not warp with hot oil
- Allows use of compact shipping carton that is not UPS oversize
- Has a wide working range from 36-1/2" to 74"
- Has a lower center of gravity for increased stability
- Four 2-1/2" ball bearing wheels that swivel and roll easily
- Heavy-duty adjustment clamp, large handle and big pour spout with threaded cap

This specially shaped, translucent jug holds 8 gallons!

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



OTC5077A

Transfer Tanker with Electric Pump

- Pump moves 5 gallons of liquid per minute through 8' hose (110V)
- Can transfer oil or antifreeze into 15 gallon reservoir
- New fully enclosed electric motor
- Screen attached to reservoir to allow it to be stored on its side
- 4" free-wheeling casters and removable handle
- Used to transfer used engine oil or coolant from an HD vehicle to a waste reservoir

Handles drained oil without spilling a drop! Draining oil from a large displacement engine and getting it to your bulk storage container is a snap with OTC's Transfer Tanker on your team. Used oil is collected in a reservoir, and then rolls smoothly on 4" free-wheeling casters to your storage location. Pump moves five gallons a minute through the 8-foot transfer hose. Handle is removable for easy storage. Screen attached to reservoir allows assembly to be stored on its side. Can also be used for transferring antifreeze. Only 7-1/2" from floor to top of reservoir.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



OTC5097

Lo-Profile Transfer Tanker with Pneumatic Pump

- Only 7-1/2" high • 15-gallon reservoir
- Pump moves five gallons a minute through the 8-foot transfer hose
- Can also be used for transferring antifreeze
- Removable handle for easy storage

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLUID AND GREASE

Drain Pans



KT174645 4.25 Gallon Capacity Oil Drain Pan

- Chemical / solvent resistant
- high density polyethylene construction
- Large spout for fast pouring complete with spout cap
- Built-in anti-splash lip and baffles
- Includes large handle • 1 year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT174647 Antifreeze Drain Pan 4.5 Gallon

- Built-in anti-splash lip & baffles
- High density polyethylene construction, chemical & solvent resistant
- Green color provides visual identification for use with antifreeze
- Covered by a 1-year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT174652 Plastic Measure with Flex Spout - 8 Qt

- Translucent body
- Includes dust cover, flexible spout & cap
- Graduated in quarts & liters
- Covered by a 1-year warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT174640 Axle Drain Pan

- Durable and lightweight HDPE plastic with built-in drop proof spouts that help to recycle oil
- Works for most dual and super single wheels, sizes 22.5 and 24.5
- Use with steel and aluminum wheels, hub piloted or stud piloted, drive or trailer axles
- Catches oil, axle nuts, bearings - most anything removed from the wheel end for service
- Attaches with a hand-tightened lug nut

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KT174641 Drip Tray 22" x 22" x 1.5"

- Chemically resistant polyethylene
- Collects drips, leaks, and spills
- Dimensions: 22" x 22" x 1-1/2"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LIS17922 30 Quart, Heavy-Duty, All-Purpose Plastic Drain Tub

- For draining radiators, crankcases, transmissions, differentials, etc. on cars and trucks
- Designed for easy pouring and disposal
- The apron facilitates washing and sorting parts
- Dimensions 33" x 22" x 8"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LIS19722 8 Quart Catch-All Drip Pan

- Durable polyethylene material
- Dimensions: 24" x 36" x 1-1/2"
- Ideal for use on showroom floors, garages, carports
- Also can be used under equipment
- This drain pan is durable providing longevity and durability

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



FLUID AND GREASE

Drain Pans



RHG11845

5 Gallon Oil Drain Pan

- 5 gallon drain pan for easier, cleaner oil changes
- Fluids drain directly into large opening
- Anti-splash lip
- Molded handle makes carrying, pouring and storing easy
- Tested and approved to be UN/DOT Compliant



DOW2436

"Big Mouth" Transmission Drain Pan - 38" x 24" x 7" Pan

- Designed for long pan transmissions, the "Big Mouth" catches all of the drainage during vehicle servicing
- Measuring 38"L x 24"W x 7"H.
- Made of high-impact polyethylene plastic
- Adapts to any drain with 6" or larger diameter funnel


Oil Cans



KT173901

Pistol Style Oiler with Base 6 oz

- Capacity: 6oz (180 ml)
- Flex spout • 1 Year Warranty



KT173902

Lever Oil Can with Flex Spout 1 Pint

- Capacity: 1 pint (500 ml)
- Flex spout • 1 Year Warranty



Pressurized Sprayers



SUR1000

One Quart Capacity Steel Sprayer

- Can be used with oil and solvent based materials
- Powder coated finish

SUR1000-B - Black


SUR1000-R - Red



SUR8000

16 oz. Capacity Atomizer (Qty. 1)

- Same diameter as an aerosol can and can be used with many products
- Comes standard with Viton® seals
- Powder coated aluminum sprayer with plastic top



TIT19421

Spot Spray Non-Aerosol Sprayer - Twin Pack

- Operating Pressure of 80-150psi (max pressure of 200psi)
- Refillable - not for use with paint products
- Eliminates dangerous or harmful propellants
- Eco-friendly - maximum capacity 32oz.



Spot Spray Non-Aerosol Sprayer

- 80-150 psi operating pressure, refillable
- Not for use with paint products
- Do not use with flammable propellants
- Eliminates dangerous harmful propellants
- Lifetime warranty

TIT19419 - Red

TIT19419 - Blue



FLUID AND GREASE

Plastic & Drum Funnels



LIS24680

Spill Free Funnel

- Eliminates trapped air pockets which usually cause erratic cooling system and heater performance
- Controls the proper amount of coolant entering system and enables unattended filling of the cooling system

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI74620

2 Piece Universal Oil Funnel

- For refilling engine oil, coolants, etc. in passenger vehicles, commercial vehicle, tractors, earth moving equipment, etc.
- Fits on all filler necks with opening between 1" to 3.14"
- No spill - no mess & hands free design
- Covered by a 1-Year Warranty

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

KTI74612

3 Quart Drum Funnel with Hinged Lid and 2" Bung

- Tough industrial quality
- Chemically resistant polyethylene
- Fits 2" thread
- Hinged lid and 2" bung



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

KTI74604

Drum Funnel

- Threaded end screws on to 55 gallon drum or anything with a 2" threaded hole
- Durable, flexible material

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI74630

Triple Funnel Set

- Includes 3-1/2", 5-1/2" and 7-1/2"

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI74601-1

19-1/2" Long Rigid Funnel

- Super deluxe transmission funnel
- Large capacity prevents overflow
- 4-1/2" ID x 19-1/2" long



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI74602-1

Long Flexible Transmission Funnel

- Plastic
- With Flexible Hose

KTI74602-12

Long Flexible Transmission Funnel 12/Pk

KTI74605

1-Qt Funnel with Removable Flexible Spout

- Removeable flexible spout
- Splash screen inserted in spiral grooves of funnel
- Chemically resistant polyethylene

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI74603

The Guzzler Pivot Funnel

- Large capacity funnel has ball pivot at base of funnel
- Directs flow without spilling

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI74606

2 Quart Funnel Safety Red with Screen

- Chemically resistant polyethylene

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI74610

6 Quart Funnel Safety Red with Screen

- Chemically resistant polyethylene

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



FLUID AND GREASE

Plastic & Drum Funnels



Funnels Double Cap

- Double capped funnel keeps the drips in and the dirt out
- This ultimate storage funnel eliminates spills and contaminants, reduces debris and is chemically resistant

KT174607 - 1 Pint - Orange

- Top ID: 3" • Spout OD: 1/2" • Height (without cap): 8.75"

KT174608 - 1.25 Quart - Dark Blue

- Top ID: 4" • Spout OD: 3/4" • Height (without cap): 10.5"

KT174609 - 1.3 Quart - Black

- Top ID: 4" • Spout OD: 1.375" • Height (without cap): 16.5"

KT174611 - 1.5 Quart - Yellow

- Top ID: 4" • Spout OD: 3/4" • Height (without cap): 14.25"

- Flexible spout

KT174613 - 1.66 Quart - Dark Red

- Top ID: 4" • Spout OD: 1.375" • Height (without cap): 14.25"
- Flexible spout



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Form A Funnel

- Moldable and impervious to most liquids
- Unaffected by freezing or temperatures up to 425°

FAFAV-104 - Aviation

FAFGP-102 - General Purpose

FAFTT-103 - Truck and Tractor



LIS17912

55 Gallon Drum Drain Funnel

- Designed to transfer liquids into a 55 gallon drum
- The funnel drain sits on the top cover of 55 gallon drums
- The funnel snout fits into the top bung hole for draining purposes
- Four graduated circular indentations fit different oil filter sizes

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



Oil Filter Crushers



OTC1877

25 Ton Capacity Heavy Duty Oil Filter Crusher

- Handles the big filters (up to 6" diameter and 12-1/2" long) found in trucks, construction equipment, farm implements
- Crushes filters to 1/4 of original size, removing up to 95 percent of filter's oil capacity
- Automatic cycle feature: load the filter, push a button, and walk away
- Air/hydraulic pump works on standard shop air (requires 9 CFM at 100 psi)
- Built-in floor stand (completely assembled)


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



OTC1821

10 Ton Capacity Air Operated Oil Filter Crusher

- Crushes up to four automotive filters (3-7/8" diameter x 9" high) at one time, in approximately 20 seconds
- 100 percent air operation eliminates electrical connections
- Generous size of crushing chamber easily accommodates the largest automotive spin-on filters
- Includes mounting stand

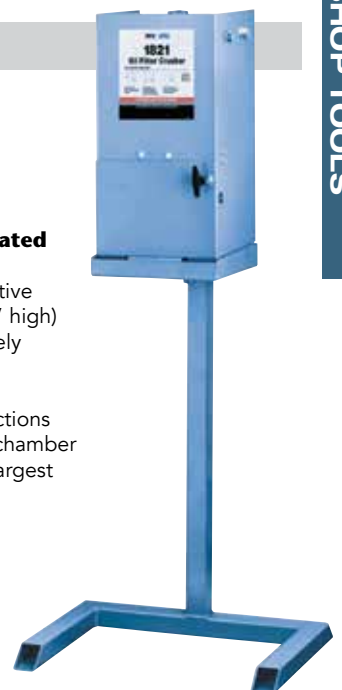

FLUID AND GREASE

Oil Filter Crushers



DOWHDC150 Heavy-Duty Truck Filter Crusher

- Heavy-duty aluminum frame cabinet surrounds the high pressure hydraulic hose for added safety and shields components from damage
- Handles filters 13" in height; 6" in diameter
- Specially designed door channel prevents drips and leakage, keeping oil in the chamber and not on the floor



DOWFS400 Deluxe Floor Stand

- All steel construction
- Includes separate counter top drain
- Includes an area to drain used filters before crushing
- For AFC-100-94 and HDC-150-94
- Accommodates a 16-gallon drum
- Measures 28"W x 23"D x 38"H



DOWHDC-150-18DC HD Oil Filter Crusher Combo Promo

- Free 18 Gallon Oil Drain
- Oil Drain Fits Under The Floor Stand to take up less floor space
- 15 Tons of crushing force on the filter crusher
- Oil Drain utilizes shop air to self evacuate when full
- Crusher accommodates filters up to 13" in height



Gas Caddies



DOWFC-25DC 25 Gallon UL Listed Steel Diesel Caddy Tank

- 25 gallon capacity steel tank
- Complies with OSHA guidelines
- UL Listed 2 way cast iron pump
- Fill level gauge
- 8' PVC suction/discharge hose with internal ground wire
- 1 yr warranty on material and workmanship

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DOWFC-25GC 25 Gallon Gas Caddy UL

- UL Listed; complies with OSHA guidelines
- Fill level gauge
- Combination vent and fill cap
- Heavy duty steel wheels
- 8' PVC suction/discharge hose with internal steel grounding wire



25-gallon UL listed gas caddy which is designed for the professional automotive service facility. It is tested and approved to UL requirements for leakage, rupture, stability, abuse and endurance.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLUID AND GREASE

Gas Caddies



LIN3675

25 Gallon Fuel Caddy

- Heavy-duty welded steel tank
- 2-way rotary pump dispenses or extracts fuel at a rate of 1 gallon per 12 revolutions
- Easy-to-read sight gauge clearly indicates fuel volume in tank
- 7' (2.1 m) wire-reinforced fluid transfer hose with anti-spark tip and internal ground wire
- Screened filler neck allows fuel to be poured in manually



LIN3677

25 Gallon Fuel Caddy with 2 Way Filter System

- Welded steel tank with automatic 2-way filter system uses two common spin-on filters to remove particulates

Fluid Containers - Gas



JUS7120100

Red Metal Safety Can, Type 1, Two Gallon Capacity, for Gasoline and Other Flammable Liquids

- Large ID zone permits user labeling of contents to avoid misuse
- Stainless steel flame arrester for exceptional corrosion protection - reliably dissipates heat to prevent flashback ignition Long 3-1/2" (88mm) length arrester allows safe, secure placement of gas nozzle
- Gasoline, Gas-Oily Mixture, Kerosene, Diesel



Fluid Containers - Diesel



JUS7150210

Yellow Metal Safety Can, Type 1, Five Gallon, with Yellow Plastic Funnel, for Diesel Fuel



Fluid Containers - Oil / Multipurpose



LIS19702

8 Qt. Dispenser with Lid and Cap

- Translucent polyethylene material enables the user to read the oil level on the container up to 8 quarts and is marked in both quarts and liters
- Flexible, removable 8" pouring spout enables easy transfer of liquid



LIS19732

6 Quart Translucent 8" Pouring Spout Oil Filler

- Marked in both quarts and liters
- Flexible 8" pouring spout
- 6 quart oil dispensers are made of translucent (see through) polyethylene material, that enables the user to read the liquid level on the container



Translucent Measuring Pitcher with Flexible Spout

KTI74651 - 5-Liter

KTI74650 - 2-Liter

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



KTI74656

6 Quart Plastic Measure Flex Spout with Dust Cap

- Translucent body provides visibility to liquid level inside
- Graduated in Quarts and Litres
- 18.25" long with spout attached
- Covered by a 1-Year Warranty



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FLUID AND GREASE

Fluid Containers



NPGDRM659-BK

**New Pig® Latching Drum Lid
for 55 Gallon Drum, Black**

- Latching handle easily opens and closes with one hand
- Nitrile gasket and locking mechanism seal lid to help reduce vapor emissions and keep drum contents dry and secure
- Easy-access lid closes securely to help you meet hazardous-waste regulations
- Durable, chemical-resistant powder coat
- Hinge pin is made for easy lid removal without loosening band around drum
- Lifetime warranty does not cover abuse

Transfer Cans



JUS09700

**21 Gallon Foot Operated
Cover, Oily Waste Can**

- Lid opens to no more than 60 degrees and stays closed when not in use, isolating contents from fire sources and limiting oxygen to virtually eliminate the risk of spontaneous combustion
- Round construction and elevated base allow circulation of air around can to disperse heat and reduce moisture build-up and rusting

Oily Waste Can with Lever, Red

JUS09500 - 14 Gallon

JUS09300 - 10 Gallon

JUS09100 - 6 Gallon

FABRICATION EQUIPMENT

Assortment Kits



Assortment Kits

- Contains product assortment map for easy identification of components
- Packaged in a multicompartiment, refillable plastic case



KTI00095

**419 Piece Metric
O-Ring Assortment**

- Sizes range from 3mm to 50mm I.D.
- Stored in a plastic red case by size
- Durable rubber construction
- Set includes 32 different products for various applications

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Hose Clamp Sets

- Stainless Steel Band for Maximum Resistance to Corrosion
- Versatile, Easily Maintained, Reusable and Maintains Strength Under Pressure



Part #	Description
KTI00071	150 Piece Hitch Pin Assortment Kit
KTI00072	300 Piece E-Clip Assortment Kit
KTI00077	300 Piece Snap Ring Assortment Kit
KTI00084	170 Piece U-Clip and Screw Assortment Kit
KTI00085	200 Piece Hex Head Washer Drill Assortment
KTI00089	110 Piece Copper Washer Assortment Kit
KTI00091	125 Piece Grommet Assortment Kit
KTI00093	120 Piece Roll Pin Assortment Kit

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Part #	Description
KTI05024	Set of 4 Hose Clamps 1-5/16" thru 2-1/4"

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

FABRICATION EQUIPMENT



HECSPPIENOTCH 2" Pipe and Tube Hole Saw Notcher

- Ability to create any angle saddle notch for weld fit up
- Use with any 1/2" drill motor or drill press
- Holds up to 2" pipe; uses up to 2-1/2" standard hole saws



HECSP3-1-12 12" 3 in 1 Bend-Roll-Shear Machine

- Shear, brake and roll with one machine
- 5 adjustable hardened fingers for building boxes and pans
- 1-1/2" diameter slip rolls with 1/16", 1/8" and 3/16" grooves for wire rolling
- 20 gauge capacity

HECWFBR6 18" Bead Roller Kit

- 18" throat depth
- 18" gauge capacity mild steel
- 1/2" steel construction
- Includes 6 sets of dies - 1/4", 3/8" and 1/2" bead roll, 1/16", 1/8" and 1/4" step dies



HECWFBOS16 BOSS 16 Gauge Box and Pan Brake

- Maximum box depth 4"
- 48" 16 gauge box and pan brake
- Upper beam is adjustable for radius bending
- Bend angle stop 0-130 degrees
- Includes counter weight, depth stop and stand
- 1 yr warranty on material and workmanship



HECSPBENDKIT Pipe and Tube Bending Kit

- 3/8", 1/2", 5/8", 9/16", 3/4", 7/8" rounds 3/4" and 1" square tube
- Rugged cast iron construction
- Mount to bench top or vise
- Includes storage case



HECWFB2 Manual Pipe and Tube Bender

- Bends up to 2" diameter tubing
- CNC machined components
- Includes degree ring and handle
- Ratcheting style handle improves leverage
- Dies available for round and square tubing (sold separate)

HECSPHS8 8" Throatless Hand Shear

- 8" blade length
- Throatless design - cut any length and width
- 3/16" capacity - mild steel, 1/4" aluminum
- Incorporated 3/8" round bar cutter
- Indexable bottom blade



HECWFS-5 Throatless Hand Shear - Multi Purpose Cutter

- Multi purpose sheet metal/plastic cutter
- Cuts up to 14 gauge mild steel, 18 gauge stainless steel
- 5" blade length
- Geared reduction handle makes cutting easy

